


# Oil Miser®

**A WATER HEATER WITH A BOILER ATTITUDE**

THIS VERSATILE COMPACT UNIT CAN BE USED FOR **HYDRONIC HEATING**

**MODEL: OM-180**

**81 Lb. Weight Allows For One Person Installation**

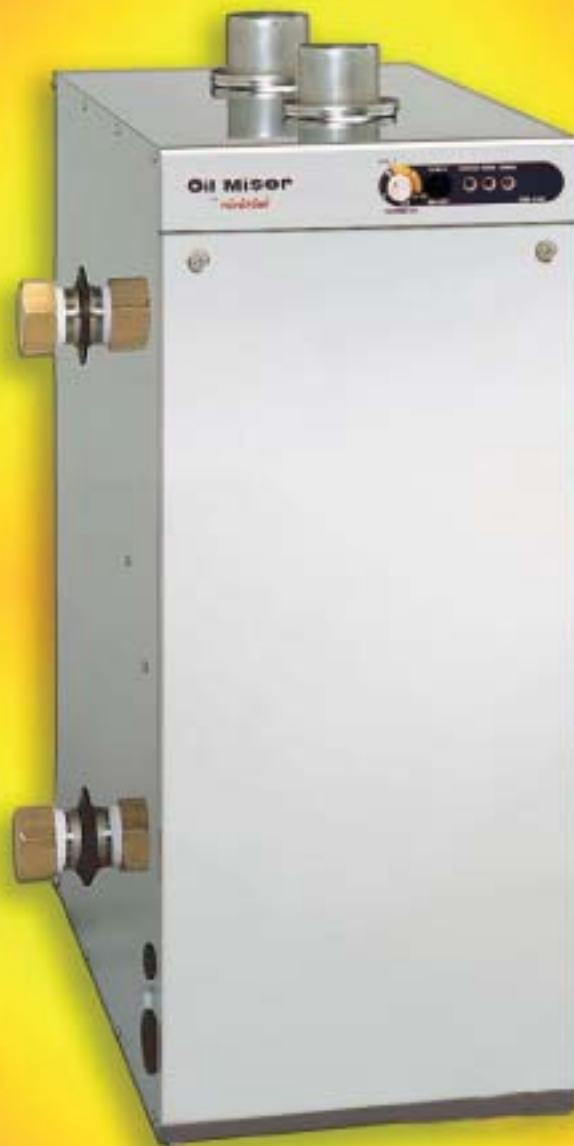

**Direct Vent or Chimney Vent**

**High Efficiency**

**Inlets/Outlets on both sides for ease of installation**

# SPECIFICATIONS

Model:	OM-180 (Stainless Steel Cabinet and Heat Exchanger; Home and Mobile Home Approved)
Type:	Combustion Type: Pressure Vapor
Flue Pipe and Chimney Connection:	Forced Flue
Heating Supply System:	On Demand
Listed:	Conforms to UL 732 and UL 307A
Purpose:	Hot Water Supply, Hydronic Heating*
Ignition:	High Voltage Discharge Spark
Fuel:	ASTM D396 No.2 or No.1 Fuel Oil, ASTM D3699 1-K Kerosene
Efficiency:	86.5% AFUE rating
Heat Rating (Input):	148,000 BTU/h
Maximum Hot Water Temperature:	180°F (Approximately)
Flow Rate/ Temperature Rise:	6.2 gal/min (40 °F rise), 5.0 gal/min (50 °F rise) 4.1 gal/min (60 °F rise), 3.5 gal/min (70 °F rise) 3.1 gal/min (80 °F rise)
Fuel Consumption:	1.05 gal/h
Capacity of Heat Exchanger:	5.10 gal
Temperature Differential Settings:	3.6°F, 18°F, 36°F (3 settings by selector switch)
Fuel system:	External tank **
Dimensions (W x H x D):	12-5/8" x 27-3/4" x 22-1/2"
Weight:	81 lbs. Empty
Vent Pipe Hole:	4-3/4" diameter (for flue pipe installation kit)
Maximum Length of Vent Pipe System:	10 ft., 3 bends or less (exhaust pipes for flue pipe installation kit)
Electrical Rating:	120 Volts AC, 60 Hz Ignition - 120W Burning - 98W
Required Accessories:	Flue Pipe Installation Kit or 5 inch Chimney Adapter Kit Fuel filter and Drain valve
Safety Device:	Ignition safety device, High Limit Thermistor, Heat exchanger bi-metal switch, Temperature fuse, Fusible link valve Exhaust Air Temperature: less than 500°F Temp & pressure relief valve (included)

Nozzle Size:	0.85 GPH
Spraying Angle:	60°
Spray Pattern:	Delavan Type XA
Temperature Fuse:	282°F
Electric Current Fuse:	5 A (Main Control) 7 A (Auxiliary Port for Circulation Pump, etc.)
Optional Accessories:	Remote Controller

\*Check State and Local codes/ordinances for permitted use.

\*\* External tank to be purchased from local suppliers.



## TOYOTOMI

TOYOTOMI USA, INC.

604 Federal Road, Brookfield, CT 06804-0176

TEL: (203) 775-1909, FAX: (203) 775-6330

E-mail: [productinfo@toyotomiusa.com](mailto:productinfo@toyotomiusa.com)

Website: [www.toyotomiusa.com](http://www.toyotomiusa.com)

