



Air Conditioning & Heating

# SSX14

## 1½- TO 5-TON HIGH-EFFICIENCY SPLIT SYSTEM AIR CONDITIONERS

### UP TO 15 SEER

### R-410A

**COOLING CAPACITY: 18,000 TO 56,800 BTU/H**

#### Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency Copeland® scroll compressor
- High- and low-pressure switches
- High-quality compressor sound blanket
- 850 RPM condenser fan motor
- Factory-installed liquid-line filter drier
- Service valves with sweat connections and gauge ports
- Copper tube/enhanced aluminum fin coil
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

#### Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



#### Contents

Nomenclature .....	2
Product Specifications .....	3
Expanded Cooling Data .....	4
AHRI Ratings.....	20
Wiring Diagram.....	35
Dimensions .....	36
Accessories .....	36



\* Complete warranty details available from your local dealer or at [www.goodmamfg.com](http://www.goodmamfg.com). To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home) and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.



# NOMENCLATURE

	S	S	X	14	036	1	A	A
	1	2	3	4,5	6,7,8	9	10	11
<b>Brand</b>							<b>Engineering *</b>	
G Goodman® (Standard Feature Set Models)							Minor Revision	
S Goodman® (High Feature Set Models)							<b>Engineering *</b>	
							Major Revision	
<b>Product Category</b>							<b>Electrical</b>	
S Split System							1 208/230 V, 1 Phase, 60 Hz	
							2 220/240 V, 1 Phase, 50 Hz	
							3 208/230 V, 3 Phase, 60 Hz	
							4 460 V, 3 Phase, 60 Hz	
							5 380/415 V, 3 Phase, 50 Hz	
<b>Unit Type</b>							<b>Nominal Capacity</b>	
C Condenser R-22							018 1½ Tons	
X Condenser R-410A							024 2 Tons	
H Heat Pump R-22							030 2½ Tons	
Z Heat Pump R-410A							090 7½ tons	
							036 3 Tons	
							042 3½ Tons	
<b>Efficiency</b>							120 10 Tons	
13 13 SEER								
14 14 SEER								
16 16 SEER								

\* Neither used for order entry or inventory management.



**SPECIFICATIONS**

	SSX14 0181B	SSX14 0241B	SSX14 0301B	SSX14 0361B	SSX14 0421C	SSX14 0481B	SSX14 0601A
<b>COOLING CAPACITY</b>							
Nominal Cooling (BTU/h)	18,000	24,000	28,800	34,600	40,000	45,000	56,800
Decibels	71	71	72	73	73	74	75
<b>COMPRESSOR</b>							
RLA	9.0	13.4	12.8	14.1	16.7	19.9	26.4
LRA	48.0	58.3	64	77	79.0	109	134
<b>CONDENSER FAN MOTOR</b>							
Horsepower (RPM)	1/6	1/12	1/6	1/6	1/6	¼	¼
FLA	1.10	0.60	1.10	1.10	1.10	1.50	1.60
<b>REFRIGERATION SYSTEM</b>							
Refrigerant Line Size <sup>1</sup>							
Liquid Line Size ("O.D.)	¾"	¾"	¾"	¾"	¾"	¾"	¾"
Suction Line Size ("O.D.)	¾"	¾"	¾"	¾"	1½"	1½"	1½"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	¾"	¾"	¾"	¾"	¾"	¾"	¾"
Suction Valve Size ("O.D.)	¾"	¾"	¾"	¾"	¾"	¾"	¾"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	70	88	93	98	137	147	268
Shipped with Orifice Size	0.052	0.055	0.065	0.068	0.070	0.078	0.088
<b>ELECTRICAL DATA</b>							
Voltage-Hz / Phase	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1
Minimum Circuit Ampacity <sup>2</sup>	12.4	17.5	17.1	18.7	22.0	26.4	34.6
Max. Overcurrent Protection <sup>3</sup>	20	30	30	30	35	45	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"
<b>SHIP WEIGHT (LBS)</b>	146	156	172	172	184	236	280

<sup>1</sup> Tested and rated in accordance with ARI Standard 210/240

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply ¾" to 1½" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of ¾" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT, NOT THE INDOOR COIL.

# EXPANDED COOLING DATA — SSX140181BA / CA\*F3636\*6C\*

IDB	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
	65°F				75°F				85°F				95°F				105°F				115°F				
	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
525	MBh	16.7	17.3	18.9	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.5	16.1	17.6	-	14.7	15.3	16.7	-	13.7	14.2	15.5	-
	S/T	0.67	0.56	0.38	-	0.69	0.58	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.76	0.64	0.44	-
	ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-
	kW	2.00	2.03	2.08	-	2.11	2.14	2.19	-	2.20	2.24	2.29	-	2.29	2.33	2.38	-	2.36	2.40	2.46	-	2.42	2.46	2.53	-
	Amps	4.5	4.6	4.7	-	4.8	4.9	5.1	-	5.2	5.3	5.5	-	5.5	5.7	5.8	-	5.9	6.0	6.2	-	6.2	6.3	6.5	-
	Hi PR	208	224	237	-	234	252	266	-	266	286	302	-	303	326	344	-	341	367	387	-	377	405	428	-
	Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-
	MBh	18.1	18.7	20.5	-	17.7	18.3	20.0	-	17.2	17.9	19.6	-	16.8	17.4	19.1	-	16.0	16.6	18.1	-	14.8	15.3	16.8	-
	S/T	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.79	0.66	0.46	-
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-
600	kW	2.03	2.07	2.11	-	2.15	2.18	2.23	-	2.25	2.28	2.34	-	2.33	2.37	2.43	-	2.41	2.45	2.51	-	2.47	2.51	2.58	-
	Amps	4.6	4.7	4.8	-	4.9	5.0	5.2	-	5.3	5.4	5.6	-	5.7	5.8	6.0	-	6.0	6.2	6.4	-	6.4	6.5	6.7	-
	Hi PR	215	231	244	-	241	260	274	-	274	295	312	-	312	336	355	-	351	378	399	-	388	418	441	-
	Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-
	MBh	18.6	19.3	21.1	-	18.2	18.8	20.7	-	17.8	18.4	20.2	-	17.3	18.0	19.7	-	16.5	17.1	18.7	-	15.2	15.8	17.3	-
	S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
	kW	2.05	2.08	2.12	-	2.16	2.19	2.25	-	2.26	2.30	2.35	-	2.35	2.39	2.45	-	2.42	2.46	2.53	-	2.49	2.53	2.59	-
	Amps	4.6	4.7	4.9	-	5.0	5.1	5.2	-	5.4	5.5	5.7	-	5.7	5.9	6.0	-	6.1	6.2	6.4	-	6.4	6.6	6.8	-
	Hi PR	217	234	247	-	244	262	277	-	277	298	315	-	315	340	359	-	355	382	403	-	392	422	446	-
Lo PR	109	116	126	-	115	122	133	-	119	127	139	-	125	133	146	-	131	140	152	-	136	144	158	-	

525	MBh	17.0	17.5	18.9	20.3	16.6	17.1	18.5	19.8	16.2	16.7	18.0	19.4	15.8	16.3	17.6	18.9	15.0	15.4	16.7	17.9	13.9	14.3	15.5	16.6
	S/T	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.87	0.78	0.59	0.38
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11
	kW	2.01	2.04	2.09	2.14	2.12	2.15	2.20	2.26	2.22	2.25	2.31	2.37	2.30	2.34	2.40	2.46	2.38	2.42	2.48	2.54	2.44	2.48	2.54	2.61
	Amps	4.5	4.6	4.7	4.9	4.8	4.9	5.1	5.3	5.2	5.4	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.1	6.2	6.5	6.3	6.4	6.6	6.8
	Hi PR	211	227	239	250	236	254	269	280	269	289	305	319	306	329	348	363	344	371	391	408	380	409	432	451
	Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	122	129	141	150	127	136	148	158	132	140	153	163
	MBh	18.4	18.9	20.5	22.0	18.0	18.5	20.0	21.5	17.5	18.0	19.5	21.0	17.1	17.6	19.1	20.5	16.2	16.7	18.1	19.4	15.0	15.5	16.8	18.0
	S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.81	0.61	0.39
	ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	22	20	17	12	21	19	16	11
600	kW	2.05	2.08	2.12	2.17	2.16	2.19	2.25	2.30	2.26	2.30	2.35	2.41	2.35	2.39	2.45	2.51	2.42	2.46	2.53	2.59	2.49	2.53	2.60	2.66
	Amps	4.6	4.7	4.9	5.0	5.0	5.1	5.2	5.4	5.4	5.5	5.7	5.9	5.7	5.9	6.0	6.3	6.1	6.2	6.4	6.7	6.4	6.6	6.8	7.0
	Hi PR	217	234	247	257	244	262	277	289	277	298	315	328	316	340	359	374	355	382	403	421	392	422	446	465
	Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	145	158	168
	MBh	18.9	19.5	21.1	22.6	18.5	19.0	20.6	22.1	18.1	18.6	20.1	21.6	17.6	18.1	19.6	21.1	16.7	17.2	18.6	20.0	15.5	16.0	17.3	18.5
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.94	0.84	0.64	0.41
	ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
	kW	2.06	2.09	2.14	2.19	2.17	2.21	2.26	2.31	2.27	2.31	2.37	2.43	2.36	2.40	2.46	2.53	2.44	2.48	2.54	2.61	2.50	2.55	2.61	2.68
	Amps	4.7	4.8	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.6	6.8	7.1
	Hi PR	219	236	249	260	246	265	280	292	280	301	318	332	319	343	362	378	359	386	407	425	396	426	450	470
Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	

kW = Total system power  
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.



EXPANDED COOLING DATA — SSX140241BA / CA\*F3636\*6C\*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	23.4	24.2	26.5	-	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.7	22.5	24.7	-	20.7	21.4	23.5	-	19.1	19.8	21.7	-
		S/T	0.65	0.54	0.37	-	0.67	0.56	0.39	-	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.74	0.61	0.43	-	0.74	0.62	0.43
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-
		kW	1.60	1.63	1.68	-	1.72	1.75	1.81	-	1.82	1.86	1.92	-	1.91	1.95	2.02	-	1.99	2.03	2.10	-	2.06	2.10	2.17
	Amps	5.8	6.0	6.2	-	6.3	6.5	6.7	-	6.9	7.0	7.3	-	7.3	7.5	7.8	-	7.8	8.0	8.3	-	8.3	8.5	8.8	-
		Hi PR	233	250	264	-	261	281	297	-	297	320	337	-	338	364	384	-	380	409	432	-	420	452	478
	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-
		MBh	23.6	24.5	26.8	-	23.1	23.9	26.2	-	22.5	23.3	25.6	-	22.0	22.8	24.9	-	20.9	21.6	23.7	-	19.3	20.0	21.9
	S/T	0.65	0.54	0.38	-	0.68	0.56	0.39	-	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.75	0.63	0.43	-
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12
	kW	1.62	1.65	1.70	-	1.74	1.77	1.83	-	1.84	1.88	1.94	-	1.93	1.97	2.04	-	2.01	2.06	2.12	-	2.08	2.13	2.19	-
		Amps	5.9	6.1	6.2	-	6.4	6.5	6.8	-	6.9	7.1	7.3	-	7.4	7.6	7.9	-	7.9	8.1	8.4	-	8.4	8.6	8.9
Hi PR	236	254	268	-	265	285	301	-	301	324	342	-	343	369	389	-	385	415	438	-	426	458	484	-	
	Lo PR	106	113	123	-	112	119	130	-	117	124	136	-	123	130	142	-	128	137	149	-	133	141	154	-
MBh	24.4	25.3	27.7	-	23.9	24.7	27.1	-	23.3	24.1	26.5	-	22.7	23.6	25.8	-	21.6	22.4	24.5	-	20.0	20.7	22.7	-	
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-
ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-	
	kW	1.64	1.67	1.72	-	1.76	1.80	1.85	-	1.87	1.91	1.97	-	1.96	2.01	2.07	-	2.04	2.09	2.16	-	2.11	2.16	2.23	-
Amps	6.0	6.2	6.4	-	6.5	6.7	6.9	-	7.1	7.2	7.5	-	7.6	7.7	8.0	-	8.0	8.2	8.5	-	8.5	8.7	9.0	-	
	Hi PR	240	259	273	-	270	290	307	-	307	330	349	-	349	376	397	-	393	423	447	-	434	467	494	-
Lo PR	108	115	126	-	115	122	133	-	119	127	138	-	125	133	145	-	131	139	152	-	136	144	157	-	

75	MBh	23.8	24.5	26.5	28.4	23.2	23.9	25.9	27.8	22.7	23.3	25.3	27.1	22.1	22.8	24.6	26.4	21.0	21.6	23.4	25.1	19.5	20.0	21.7	23.3
		S/T	0.73	0.66	0.50	0.32	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.84	0.75	0.57
	ΔT	23	21	17	12	23	21	17	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11
		kW	1.61	1.64	1.69	1.75	1.73	1.77	1.82	1.88	1.84	1.87	1.93	2.00	1.93	1.97	2.03	2.10	2.01	2.05	2.12	2.19	2.08	2.12	2.19
	Amps	5.9	6.0	6.2	6.5	6.4	6.5	6.7	7.0	6.9	7.1	7.3	7.6	7.4	7.6	7.8	8.1	7.9	8.1	8.3	8.7	8.3	8.5	8.8	9.2
		Hi PR	235	253	267	279	264	284	300	313	300	323	341	356	342	368	388	405	384	414	437	456	425	457	483
	Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	158	133	141	154	164
		MBh	24.0	24.7	26.8	28.7	23.4	24.1	26.1	28.0	22.9	23.6	25.5	27.4	22.3	23.0	24.9	26.7	21.2	21.8	23.6	25.4	19.6	20.2	21.9
	S/T	0.74	0.66	0.50	0.32	0.77	0.69	0.52	0.33	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.76	0.57	0.37	0.85	0.76	0.58	0.37
		ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16
	kW	1.63	1.66	1.71	1.77	1.75	1.79	1.84	1.90	1.86	1.89	1.95	2.02	1.95	1.99	2.05	2.12	2.03	2.07	2.14	2.21	2.10	2.14	2.21	2.29
		Amps	6.0	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.4	8.8	8.4	8.7	8.9
Hi PR	238	256	271	282	267	288	304	317	304	327	345	360	346	372	393	410	389	419	442	462	430	463	489	510	
	Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	161	134	143	156	166
MBh	24.8	25.6	27.7	29.7	24.3	25.0	27.0	29.0	23.7	24.4	26.4	28.3	23.1	23.8	25.8	27.6	22.0	22.6	24.5	26.3	20.3	20.9	22.7	24.3	
	S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39
ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	19	17	14	10	
	kW	1.65	1.69	1.74	1.79	1.78	1.81	1.87	1.93	1.88	1.92	1.99	2.05	1.98	2.02	2.09	2.16	2.06	2.11	2.17	2.25	2.13	2.18	2.25	2.32
Amps	6.1	6.2	6.4	6.7	6.6	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	
	Hi PR	243	261	276	288	273	293	310	323	310	334	352	367	353	380	401	418	397	427	451	471	439	472	499	520
Lo PR	110	117	127	135	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169	

kW = Total system power  
Amps = outdoor unit amps (comp. + fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — SSX140241BA / CA\*F3636\*6C\* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	700	MBh	24.2	24.7	26.4	28.2	23.6	24.1	25.8	27.6	23.1	23.6	25.2	26.9	22.5	23.0	24.6	26.3	21.4	21.8	23.3	24.9	19.8	20.2	21.6	23.1
		S/T	0.81	0.76	0.61	0.46	0.83	0.78	0.64	0.48	0.86	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.92	0.87	0.71	0.53
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16	
	kW	1.62	1.66	1.71	1.76	1.74	1.78	1.84	1.89	1.85	1.89	1.95	2.01	1.94	1.99	2.05	2.12	2.02	2.07	2.13	2.20	2.09	2.14	2.21	2.28	
	Amps	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.3	
	Hi PR	237	255	270	281	266	287	303	316	303	326	344	359	345	371	392	409	388	418	441	460	429	462	487	508	
	Lo PR	107	114	124	132	113	120	131	140	118	125	137	145	123	131	143	153	129	138	150	160	134	142	155	166	
	MBh	24.4	25.0	26.7	28.5	23.9	24.4	26.1	27.8	23.3	23.8	25.4	27.2	22.7	23.2	24.8	26.5	21.6	22.1	23.6	25.2	20.0	20.4	21.8	23.3	
	S/T	0.81	0.76	0.62	0.46	0.84	0.79	0.64	0.48	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.93	0.88	0.71	0.53	
	ΔT	25	24	21	17	26	24	21	17	26	24	21	17	26	25	21	17	25	24	21	17	24	23	20	16	
kW	1.64	1.67	1.73	1.78	1.76	1.80	1.86	1.91	1.87	1.91	1.97	2.03	1.96	2.01	2.07	2.14	2.05	2.09	2.16	2.23	2.11	2.16	2.23	2.31		
Amps	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.1	7.1	7.2	7.5	7.8	7.6	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.4		
Hi PR	241	259	273	285	270	290	307	320	307	330	349	364	350	376	397	414	393	423	447	466	435	468	494	515		
Lo PR	108	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	139	152	162	136	144	158	168		
MBh	25.3	25.8	27.6	29.5	24.7	25.2	27.0	28.8	24.1	24.6	26.3	28.1	23.5	24.0	25.7	27.5	22.3	22.8	24.4	26.1	20.7	21.2	22.6	24.2		
S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.93	0.76	0.57		
ΔT	22	21	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	21	20	17	14		
kW	1.67	1.70	1.75	1.81	1.79	1.83	1.88	1.94	1.90	1.94	2.00	2.07	2.00	2.04	2.10	2.17	2.08	2.12	2.19	2.26	2.15	2.20	2.27	2.34		
Amps	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.2	7.4	7.6	7.9	7.7	7.9	8.1	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.5		
Hi PR	245	264	279	291	275	296	313	326	313	337	356	371	357	384	405	423	401	432	456	476	443	477	504	525		
Lo PR	111	118	128	137	117	124	136	145	121	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171		

85	700	MBh	24.6	25.1	26.3	28.0	24.0	24.5	25.7	27.4	23.5	23.9	25.1	26.7	22.9	23.3	24.4	26.1	21.7	22.2	23.2	24.8	20.1	20.5	21.5	22.9
		S/T	0.84	0.81	0.73	0.60	0.87	0.84	0.76	0.62	0.90	0.87	0.78	0.63	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.97	0.93	0.84	0.68
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	26	22	26	25	24	21	
	kW	1.64	1.67	1.72	1.77	1.76	1.79	1.85	1.91	1.87	1.90	1.96	2.03	1.96	2.00	2.07	2.13	2.04	2.08	2.15	2.22	2.11	2.16	2.23	2.30	
	Amps	6.0	6.1	6.3	6.6	6.5	6.6	6.9	7.1	7.0	7.2	7.5	7.7	7.5	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.3	
	Hi PR	240	258	272	284	269	290	306	319	306	329	348	363	349	375	396	413	392	422	446	465	433	466	492	513	
	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
	MBh	24.9	25.3	26.5	28.3	24.3	24.7	25.9	27.7	23.7	24.2	25.3	27.0	23.1	23.6	24.7	26.3	22.0	22.4	23.5	25.0	20.3	20.7	21.7	23.2	
	S/T	0.85	0.82	0.74	0.60	0.88	0.85	0.77	0.62	0.91	0.87	0.79	0.64	0.94	0.90	0.81	0.66	0.97	0.94	0.85	0.69	0.98	0.94	0.85	0.69	
	ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	27	27	25	22	25	25	23	20	
kW	1.65	1.69	1.74	1.79	1.78	1.81	1.87	1.93	1.88	1.92	1.99	2.05	1.98	2.02	2.09	2.16	2.06	2.11	2.17	2.25	2.13	2.18	2.25	2.32		
Amps	6.1	6.2	6.4	6.7	6.6	6.7	6.9	7.2	7.1	7.3	7.6	7.8	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5		
Hi PR	243	261	276	288	273	293	310	323	310	334	352	367	353	380	401	419	397	428	451	471	439	472	499	520		
Lo PR	110	117	127	136	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169		
MBh	25.7	26.2	27.5	29.3	25.1	25.6	26.8	28.6	24.5	25.0	26.2	27.9	23.9	24.4	25.5	27.3	22.7	23.2	24.3	25.9	21.1	21.5	22.5	24.0		
S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.73		
ΔT	24	23	22	19	24	24	22	19	24	24	22	19	24	24	23	20	23	24	22	19	22	22	21	18		
kW	1.68	1.71	1.77	1.82	1.80	1.84	1.90	1.96	1.91	1.96	2.02	2.08	2.01	2.06	2.12	2.19	2.10	2.14	2.21	2.28	2.17	2.21	2.29	2.36		
Amps	6.2	6.3	6.5	6.8	6.7	6.8	7.1	7.3	7.3	7.4	7.7	8.0	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.6		
Hi PR	248	267	282	294	278	299	316	330	316	340	359	375	360	388	409	427	405	436	460	480	448	482	509	531		
Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	159	135	144	157	167	140	149	162	173		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX140301BA / CA\*F3642\*6C\*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	875	MBh	25.3	26.2	28.7	-	24.7	25.6	28.1	-	24.1	25.0	27.4	-	23.5	24.4	26.7	-	22.3	23.2	25.4	-	20.7	21.5	23.5	-
		S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.79	0.66	0.45	-
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
		kW	1.92	1.96	2.01	-	2.05	2.09	2.15	-	2.17	2.21	2.27	-	2.27	2.31	2.38	-	2.35	2.40	2.47	-	2.43	2.47	2.55	-
		Amps	6.8	6.9	7.1	-	7.3	7.5	7.7	-	7.9	8.1	8.3	-	8.4	8.6	8.9	-	8.9	9.1	9.4	-	9.4	9.7	10.0	-
		Hi PR	217	234	247	-	244	262	277	-	277	298	315	-	316	340	359	-	355	382	404	-	393	423	446	-
	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	148	-	131	140	153	-	
	1000	MBh	27.4	28.4	31.1	-	26.8	27.7	30.4	-	26.1	27.1	29.7	-	25.5	26.4	28.9	-	24.2	25.1	27.5	-	22.4	23.2	25.5	-
		S/T	0.71	0.59	0.41	-	0.74	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-
		ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		kW	1.97	2.00	2.06	-	2.10	2.14	2.20	-	2.22	2.26	2.32	-	2.32	2.36	2.43	-	2.41	2.45	2.53	-	2.48	2.53	2.61	-
		Amps	7.0	7.1	7.3	-	7.5	7.7	7.9	-	8.1	8.3	8.6	-	8.6	8.8	9.1	-	9.2	9.4	9.7	-	9.7	9.9	10.3	-
Hi PR		224	241	255	-	251	271	286	-	286	308	325	-	326	350	370	-	366	394	416	-	405	436	460	-	
Lo PR	108	115	126	-	115	122	133	-	119	127	138	-	125	133	145	-	131	139	152	-	136	144	157	-		
1125	MBh	28.2	29.3	32.0	-	27.6	28.6	31.3	-	26.9	27.9	30.6	-	26.3	27.2	29.8	-	24.9	25.8	28.3	-	23.1	23.9	26.2	-	
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-	
	kW	1.98	2.02	2.07	-	2.11	2.15	2.22	-	2.23	2.28	2.34	-	2.34	2.38	2.45	-	2.42	2.47	2.55	-	2.50	2.55	2.63	-	
	Amps	7.0	7.2	7.4	-	7.6	7.7	8.0	-	8.2	8.4	8.6	-	8.7	8.9	9.2	-	9.3	9.5	9.8	-	9.8	10.0	10.4	-	
	Hi PR	226	244	257	-	254	273	289	-	289	311	328	-	329	354	374	-	370	398	420	-	409	440	465	-	
Lo PR	110	116	127	-	116	123	134	-	120	128	140	-	126	134	147	-	132	141	154	-	137	146	159	-		

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
75	875	MBh	25.7	26.5	28.7	30.8	25.1	25.9	28.0	30.0	24.5	25.2	27.3	29.3	23.9	24.6	26.7	28.6	22.7	23.4	25.3	27.2	21.1	21.7	23.5	25.2
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.89	0.80	0.60	0.39
		ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10
		kW	1.94	1.97	2.03	2.09	2.07	2.11	2.17	2.23	2.18	2.23	2.29	2.36	2.28	2.33	2.40	2.47	2.37	2.42	2.49	2.57	2.44	2.49	2.57	2.65
		Amps	6.8	7.0	7.2	7.5	7.4	7.5	7.8	8.0	8.0	8.2	8.4	8.7	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.9	9.5	9.8	10.1	10.5
		Hi PR	220	236	249	260	246	265	280	292	280	301	318	332	319	343	363	378	359	386	408	425	397	427	451	470
	Lo PR	106	113	123	131	112	119	130	139	117	124	135	144	123	130	142	152	128	137	149	159	133	141	154	164	
	1000	MBh	27.9	28.7	31.1	33.3	27.2	28.0	30.3	32.6	26.6	27.4	29.6	31.8	25.9	26.7	28.9	31.0	24.6	25.4	27.4	29.5	22.8	23.5	25.4	27.3
		S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
		kW	1.98	2.02	2.07	2.13	2.11	2.15	2.22	2.28	2.23	2.28	2.34	2.41	2.34	2.38	2.45	2.53	2.43	2.47	2.55	2.63	2.50	2.55	2.63	2.71
		Amps	7.0	7.2	7.4	7.7	7.6	7.7	8.0	8.3	8.2	8.4	8.6	9.0	8.7	8.9	9.2	9.6	9.3	9.5	9.8	10.2	9.8	10.0	10.4	10.7
Hi PR		226	244	257	268	254	273	289	301	289	311	328	342	329	354	374	390	370	398	421	439	409	440	465	485	
Lo PR	110	117	127	135	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169		
1125	MBh	28.7	29.5	32.0	34.3	28.0	28.9	31.2	33.5	27.4	28.2	30.5	32.7	26.7	27.5	29.8	31.9	25.4	26.1	28.3	30.3	23.5	24.2	26.2	28.1	
	S/T	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42	
	ΔT	20	18	15	10	20	18	15	10	20	19	15	10	20	19	15	11	20	18	15	10	19	17	14	10	
	kW	1.99	2.03	2.09	2.15	2.13	2.17	2.23	2.30	2.25	2.29	2.36	2.43	2.35	2.40	2.47	2.55	2.44	2.49	2.57	2.65	2.52	2.57	2.65	2.73	
	Amps	7.1	7.2	7.5	7.7	7.6	7.8	8.0	8.3	8.3	8.4	8.7	9.0	8.8	9.0	9.3	9.6	9.3	9.6	9.9	10.2	9.9	10.1	10.5	10.8	
	Hi PR	229	246	260	271	257	276	291	304	292	314	331	346	332	358	378	394	374	402	425	443	413	444	469	489	
Lo PR	111	118	128	137	117	124	136	145	121	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)



EXPANDED COOLING DATA — SSX140301BA / CA\*F3642\*6C\* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	26.2	26.7	28.6	30.5	25.6	26.1	27.9	29.8	25.0	25.5	27.2	29.1	24.3	24.9	26.6	28.4	23.1	23.6	25.3	27.0	21.4	21.9	23.4	25.0
	S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.68	0.50	0.91	0.85	0.69	0.52	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75	0.56
	ΔT	23	22	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15
	kW	1.95	1.99	2.04	2.10	2.08	2.12	2.18	2.25	2.20	2.24	2.31	2.38	2.30	2.35	2.42	2.49	2.39	2.44	2.51	2.58	2.46	2.51	2.59	2.67
	Amps	6.9	7.1	7.3	7.5	7.4	7.6	7.8	8.1	8.0	8.2	8.5	8.8	8.6	8.8	9.1	9.4	9.1	9.3	9.6	10.0	9.6	9.8	10.2	10.5
	Hi PR	222	239	252	263	249	268	283	295	283	305	322	335	322	347	366	382	363	390	412	430	401	431	455	475
	Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	160	134	143	156	166
	MBh	28.4	29.0	31.0	33.1	27.7	28.3	30.2	32.3	27.0	27.6	29.5	31.6	26.4	27.0	28.8	30.8	25.1	25.6	27.4	29.2	23.2	23.7	25.3	27.1
	S/T	0.88	0.83	0.68	0.50	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.78	0.58
	ΔT	23	22	19	15	23	22	19	16	23	22	19	16	24	23	20	16	23	22	19	15	21	21	18	14
kW	1.99	2.03	2.09	2.15	2.13	2.17	2.23	2.30	2.25	2.29	2.36	2.43	2.35	2.40	2.47	2.55	2.44	2.49	2.57	2.65	2.52	2.57	2.65	2.73	
Amps	7.1	7.2	7.5	7.7	7.6	7.8	8.0	8.3	8.3	8.4	8.7	9.0	8.8	9.0	9.3	9.6	9.3	9.6	9.9	10.2	9.9	10.1	10.5	10.8	
Hi PR	229	246	260	271	257	276	292	304	292	314	332	346	332	358	378	394	374	402	425	443	413	444	469	490	
Lo PR	111	118	128	137	117	124	136	145	121	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171	
MBh	29.2	29.8	31.9	34.1	28.5	29.2	31.1	33.3	27.9	28.5	30.4	32.5	27.2	27.8	29.7	31.7	25.8	26.4	28.2	30.1	23.9	24.4	26.1	27.9	
S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.61	
ΔT	22	21	18	15	22	21	19	15	23	22	19	15	22	22	19	15	21	22	19	15	20	20	17	14	
kW	2.01	2.05	2.10	2.16	2.14	2.19	2.25	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.49	2.57	2.46	2.51	2.59	2.67	2.54	2.59	2.67	2.75	
Amps	7.1	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	8.9	9.1	9.4	9.7	9.4	9.7	10.0	10.3	10.0	10.2	10.5	10.9	
Hi PR	231	248	262	274	259	279	294	307	295	317	335	349	336	361	381	398	378	406	429	447	417	449	474	494	
Lo PR	112	119	130	138	118	126	137	146	123	131	142	152	129	137	150	159	135	144	157	167	140	149	162	173	
85	MBh	26.6	27.1	28.4	30.3	26.0	26.5	27.8	29.6	25.4	25.9	27.1	28.9	24.8	25.3	26.4	28.2	23.5	24.0	25.1	26.8	21.8	22.2	23.3	24.8
	S/T	0.89	0.86	0.78	0.63	0.93	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.89	0.73
	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	26	25	24	21	25	25	23	20	23	23	22	19
	kW	1.97	2.00	2.06	2.12	2.10	2.14	2.20	2.26	2.21	2.26	2.32	2.39	2.32	2.36	2.43	2.51	2.41	2.45	2.53	2.60	2.48	2.53	2.61	2.69
	Amps	7.0	7.1	7.3	7.6	7.5	7.7	7.9	8.2	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	9.2	9.4	9.7	10.1	9.7	9.9	10.3	10.6
	Hi PR	224	241	255	265	251	270	286	298	286	308	325	339	326	350	370	386	366	394	416	434	405	435	460	480
	Lo PR	108	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	139	152	162	136	144	157	168
	MBh	28.9	29.4	30.8	32.9	28.2	28.7	30.1	32.1	27.5	28.0	29.4	31.3	26.8	27.4	28.7	30.6	25.5	26.0	27.2	29.0	23.6	24.1	25.2	26.9
	S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75
	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	23	20	23	24	23	20	22	22	22	19
kW	2.01	2.05	2.10	2.16	2.14	2.19	2.25	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.49	2.57	2.46	2.51	2.59	2.67	2.54	2.59	2.67	2.75	
Amps	7.1	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	8.9	9.1	9.4	9.7	9.4	9.7	10.0	10.3	10.0	10.2	10.5	10.9	
Hi PR	231	248	262	274	259	279	294	307	295	317	335	349	336	361	381	398	378	406	429	447	417	449	474	494	
Lo PR	113	120	131	140	119	127	138	147	124	132	144	153	130	138	151	161	136	145	158	169	141	150	164	175	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSX140361A\* / CA\*F3642C6A\* / .067 ORIFICE

IDB	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE														
	65°F				75°F				85°F				95°F				105°F				115°F						
	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
<b>70</b>	AIRFLOW	MBh	33.9	35.1	38.5	-	33.1	34.3	37.6	-	32.3	33.5	36.7	-	31.5	32.7	35.8	-	30.0	31.1	34.0	-	27.8	28.8	31.5	-	
		S/T	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-	
	<b>1300</b>	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-	
		kW	2.40	2.45	2.52	-	2.57	2.62	2.70	-	2.72	2.77	2.85	-	2.85	2.91	2.99	-	2.96	3.02	3.11	-	3.05	3.12	3.22	-	
	<b>1150</b>	Amps	8.4	8.6	8.9	-	9.1	9.3	9.6	-	9.9	10.1	10.4	-	10.5	10.8	11.1	-	11.2	11.4	11.8	-	11.8	12.1	12.5	-	
		Hi PR	241	260	263	-	273	293	298	-	310	334	338	-	354	380	386	-	382	411	416	-	453	487	493	-	
	<b>1000</b>	Lo PR	120	124	135	-	123	127	139	-	127	131	144	-	131	135	147	-	133	138	150	-	137	141	154	-	
		MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.6	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	26.9	27.9	30.6	-	
	<b>75</b>	AIRFLOW	S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.79	0.66	0.45	-
			ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		<b>1300</b>	kW	2.38	2.43	2.50	-	2.55	2.60	2.68	-	2.70	2.75	2.83	-	2.83	2.88	2.97	-	2.94	3.00	3.09	-	3.03	3.09	3.19	-
			Amps	8.4	8.6	8.8	-	9.0	9.2	9.5	-	9.8	10.0	10.3	-	10.4	10.7	11.0	-	11.1	11.3	11.7	-	11.7	12.0	12.4	-
<b>1150</b>		Hi PR	239	257	261	-	270	291	295	-	307	330	335	-	350	376	382	-	378	406	412	-	448	482	489	-	
		Lo PR	119	122	133	-	122	126	137	-	126	130	142	-	130	134	146	-	132	136	149	-	135	140	152	-	
<b>1000</b>		MBh	30.4	31.5	34.5	-	29.7	30.8	33.7	-	29.0	30.0	32.9	-	28.3	29.3	32.1	-	26.9	27.8	30.5	-	24.9	25.8	28.2	-	
		S/T	0.66	0.55	0.38	-	0.68	0.57	0.40	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.76	0.63	0.44	-	
<b>75</b>		AIRFLOW	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
			kW	2.37	2.41	2.48	-	2.53	2.58	2.66	-	2.68	2.73	2.81	-	2.80	2.86	2.95	-	2.91	2.97	3.06	-	3.01	3.07	3.16	-
		<b>1300</b>	Amps	8.3	8.5	8.7	-	8.9	9.1	9.4	-	9.7	9.9	10.2	-	10.3	10.6	10.9	-	11.0	11.2	11.6	-	11.6	11.9	12.3	-
			Hi PR	237	254	258	-	268	288	292	-	304	327	332	-	347	373	378	-	374	402	408	-	444	477	484	-
	<b>1150</b>	Lo PR	117	121	132	-	121	125	136	-	125	129	141	-	128	132	144	-	131	135	147	-	134	138	151	-	
		MBh	34.5	35.5	38.4	41.2	33.7	34.7	37.5	40.3	32.9	33.8	36.6	39.3	32.1	33.0	35.7	38.4	30.5	31.4	34.0	36.4	28.2	29.1	31.5	33.8	
	<b>1000</b>	S/T	0.81	0.73	0.55	0.35	0.84	0.76	0.57	0.37	0.87	0.77	0.59	0.38	0.89	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41	
		ΔT	20	18	15	10	20	19	15	10	20	19	15	10	20	19	15	11	20	18	15	10	19	17	14	10	
	<b>75</b>	AIRFLOW	kW	2.40	2.45	2.52	2.59	2.57	2.62	2.70	2.78	2.72	2.77	2.85	2.94	2.85	2.91	2.99	3.09	2.96	3.02	3.11	3.21	3.05	3.12	3.22	3.32
			Amps	8.4	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.9	10.1	10.4	10.8	10.5	10.8	11.1	11.5	11.2	11.4	11.8	12.2	11.8	12.1	12.5	13.0
		<b>1300</b>	Hi PR	241	260	263	269	273	293	298	304	310	334	338	346	354	380	386	394	382	411	416	426	453	487	493	504
			Lo PR	120	124	135	144	123	127	139	148	127	131	144	153	131	135	147	157	133	138	150	160	137	141	154	164
<b>1150</b>		MBh	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.9	35.6	38.2	31.1	32.1	34.7	37.2	29.6	30.5	33.0	35.4	27.4	28.2	30.5	32.8	
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.39	0.89	0.80	0.60	0.39	
<b>1000</b>		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10	
		kW	2.38	2.43	2.50	2.57	2.55	2.60	2.68	2.76	2.70	2.75	2.83	2.92	2.83	2.88	2.97	3.06	2.94	3.00	3.09	3.19	3.03	3.09	3.19	3.29	
<b>75</b>		AIRFLOW	Amps	8.4	8.6	8.8	9.1	9.0	9.2	9.5	9.9	9.8	10.0	10.3	10.7	10.4	10.7	11.0	11.4	11.1	11.3	11.7	12.1	11.7	12.0	12.4	12.8
			Hi PR	239	257	261	266	270	291	295	301	307	330	335	343	350	376	382	390	378	406	412	421	448	482	489	499
		<b>1300</b>	Lo PR	119	122	133	142	122	126	137	146	126	130	142	151	130	134	146	155	132	136	149	158	135	140	152	162
			MBh	30.9	31.8	34.4	37.0	30.2	31.1	33.6	36.1	29.5	30.3	32.8	35.2	28.7	29.6	32.0	34.4	27.3	28.1	30.4	32.7	25.3	26.0	28.2	30.3
	<b>1150</b>	S/T	0.75	0.67	0.51	0.33	0.78	0.69	0.53	0.34	0.80	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.86	0.77	0.58	0.37	
		ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
	<b>1000</b>	kW	2.37	2.41	2.48	2.55	2.53	2.58	2.66	2.74	2.68	2.73	2.81	2.90	2.80	2.86	2.95	3.04	2.91	2.97	3.06	3.16	3.01	3.07	3.16	3.27	
		Amps	8.3	8.5	8.7	9.1	8.9	9.1	9.4	9.8	9.7	9.9	10.2	10.6	10.3	10.6	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.7	
	<b>75</b>	Hi PR	237	254	258	264	268	288	292	298	304	327	332	339	347	373	378	386	374	402	408	417	444	477	484	494	
		Lo PR	117	121	132	141	121	125	136	145	125	129	141	150	128	132	144	154	131	135	147	157	134	138	151	161	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (ITVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX140361A\* / CA\*F3642C6A\* / .067 ORIFICE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	35.1	35.9	38.3	41.0	34.3	35.0	37.4	40.0	33.5	34.2	36.5	39.0	32.6	33.4	35.6	38.1	31.0	31.7	33.9	36.2	28.7	29.4	31.4	33.5
	S/T	0.89	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	0.96	0.78	0.59
	ΔT	22	21	18	15	22	22	19	15	23	22	19	15	23	22	19	15	22	20	17	15	20	20	17	14
	kW	2.40	2.45	2.52	2.59	2.57	2.62	2.70	2.78	2.72	2.77	2.85	2.94	2.85	2.91	2.99	3.09	2.96	3.02	3.11	3.21	3.05	3.12	3.22	3.32
	Amps	8.4	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.9	10.1	10.4	10.8	10.5	10.8	11.1	11.5	11.2	11.4	11.8	12.2	11.8	12.1	12.5	13.0
	Hi PR	241	260	263	269	273	293	298	304	310	334	338	346	354	380	386	394	382	411	416	426	453	487	493	504
Lo PR	120	124	135	144	123	127	139	148	127	131	144	153	131	135	147	157	133	138	150	160	137	141	154	164	
MBh	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.5	37.9	31.7	32.4	34.6	37.0	30.1	30.8	32.9	35.1	27.9	28.5	30.4	32.5	
S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.69	0.52	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75	0.56	
ΔT	23	22	19	15	24	23	20	16	24	23	20	16	24	23	20	16	23	22	19	16	22	21	18	15	
kW	2.38	2.43	2.50	2.57	2.55	2.60	2.68	2.76	2.70	2.75	2.83	2.92	2.83	2.88	2.97	3.06	2.94	3.00	3.09	3.19	3.03	3.09	3.19	3.29	
Amps	8.4	8.6	8.8	9.1	9.0	9.2	9.5	9.9	9.8	10.0	10.3	10.7	10.4	10.7	11.0	11.4	11.1	11.3	11.7	12.1	11.7	12.0	12.4	12.8	
Hi PR	239	257	261	266	270	291	295	301	307	330	335	343	350	376	382	390	378	406	412	421	448	482	489	499	
Lo PR	119	122	133	142	122	126	137	146	126	130	142	151	130	134	146	155	132	136	149	158	135	140	152	162	
MBh	31.4	32.1	34.3	36.7	30.7	31.4	33.5	35.8	30.0	30.6	32.7	35.0	29.3	29.9	31.9	34.1	27.8	28.4	30.3	32.4	25.7	26.3	28.1	30.0	
S/T	0.82	0.77	0.63	0.47	0.85	0.80	0.65	0.49	0.87	0.82	0.67	0.50	0.90	0.85	0.69	0.51	0.94	0.88	0.71	0.53	0.94	0.89	0.72	0.54	
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15	
kW	2.37	2.41	2.48	2.55	2.53	2.58	2.66	2.74	2.68	2.73	2.81	2.90	2.80	2.86	2.95	3.04	2.91	2.97	3.06	3.16	3.01	3.07	3.16	3.27	
Amps	8.3	8.5	8.7	9.1	8.9	9.1	9.4	9.8	9.7	9.9	10.2	10.6	10.3	10.6	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.7	
Hi PR	237	254	258	264	268	288	292	298	304	327	332	339	347	373	378	386	374	402	408	417	444	477	484	494	
Lo PR	117	121	132	141	121	125	136	145	125	129	141	150	128	132	144	154	131	135	147	157	134	138	151	161	

85	MBh	35.7	36.4	38.1	40.7	34.9	35.6	37.2	39.7	34.0	34.7	36.3	38.8	33.2	33.9	35.5	37.8	31.6	32.2	33.7	35.9	29.2	29.8	31.2	33.3
	S/T	0.94	0.90	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.94	0.76
	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	23	24	22	19	22	23	22	19	21	21	21	18
	kW	2.40	2.45	2.52	2.59	2.57	2.62	2.70	2.78	2.72	2.77	2.85	2.94	2.85	2.91	2.99	3.09	2.96	3.02	3.11	3.21	3.05	3.12	3.22	3.32
	Amps	8.4	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.9	10.1	10.4	10.8	10.5	10.8	11.1	11.5	11.2	11.4	11.8	12.2	11.8	12.1	12.5	13.0
	Hi PR	241	260	263	269	273	293	298	304	310	334	338	346	354	380	386	394	382	411	416	426	453	487	493	504
Lo PR	120	124	135	144	123	127	139	148	127	131	144	153	131	135	147	157	133	138	150	160	137	141	154	164	
MBh	34.7	35.3	37.0	39.5	33.9	34.5	36.1	38.6	33.1	33.7	35.3	37.6	32.2	32.9	34.4	36.7	30.6	31.2	32.7	34.9	28.4	28.9	30.3	32.3	
S/T	0.89	0.86	0.78	0.63	0.93	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.89	0.72	
ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	23	20	24	25	23	20	23	23	22	19	
kW	2.38	2.43	2.50	2.57	2.55	2.60	2.68	2.76	2.70	2.75	2.83	2.92	2.83	2.88	2.97	3.06	2.94	3.00	3.09	3.19	3.03	3.09	3.19	3.29	
Amps	8.4	8.6	8.8	9.1	9.0	9.2	9.5	9.9	9.8	10.0	10.3	10.7	10.4	10.7	11.0	11.4	11.1	11.3	11.7	12.1	11.7	12.0	12.4	12.8	
Hi PR	239	257	261	266	270	291	295	301	307	330	335	343	350	376	382	390	378	406	412	421	448	482	489	499	
Lo PR	119	122	133	142	122	126	137	146	126	130	142	151	130	134	146	155	132	136	149	158	135	140	152	162	
MBh	32.0	32.6	34.2	36.4	31.3	31.9	33.4	35.6	30.5	31.1	32.6	34.7	29.8	30.3	31.8	33.9	28.3	28.8	30.2	32.2	26.2	26.7	28.0	29.8	
S/T	0.86	0.83	0.75	0.61	0.89	0.86	0.78	0.63	0.92	0.88	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	0.99	0.95	0.86	0.70	
ΔT	25	25	24	20	26	25	24	21	26	25	24	21	26	25	24	21	26	25	24	21	24	23	22	19	
kW	2.37	2.41	2.48	2.55	2.53	2.58	2.66	2.74	2.68	2.73	2.81	2.90	2.80	2.86	2.95	3.04	2.91	2.97	3.06	3.16	3.01	3.07	3.16	3.27	
Amps	8.3	8.5	8.7	9.1	8.9	9.1	9.4	9.8	9.7	9.9	10.2	10.6	10.3	10.6	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.7	
Hi PR	237	254	258	264	268	288	292	298	304	327	332	339	347	373	378	386	374	402	408	417	444	477	484	494	
Lo PR	117	121	132	141	121	125	136	145	125	129	141	150	128	132	144	154	131	135	147	157	134	138	151	161	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

# EXPANDED COOLING DATA — SSX140361BA / CA\*F3642\*6C\*

IDB		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1353	MBh	34.3	35.6	39.0	-	33.5	34.8	38.1	-	32.7	33.9	37.2	-	31.9	33.1	36.3	-	30.3	31.5	34.5	-	28.1	29.1	31.9	-
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
		ΔT	17	15	11	-	18	15	11	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-
		kW	2.30	2.35	2.41	-	2.46	2.51	2.59	-	2.61	2.66	2.74	-	2.73	2.79	2.88	-	2.84	2.90	2.99	-	2.93	3.00	3.09	-
		Amps	8.1	8.3	8.6	-	8.8	9.0	9.3	-	9.6	9.8	10.1	-	10.2	10.5	10.8	-	10.9	11.1	11.5	-	11.5	11.8	12.2	-
		Hi PR	227	245	258	-	255	275	290	-	290	312	330	-	331	356	376	-	372	400	423	-	411	442	467	-
	1200	Lo PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-
		MBh	33.3	34.6	37.9	-	32.6	33.7	37.0	-	31.8	32.9	36.1	-	31.0	32.1	35.2	-	29.5	30.5	33.5	-	27.3	28.3	31.0	-
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.81	0.68	0.47	-
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		kW	2.29	2.33	2.40	-	2.45	2.49	2.57	-	2.59	2.64	2.72	-	2.71	2.77	2.85	-	2.82	2.88	2.97	-	2.91	2.97	3.06	-
		Amps	8.1	8.3	8.5	-	8.7	8.9	9.2	-	9.5	9.7	10.0	-	10.1	10.4	10.7	-	10.8	11.0	11.4	-	11.4	11.7	12.1	-
1052	Hi PR	225	242	256	-	253	272	287	-	287	309	327	-	327	352	372	-	368	396	418	-	407	438	462	-	
	Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	148	-	132	141	154	-	
	MBh	30.8	31.9	34.9	-	30.1	31.1	34.1	-	29.3	30.4	33.3	-	28.6	29.7	32.5	-	27.2	28.2	30.9	-	25.2	26.1	28.6	-	
	S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-	
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	kW	2.24	2.28	2.34	-	2.39	2.44	2.51	-	2.53	2.58	2.66	-	2.65	2.70	2.79	-	2.75	2.81	2.90	-	2.84	2.90	2.99	-	
75	1353	Amps	7.9	8.0	8.3	-	8.5	8.7	9.0	-	9.2	9.4	9.7	-	9.8	10.1	10.4	-	10.5	10.7	11.1	-	11.1	11.3	11.7	-
		Hi PR	218	235	248	-	245	264	279	-	279	300	317	-	318	342	361	-	357	384	406	-	395	425	449	-
		Lo PR	103	109	119	-	108	115	126	-	113	120	131	-	118	126	137	-	124	132	144	-	128	136	149	-
		MBh	34.92	35.95	38.91	41.76	34.11	35.12	38.01	40.79	33.29	34.28	37.10	39.82	32.48	33.44	36.20	38.85	30.86	31.77	34.39	36.91	28.58	29.43	31.86	34.19
		S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.65	0.42
		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	19	17	14	10
75	1200	kW	2.32	2.36	2.43	2.51	2.48	2.53	2.61	2.69	2.63	2.68	2.76	2.85	2.76	2.81	2.90	2.99	2.86	2.92	3.01	3.11	2.96	3.02	3.11	3.21
		Amps	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.7	9.6	9.9	10.2	10.6	10.3	10.5	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.8
		Hi PR	230	247	261	272	258	277	293	306	293	316	333	348	334	359	380	396	376	404	427	445	415	447	472	492
		Lo PR	108	115	125	133	114	121	132	141	118	126	138	147	124	132	145	154	130	139	151	161	135	144	157	167
		MBh	33.9	34.9	37.8	40.5	33.1	34.1	36.9	39.6	32.3	33.3	36.0	38.7	31.5	32.5	35.1	37.7	30.0	30.8	33.4	35.8	27.8	28.6	30.9	33.2
		S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.83	0.62	0.40
75	1052	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10
		kW	2.30	2.35	2.42	2.49	2.46	2.51	2.59	2.67	2.61	2.66	2.74	2.83	2.73	2.79	2.88	2.97	2.84	2.90	2.99	3.08	2.93	3.00	3.09	3.19
		Amps	8.1	8.3	8.6	8.9	8.8	9.0	9.3	9.6	9.6	9.8	10.1	10.5	10.2	10.5	10.8	11.2	10.9	11.1	11.5	11.9	11.5	11.8	12.2	12.6
		Hi PR	228	245	259	270	255	275	290	303	290	312	330	344	331	356	376	392	372	400	423	441	411	442	467	487
		Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165
		MBh	31.3	32.2	34.9	37.4	30.6	31.5	34.1	36.6	29.8	30.7	33.2	35.7	29.1	30.0	32.4	34.8	27.7	28.5	30.8	33.1	25.6	26.4	28.5	30.6
75	1052	S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.89	0.80	0.60	0.39
		ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
		kW	2.25	2.30	2.36	2.43	2.41	2.46	2.53	2.61	2.55	2.60	2.68	2.76	2.67	2.73	2.81	2.90	2.78	2.83	2.92	3.01	2.86	2.92	3.02	3.11
		Amps	7.9	8.1	8.4	8.7	8.6	8.8	9.1	9.4	9.3	9.5	9.8	10.2	9.9	10.2	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.5	11.8	12.3
		Hi PR	221	237	251	262	248	266	281	293	282	303	320	334	321	345	365	380	361	388	410	428	399	429	453	473
		Lo PR	104	110	120	128	109	116	127	135	114	121	132	141	120	127	139	148	125	133	145	155	130	138	150	160

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.  
Shaded area reflects ACCA (ITVA) conditions  
kW = Total system power  
Amps = outdoor unit amps (comp. + fan)

# EXPANDED COOLING DATA — SSX140361BA / CA\*F3642\*6C\* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	35.54	36.31	38.80	41.47	34.71	35.47	37.90	40.51	33.89	34.63	36.99	39.55	33.06	33.78	36.09	38.58	31.41	32.09	34.29	36.65	29.09	29.73	31.76	33.95
	S/T	0.92	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.81	0.61
	ΔT	22	21	19	15	23	22	19	15	22	22	19	15	22	22	19	15	21	20	19	15	20	20	17	14
	kW	2.34	2.38	2.45	2.52	2.50	2.55	2.63	2.71	2.65	2.70	2.78	2.87	2.78	2.83	2.92	3.01	2.89	2.95	3.04	3.13	2.98	3.04	3.14	3.24
	Amps	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.8	9.7	10.0	10.3	10.7	10.4	10.6	11.0	11.4	11.1	11.3	11.7	12.2	11.7	12.0	12.4	12.9
	Hi PR	232	250	264	275	260	280	296	309	296	319	337	351	337	363	383	400	380	408	431	450	419	451	477	497
	Lo PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	169
	MBh	34.5	35.3	37.7	40.3	33.7	34.4	36.8	39.3	32.9	33.6	35.9	38.4	32.1	32.8	35.0	37.5	30.5	31.2	33.3	35.6	28.2	28.9	30.8	33.0
	S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58
	ΔT	23	22	19	16	24	23	20	16	24	23	20	16	24	23	20	16	23	22	20	16	22	21	18	15
	kW	2.32	2.36	2.43	2.51	2.48	2.53	2.61	2.69	2.63	2.68	2.76	2.85	2.76	2.81	2.90	2.99	2.86	2.92	3.01	3.11	2.96	3.02	3.11	3.21
	Amps	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.7	9.6	9.9	10.2	10.6	10.3	10.6	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.8
Hi PR	230	247	261	272	258	278	293	306	293	316	333	348	334	359	380	396	376	404	427	445	415	447	472	492	
Lo PR	108	115	125	133	114	121	132	141	118	126	138	147	124	132	145	154	130	139	151	161	135	144	157	167	
MBh	31.8	32.5	34.8	37.2	31.1	31.8	34.0	36.3	30.4	31.0	33.1	35.4	29.6	30.3	32.3	34.6	28.1	28.8	30.7	32.8	26.1	26.6	28.5	30.4	
S/T	0.85	0.80	0.65	0.48	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.91	0.74	0.56	
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15	
kW	2.27	2.31	2.38	2.45	2.43	2.48	2.55	2.63	2.57	2.62	2.70	2.78	2.69	2.75	2.83	2.92	2.80	2.85	2.94	3.04	2.89	2.95	3.04	3.14	
Amps	8.0	8.2	8.5	8.8	8.6	8.8	9.1	9.5	9.4	9.6	9.9	10.3	10.0	10.3	10.6	11.0	10.7	10.9	11.3	11.7	11.3	11.6	11.9	12.4	
Hi PR	223	240	253	264	250	269	284	296	284	306	323	337	324	349	368	384	365	392	414	432	403	433	458	477	
Lo PR	105	111	122	129	111	118	128	137	115	122	133	142	121	128	140	149	127	135	147	157	131	139	152	162	
85	MBh	36.16	36.86	38.60	41.18	35.32	36.00	37.71	40.23	34.48	35.14	36.81	39.27	33.64	34.29	35.91	38.31	31.95	32.57	34.11	36.40	29.60	30.17	31.60	33.71
	S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79
	ΔT	24	23	22	19	24	24	22	19	23	24	22	19	23	23	23	20	22	22	22	19	20	21	21	18
	kW	2.35	2.40	2.47	2.54	2.52	2.57	2.65	2.73	2.67	2.72	2.81	2.89	2.80	2.86	2.94	3.04	2.91	2.97	3.06	3.16	3.00	3.07	3.16	3.27
	Amps	8.4	8.6	8.8	9.2	9.0	9.3	9.6	9.9	9.8	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.2	11.4	11.8	12.3	11.8	12.1	12.5	13.0
	Hi PR	234	252	266	278	263	283	299	312	299	322	340	355	341	367	387	404	383	413	436	454	424	456	481	502
	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170
	MBh	35.1	35.8	37.5	40.0	34.3	35.0	36.6	39.1	33.5	34.1	35.7	38.1	32.7	33.3	34.9	37.2	31.0	31.6	33.1	35.3	28.7	29.3	30.7	32.7
	S/T	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75
	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	24	20	24	24	23	20	22	22	22	19
	kW	2.34	2.38	2.45	2.52	2.50	2.55	2.63	2.71	2.65	2.70	2.78	2.87	2.78	2.83	2.92	3.01	2.89	2.95	3.04	3.13	2.98	3.04	3.14	3.24
	Amps	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.8	9.7	10.0	10.3	10.7	10.4	10.6	11.0	11.4	11.1	11.3	11.7	12.2	11.7	12.0	12.4	12.9
Hi PR	232	250	264	275	260	280	296	309	296	319	337	351	337	363	383	400	380	408	431	450	419	451	477	497	
Lo PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	169	
MBh	32.4	33.0	34.6	36.9	31.6	32.3	33.8	36.0	30.9	31.5	33.0	35.2	30.1	30.7	32.2	34.3	28.6	29.2	30.6	32.6	26.5	27.0	28.3	30.2	
S/T	0.89	0.86	0.78	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72	
ΔT	25	25	23	20	26	25	24	21	26	25	24	21	26	25	24	21	25	25	24	20	23	23	22	19	
kW	2.29	2.33	2.40	2.47	2.45	2.49	2.57	2.65	2.59	2.64	2.72	2.80	2.71	2.77	2.85	2.94	2.82	2.88	2.97	3.06	2.91	2.97	3.06	3.16	
Amps	8.1	8.3	8.5	8.8	8.7	8.9	9.2	9.6	9.5	9.7	10.0	10.4	10.1	10.4	10.7	11.1	10.8	11.0	11.4	11.8	11.4	11.7	12.1	12.5	
Hi PR	225	242	256	267	253	272	287	299	287	309	327	341	327	352	372	388	368	396	418	436	407	438	462	482	
Lo PR	106	112	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	148	158	132	141	154	164	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. +fan)

# EXPANDED COOLING DATA — SSX140421CA / CA\*F4860\*6B\*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1225	MBh	35.1	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.0	32.2	35.2	-	28.8	29.8	32.7	-	
		S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	1450	kW	2.06	2.11	2.18	-	2.23	2.29	2.37	-	2.39	2.45	2.53	-	2.52	2.59	2.68	-	2.64	2.70	2.80	-	2.74	2.81	2.91	-	
		Amps	8.8	9.0	9.3	-	9.5	9.7	10.0	-	10.3	10.5	10.9	-	11.0	11.3	11.6	-	11.7	12.0	12.4	-	12.4	12.7	13.1	-	
		Hi PR	224	242	255	-	252	271	286	-	286	308	326	-	326	351	371	-	367	395	417	-	406	436	461	-	
	1575	Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-	
		MBh	38.1	39.4	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	35.4	36.7	40.2	-	33.6	34.9	38.2	-	31.2	32.3	35.4	-	
		S/T	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.45	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-	
	75	1225	ΔT	17	15	11	-	18	15	11	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-
			kW	2.11	2.16	2.24	-	2.29	2.35	2.43	-	2.45	2.51	2.60	-	2.60	2.66	2.75	-	2.71	2.78	2.88	-	2.82	2.89	2.99	-
			Amps	9.0	9.2	9.5	-	9.7	10.0	10.3	-	10.6	10.8	11.2	-	11.3	11.6	12.0	-	12.0	12.3	12.7	-	12.8	13.1	13.5	-
1450		Hi PR	231	249	263	-	260	279	295	-	295	318	336	-	336	362	382	-	378	407	430	-	418	450	475	-	
		Lo PR	111	118	129	-	117	125	136	-	122	129	141	-	128	136	148	-	134	143	156	-	139	147	161	-	
		MBh	38.4	39.8	43.6	-	37.5	38.9	42.6	-	36.6	38.0	41.6	-	35.8	37.1	40.6	-	34.0	35.2	38.6	-	31.5	32.6	35.7	-	
1575		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.49	-	
		ΔT	16	14	11	-	17	14	11	-	17	14	11	-	17	14	11	-	16	14	11	-	15	13	10	-	
		kW	2.12	2.17	2.25	-	2.30	2.36	2.44	-	2.46	2.52	2.61	-	2.60	2.67	2.76	-	2.72	2.79	2.89	-	2.83	2.89	3.00	-	
75		1225	Amps	9.0	9.2	9.6	-	9.8	10.0	10.3	-	10.6	10.9	11.2	-	11.3	11.6	12.0	-	12.1	12.4	12.8	-	12.8	13.1	13.6	-
			Hi PR	232	250	264	-	260	280	296	-	296	319	337	-	337	363	383	-	380	408	431	-	419	451	476	-
			Lo PR	111	118	129	-	117	125	136	-	122	130	142	-	128	136	149	-	134	143	156	-	139	148	161	-
	1450	MBh	35.7	36.8	39.8	42.7	34.9	35.9	38.9	41.7	34.1	35.1	38.0	40.7	33.2	34.2	37.0	39.7	31.6	32.5	35.2	37.8	29.2	30.1	32.6	35.0	
		S/T	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
		ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	20	16	11	20	18	15	10	
	1575	kW	2.08	2.13	2.20	2.28	2.25	2.31	2.39	2.47	2.41	2.47	2.56	2.65	2.55	2.61	2.70	2.80	2.67	2.73	2.83	2.93	2.77	2.83	2.94	3.04	
		Amps	8.8	9.1	9.4	9.7	9.6	9.8	10.1	10.5	10.4	10.6	11.0	11.4	11.1	11.4	11.8	12.2	11.8	12.1	12.5	13.0	12.5	12.8	13.3	13.8	
		Hi PR	227	244	258	269	254	274	289	302	289	311	329	343	330	355	375	391	371	399	421	439	410	441	466	486	
	75	1225	Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	145	155	131	140	152	162	136	144	158	168
			MBh	38.7	39.8	43.1	46.3	37.8	38.9	42.1	45.2	36.9	38.0	41.1	44.1	36.0	37.1	40.1	43.1	34.2	35.2	38.1	40.9	31.7	32.6	35.3	37.9
			S/T	0.81	0.73	0.55	0.35	0.84	0.76	0.57	0.37	0.87	0.77	0.59	0.38	0.89	0.80	0.60	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41
1450		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	19	17	14	10	
		kW	2.13	2.18	2.26	2.34	2.32	2.37	2.45	2.54	2.48	2.54	2.63	2.72	2.62	2.68	2.78	2.88	2.74	2.81	2.91	3.01	2.84	2.91	3.02	3.13	
		Amps	9.1	9.3	9.6	10.0	9.8	10.1	10.4	10.8	10.7	10.9	11.3	11.7	11.4	11.7	12.1	12.5	12.2	12.5	12.9	13.4	12.9	13.2	13.6	14.2	
1575		Hi PR	234	252	266	277	262	282	298	311	298	321	339	354	340	366	386	403	382	411	434	453	422	454	480	501	
		Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173	
		MBh	39.1	40.2	43.6	46.8	38.2	39.3	42.5	45.7	37.3	38.4	41.5	44.6	36.4	37.4	40.5	43.5	34.5	35.6	38.5	41.3	32.0	32.9	35.7	38.3	
1575		S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.95	0.85	0.64	0.41	0.95	0.85	0.65	0.42	
		ΔT	19	17	14	10	19	18	14	10	19	18	14	10	19	18	15	10	19	18	14	10	18	16	13	9	
		kW	2.14	2.19	2.27	2.35	2.32	2.38	2.46	2.55	2.48	2.54	2.63	2.73	2.63	2.69	2.79	2.89	2.75	2.81	2.92	3.02	2.85	2.92	3.03	3.14	
1575	Amps	9.1	9.3	9.6	10.0	9.9	10.1	10.4	10.8	10.7	11.0	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.2	13.7	14.2		
	Hi PR	234	252	266	278	263	283	299	312	299	322	340	355	341	367	387	404	383	413	436	454	424	456	481	502		
	Lo PR	112	119	130	139	119	126	138	147	123	131	143	153	130	138	150	160	136	144	158	168	140	149	163	174		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (ITVA) conditions

kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSX140421CA / CA\*F4860\*6B\* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1225	MBh	36.4	37.1	39.7	42.4	35.5	36.3	38.8	41.4	34.7	35.4	37.8	40.5	33.8	34.6	36.9	39.5	32.1	32.8	35.1	37.5	29.8	30.4	32.5	34.7	
		S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	22	19	15	22	21	18	15	
	1450	kW	2.10	2.14	2.22	2.30	2.27	2.33	2.41	2.50	2.43	2.49	2.58	2.67	2.57	2.63	2.73	2.83	2.69	2.75	2.85	2.96	2.79	2.86	2.96	3.07	
		Amps	8.9	9.1	9.4	9.8	9.6	9.9	10.2	10.6	10.5	10.7	11.1	11.5	11.2	11.5	11.9	12.3	11.9	12.2	12.6	13.1	12.6	12.9	13.4	13.9	
		Hi PR	229	246	260	271	257	277	292	305	292	315	332	346	333	358	378	395	375	403	426	444	414	445	470	490	
	1575	Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	
		MBh	39.4	40.2	43.0	46.0	38.5	39.3	42.0	44.9	37.6	38.4	41.0	43.8	36.6	37.4	40.0	42.8	34.8	35.6	38.0	40.6	32.2	32.9	35.2	37.6	
		S/T	0.89	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	0.96	0.78	0.59	
	85	1225	ΔT	22	21	19	15	23	22	19	15	23	22	19	15	23	22	19	15	22	22	19	15	20	20	17	14
			kW	2.15	2.20	2.28	2.36	2.34	2.39	2.48	2.57	2.50	2.56	2.65	2.75	2.64	2.71	2.80	2.91	2.77	2.83	2.93	3.04	2.87	2.94	3.05	3.16
			Amps	9.2	9.4	9.7	10.1	9.9	10.2	10.5	10.9	10.8	11.0	11.4	11.8	11.5	11.8	12.2	12.7	12.3	12.6	13.0	13.5	13.0	13.3	13.8	14.3
1450		Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	485	506	
		Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	152	161	137	145	159	169	141	150	164	175	
		MBh	39.8	40.7	43.4	46.4	38.9	39.7	42.4	45.3	37.9	38.8	41.4	44.3	37.0	37.8	40.4	43.2	35.2	35.9	38.4	41.0	32.6	33.3	35.6	38.0	
1575		S/T	0.91	0.85	0.70	0.52	0.94	0.89	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.60	
		ΔT	21	20	18	14	21	21	18	14	21	21	18	14	22	21	18	14	22	21	18	14	19	19	17	13	
		kW	2.16	2.21	2.29	2.37	2.34	2.40	2.48	2.57	2.51	2.57	2.66	2.75	2.65	2.71	2.81	2.91	2.77	2.84	2.94	3.05	2.88	2.95	3.06	3.17	
85		1225	Amps	9.2	9.4	9.7	10.1	9.9	10.2	10.5	10.9	10.8	11.1	11.4	11.9	11.6	11.8	12.2	12.7	12.3	12.6	13.0	13.5	13.0	13.4	13.8	14.3
			Hi PR	237	255	269	281	266	286	302	315	302	325	343	358	344	370	391	408	387	417	440	459	428	460	486	507
			Lo PR	113	121	132	140	120	127	139	148	125	133	145	154	131	139	152	162	137	146	159	170	142	151	165	175
85	1450	MBh	37.0	37.7	39.5	42.1	36.1	36.8	38.6	41.2	35.3	36.0	37.7	40.2	34.4	35.1	36.7	39.2	32.7	33.3	34.9	37.2	30.3	30.9	32.3	34.5	
		S/T	0.90	0.87	0.79	0.64	0.94	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.90	0.73	
		ΔT	25	25	23	20	25	25	24	20	25	25	24	20	26	25	24	21	25	25	23	20	23	23	22	19	
	1575	kW	2.11	2.16	2.24	2.32	2.29	2.35	2.43	2.52	2.45	2.51	2.60	2.70	2.59	2.66	2.75	2.85	2.71	2.78	2.88	2.99	2.82	2.89	2.99	3.10	
		Amps	9.0	9.2	9.5	9.9	9.7	10.0	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.6	12.0	12.4	12.0	12.3	12.7	13.2	12.8	13.1	13.5	14.0	
		Hi PR	231	249	263	274	260	279	295	308	295	318	335	350	336	362	382	399	378	407	430	448	418	450	475	495	
	85	1450	Lo PR	111	118	129	137	117	125	136	145	122	129	141	150	128	136	148	158	134	142	156	166	139	147	161	171
			MBh	40.1	40.9	42.8	45.6	39.1	39.9	41.8	44.6	38.2	39.0	40.8	43.5	37.3	38.0	39.8	42.5	35.4	36.1	37.8	40.3	32.8	33.4	35.0	37.4
			S/T	0.94	0.90	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.94	0.76
		1575	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	24	24	23	20	22	23	22	19	21	21	21	18
			kW	2.17	2.22	2.30	2.38	2.36	2.41	2.50	2.59	2.52	2.58	2.67	2.77	2.67	2.73	2.83	2.93	2.79	2.86	2.96	3.07	2.90	2.97	3.07	3.19
			Amps	9.3	9.5	9.8	10.2	10.0	10.3	10.6	11.0	10.9	11.1	11.5	11.9	11.6	11.9	12.3	12.8	12.4	12.7	13.1	13.6	13.1	13.4	13.9	14.4
85		1575	Hi PR	238	257	271	283	268	288	304	317	304	328	346	361	347	373	394	411	390	420	443	462	431	464	490	511
			Lo PR	114	122	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	177
			MBh	40.5	41.3	43.2	46.1	39.5	40.3	42.2	45.0	38.6	39.3	41.2	44.0	37.7	38.4	40.2	42.9	35.8	36.5	38.2	40.7	33.1	33.8	35.4	37.7
85		1575	S/T	0.96	0.92	0.83	0.67	0.99	0.96	0.86	0.70	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77
			ΔT	23	22	21	18	23	22	21	18	23	22	21	18	22	22	21	19	21	21	21	18	19	20	20	17
			kW	2.18	2.23	2.31	2.39	2.36	2.42	2.51	2.60	2.53	2.59	2.68	2.78	2.67	2.74	2.84	2.94	2.80	2.87	2.97	3.08	2.90	2.98	3.08	3.20
85	1575	Amps	9.3	9.5	9.8	10.2	10.0	10.3	10.6	11.0	10.9	11.2	11.5	12.0	11.7	11.9	12.3	12.8	12.4	12.7	13.1	13.7	13.2	13.5	13.9	14.5	
		Hi PR	239	257	272	284	268	289	305	318	305	328	347	362	348	374	395	412	391	421	444	464	432	465	491	512	
		Lo PR	115	122	133	142	121	129	141	150	126	134	146	156	132	141	153	163	138	147	161	171	143	152	166	177	

Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — SSX140481B\* / CA\*F4860\*6D\* / 0.078 ORIFICE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-
	S/T	0.76	0.63	0.44	-	0.78	0.66	0.45	-	0.80	0.67	0.47	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
	kW	3.04	3.10	3.19	-	3.25	3.32	3.42	-	3.44	3.51	3.62	-	3.61	3.69	3.80	-	3.75	3.83	3.95	-	3.88	3.96	4.08	-
	Amps	10.8	11.1	11.5	-	11.7	12.1	12.5	-	12.9	13.2	13.7	-	13.8	14.2	14.7	-	14.8	15.2	15.7	-	15.7	16.2	16.8	-
	Hi PR	223	240	253	-	250	269	284	-	284	306	323	-	324	349	368	-	365	392	414	-	403	433	458	-
	Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-
	MBh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-
	S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-
kW	3.01	3.07	3.16	-	3.23	3.29	3.39	-	3.42	3.49	3.59	-	3.58	3.66	3.77	-	3.72	3.80	3.92	-	3.85	3.93	4.05	-	
Amps	10.7	10.9	11.3	-	11.6	11.9	12.4	-	12.7	13.1	13.5	-	13.7	14.1	14.6	-	14.6	15.0	15.6	-	15.6	16.0	16.6	-	
Hi PR	221	238	251	-	248	267	281	-	282	303	320	-	321	345	365	-	361	388	410	-	399	429	453	-	
Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-	
MBh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-	
S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	
ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	
kW	2.95	3.01	3.09	-	3.16	3.22	3.31	-	3.34	3.41	3.51	-	3.50	3.57	3.68	-	3.64	3.71	3.83	-	3.76	3.83	3.95	-	
Amps	10.3	10.6	11.0	-	11.3	11.6	12.0	-	12.4	12.7	13.1	-	13.3	13.6	14.1	-	14.2	14.6	15.1	-	15.1	15.5	16.1	-	
Hi PR	214	230	243	-	240	259	273	-	273	294	310	-	311	335	354	-	350	377	398	-	387	416	440	-	
Lo PR	102	109	119	-	108	115	125	-	112	119	130	-	118	125	137	-	124	131	143	-	128	136	148	-	
75	MBh	45.8	47.2	51.1	54.8	44.8	46.1	49.9	53.6	43.7	45.0	48.7	52.3	42.6	43.9	47.5	51.0	40.5	41.7	45.1	48.5	37.5	38.6	41.8	44.9
	S/T	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.91	0.82	0.62	0.40	0.94	0.84	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.88	0.67	0.43
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	15	10
	kW	3.06	3.12	3.21	3.31	3.28	3.34	3.44	3.55	3.47	3.54	3.65	3.76	3.64	3.71	3.83	3.95	3.78	3.86	3.98	4.11	3.91	3.99	4.12	4.25
	Amps	10.9	11.2	11.6	12.1	11.9	12.2	12.6	13.1	13.0	13.3	13.8	14.4	14.0	14.3	14.9	15.5	14.9	15.3	15.9	16.6	15.9	16.3	16.9	17.6
	Hi PR	225	242	256	267	253	272	287	300	287	309	327	341	327	352	372	388	368	396	418	436	407	438	462	482
	Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166
	MBh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6
	S/T	0.82	0.73	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.93	0.84	0.63	0.41	0.94	0.84	0.64	0.41
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
kW	3.04	3.10	3.19	3.28	3.25	3.32	3.42	3.52	3.44	3.51	3.62	3.73	3.61	3.69	3.80	3.92	3.75	3.83	3.95	4.08	3.88	3.96	4.08	4.21	
Amps	10.8	11.1	11.5	11.9	11.7	12.1	12.5	13.0	12.9	13.2	13.7	14.2	13.8	14.2	14.7	15.3	14.8	15.2	15.7	16.4	15.8	16.2	16.8	17.4	
Hi PR	223	240	253	264	250	269	284	297	285	306	323	337	324	349	368	384	365	392	414	432	403	434	458	477	
Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165	
MBh	41.1	42.3	45.8	49.1	40.1	41.3	44.7	48.0	39.2	40.3	43.7	46.8	38.2	39.3	42.6	45.7	36.3	37.4	40.5	43.4	33.6	34.6	37.5	40.2	
S/T	0.79	0.71	0.54	0.34	0.82	0.73	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.81	0.62	0.40	
ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11	
kW	2.97	3.03	3.12	3.21	3.18	3.24	3.34	3.44	3.36	3.43	3.54	3.65	3.53	3.60	3.71	3.83	3.67	3.74	3.86	3.98	3.79	3.86	3.99	4.11	
Amps	10.5	10.7	11.1	11.6	11.4	11.7	12.1	12.6	12.5	12.8	13.3	13.8	13.4	13.8	14.3	14.9	14.4	14.7	15.3	15.9	15.3	15.7	16.3	16.9	
Hi PR	216	233	246	256	243	261	276	288	276	297	314	327	314	338	357	373	354	381	402	419	391	421	444	463	
Lo PR	103	110	120	128	109	116	127	135	113	121	132	140	119	127	138	147	125	133	145	154	129	137	150	160	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (ITVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. +fan)



# EXPANDED COOLING DATA — SSX140481B\* / CA\*F4860\*6D\* / 0.078 ORIFICE (CONT.)

IDB	OUTDOOR AMBIENT TEMPERATURE										ENTERING INDOOR WET BULB TEMPERATURE										115°F									
	65°F					75°F					85°F					95°F					105°F					115°F				
	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
80	AIRFLOW	MBh	46.7	47.7	50.9	54.4	45.6	46.6	49.7	53.2	44.5	45.5	48.6	51.9	43.4	44.3	47.4	50.6	41.2	42.1	45.0	48.1	38.2	39.0	41.7	44.6				
		S/T	0.94	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62				
	ΔT	23	22	19	15	24	22	20	16	23	22	20	16	23	23	20	16	23	22	19	15	20	21	18	14					
	kW	1750	3.08	3.14	3.23	3.33	3.30	3.37	3.47	3.58	3.50	3.57	3.68	3.79	3.67	3.74	3.86	3.98	3.81	3.89	4.02	4.14	3.94	4.02	4.15	4.28				
		Amps	11.0	11.3	11.7	12.2	12.0	12.3	12.7	13.3	13.1	13.5	14.0	14.5	14.1	14.5	15.0	15.6	15.1	15.5	16.1	16.7	16.1	16.5	17.1	17.8				
	HI PR	1750	227	245	258	270	255	275	290	303	290	312	330	344	331	356	376	392	372	400	423	441	411	442	467	487				
		Lo PR	109	116	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168				
	MBh	1550	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3				
		S/T	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.97	0.79	0.59				
	ΔT	24	23	20	16	24	23	20	16	25	23	20	16	25	24	21	17	25	24	21	17	25	24	21	17	15				
kW	1550	3.06	3.12	3.21	3.31	3.28	3.34	3.44	3.55	3.47	3.54	3.65	3.76	3.64	3.72	3.83	3.95	3.78	3.86	3.98	4.11	3.91	3.99	4.12	4.25					
	Amps	10.9	11.2	11.6	12.1	11.9	12.2	12.6	13.1	13.0	13.3	13.8	14.4	14.0	14.3	14.9	15.5	14.9	15.3	15.9	16.6	15.9	16.3	16.9	17.6					
HI PR	1550	225	242	256	267	253	272	287	300	287	309	327	341	327	352	372	388	368	396	419	436	407	438	462	482					
	Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166					
MBh	1350	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9					
	S/T	0.87	0.81	0.66	0.50	0.90	0.84	0.69	0.51	0.92	0.87	0.70	0.53	0.95	0.89	0.73	0.54	0.99	0.93	0.75	0.56	1.00	0.93	0.76	0.57					
ΔT	25	24	21	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	15					
kW	1350	2.99	3.05	3.14	3.23	3.20	3.27	3.36	3.47	3.39	3.46	3.56	3.67	3.55	3.63	3.74	3.86	3.69	3.77	3.89	4.01	3.82	3.90	4.02	4.15					
	Amps	10.6	10.8	11.2	11.7	11.5	11.8	12.2	12.7	12.6	12.9	13.4	14.0	13.6	13.9	14.4	15.0	14.5	14.9	15.4	16.1	15.4	15.8	16.4	17.1					
HI PR	1350	218	235	248	259	245	264	279	291	279	300	317	330	318	342	361	376	357	384	406	423	395	425	449	468					
	Lo PR	104	111	121	129	110	117	128	136	114	122	133	142	120	128	140	149	126	134	146	156	130	139	151	161					
85	AIRFLOW	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3				
		S/T	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80				
	ΔT	25	24	23	20	24	25	23	20	24	24	23	20	23	24	23	20	22	22	23	20	20	21	22	19					
	kW	1750	3.10	3.17	3.26	3.36	3.33	3.39	3.50	3.60	3.52	3.60	3.71	3.82	3.70	3.77	3.89	4.01	3.84	3.92	4.05	4.18	3.97	4.06	4.18	4.32				
		Amps	11.1	11.4	11.8	12.3	12.1	12.4	12.9	13.4	13.3	13.6	14.1	14.7	14.3	14.6	15.2	15.8	15.2	15.7	16.2	16.9	16.2	16.7	17.3	18.0				
	HI PR	1750	230	247	261	272	258	277	293	306	293	316	333	348	334	359	379	396	376	404	427	445	415	447	472	492				
		Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	126	135	147	156	133	141	154	164	137	146	159	170				
	MBh	1550	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0				
		S/T	0.94	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.77				
	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	25	26	24	21	25	24	25	24	21	22	23	20					
kW	1550	3.08	3.14	3.23	3.33	3.30	3.37	3.47	3.58	3.50	3.57	3.68	3.79	3.67	3.74	3.86	3.98	3.81	3.89	4.02	4.14	3.94	4.02	4.15	4.28					
	Amps	11.0	11.3	11.7	12.2	12.0	12.3	12.7	13.3	13.1	13.5	14.0	14.5	14.1	14.5	15.0	15.6	15.1	15.5	16.1	16.7	16.1	16.5	17.1	17.8					
HI PR	1550	227	245	258	270	255	275	290	303	290	312	330	344	331	356	376	392	372	400	423	441	411	442	467	487					
	Lo PR	109	116	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168					
MBh	1350	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7					
	S/T	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.67	0.97	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74					
ΔT	26	26	25	21	27	26	25	21	27	26	25	21	27	26	25	22	26	26	26	25	22	24	24	23	20					
kW	1350	3.01	3.07	3.16	3.26	3.23	3.29	3.39	3.49	3.42	3.49	3.59	3.70	3.58	3.66	3.77	3.89	3.72	3.80	3.92	4.04	3.85	3.93	4.05	4.18					
	Amps	10.7	10.9	11.3	11.8	11.6	11.9	12.4	12.9	12.7	13.1	13.5	14.1	13.7	14.1	14.6	15.2	14.6	15.0	15.6	16.2	15.6	16.0	16.6	17.3					
HI PR	1350	221	237	251	262	248	266	281	293	282	303	320	334	321	345	364	380	361	388	410	428	399	429	453	472					
	Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163					

Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.

85: Entering Indoor Wet Bulb Temperature  
 Shaded area reflects AHRI (TVA) conditions

EXPANDED COOLING DATA — SSX140601A\* / CA\*F4860D6A\* / .088 ORIFICE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	2025	MbH	54.9	56.9	62.3	-	53.6	55.6	60.9	-	52.3	54.2	59.4	-	51.0	52.9	58.0	-	48.5	50.3	55.1	-	44.9	46.6	51.0	-
		S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-	
	kW	4.04	4.13	4.25	-	4.35	4.44	4.58	-	4.61	4.71	4.86	-	4.85	4.95	5.11	-	5.05	5.16	5.33	-	5.22	5.34	5.51	-	
	Amps	14.5	14.8	15.3	-	15.6	16.0	16.6	-	17.0	17.4	18.0	-	18.2	18.7	19.3	-	21.3	21.8	22.6	-	22.5	23.1	23.8	-	
	Hi PR	249	268	272	-	274	294	298	-	320	344	349	-	365	392	398	-	411	441	448	-	474	510	517	-	
	Lo PR	117	120	132	-	120	124	135	-	124	128	140	-	128	132	144	-	130	134	147	-	133	138	150	-	
	MbH	53.3	55.2	60.5	-	52.0	53.9	59.1	-	50.8	52.7	57.7	-	49.6	51.4	56.3	-	47.1	48.8	53.5	-	43.6	45.2	49.5	-	
	S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-	
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	
1800	1800	kW	4.01	4.09	4.22	-	4.31	4.40	4.54	-	4.58	4.67	4.82	-	4.81	4.91	5.07	-	5.01	5.12	5.29	-	5.18	5.30	5.47	-
		Amps	14.3	14.7	15.2	-	15.5	15.9	16.4	-	16.9	17.3	17.9	-	18.1	18.5	19.1	-	21.1	21.6	22.4	-	22.3	22.8	23.6	-
	Hi PR	247	265	269	-	271	291	296	-	317	341	346	-	361	388	394	-	406	437	443	-	470	505	512	-	
	Lo PR	116	119	130	-	119	123	134	-	123	127	139	-	126	130	142	-	129	133	145	-	132	136	149	-	
	MbH	49.2	51.0	55.8	-	48.0	49.8	54.5	-	46.9	48.6	53.2	-	45.7	47.4	51.9	-	43.5	45.0	49.3	-	40.3	41.7	45.7	-	
	S/T	0.66	0.55	0.38	-	0.68	0.57	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.75	0.63	0.44	-	
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	12	-	18	15	12	-	
	kW	3.98	4.06	4.19	-	4.28	4.37	4.50	-	4.54	4.64	4.78	-	4.77	4.87	5.03	-	4.97	5.08	5.24	-	5.14	5.25	5.42	-	
	Amps	14.2	14.5	15.0	-	15.4	15.7	16.3	-	16.7	17.1	17.7	-	17.9	18.3	19.0	-	20.9	21.4	22.2	-	22.1	22.6	23.4	-	
	Hi PR	244	263	266	-	268	288	293	-	314	338	342	-	358	385	390	-	402	433	439	-	465	500	507	-	
Lo PR	114	118	129	-	118	122	133	-	122	126	137	-	125	129	141	-	128	132	144	-	131	135	147	-		

2025	2025	MbH	55.8	57.5	62.2	66.7	54.5	56.1	60.7	65.2	53.2	54.8	59.3	63.6	51.9	53.4	57.9	62.1	49.3	50.8	55.0	59.0	45.7	47.0	50.9	54.6
		S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.83	0.63	0.40	0.93	0.83	0.63	0.41
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	
	kW	4.04	4.13	4.25	4.39	4.35	4.44	4.58	4.72	4.61	4.71	4.86	5.02	4.85	4.95	5.11	5.28	5.05	5.16	5.33	5.51	5.22	5.34	5.51	5.70	
	Amps	14.5	14.8	15.3	15.9	15.6	16.0	16.6	17.2	17.0	17.4	18.0	18.7	18.2	18.7	19.3	20.1	21.3	21.8	22.6	23.5	22.5	23.1	23.8	24.8	
	Hi PR	249	268	272	278	274	294	298	305	320	344	349	357	365	392	398	407	411	441	448	458	474	510	517	529	
	Lo PR	117	120	132	140	120	124	135	144	124	128	140	149	128	132	144	153	130	134	147	156	133	138	150	160	
	MbH	54.2	55.8	60.4	64.8	52.9	54.5	59.0	63.3	51.7	53.2	57.6	61.8	50.4	51.9	56.2	60.3	47.9	49.3	53.4	57.3	44.4	45.7	49.4	53.0	
	S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.89	0.79	0.60	0.39	
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	19	15	10	
1800	1800	kW	4.01	4.09	4.22	4.35	4.31	4.40	4.54	4.69	4.58	4.67	4.82	4.98	4.81	4.91	5.07	5.24	5.01	5.12	5.29	5.46	5.18	5.30	5.47	5.65
		Amps	14.3	14.7	15.2	15.7	15.5	15.9	16.4	17.0	16.9	17.3	17.9	18.6	18.1	18.5	19.1	19.9	21.1	21.6	22.4	23.2	22.3	22.8	23.6	24.5
	Hi PR	247	265	269	275	271	291	296	302	317	341	346	354	361	388	394	403	406	437	443	453	470	505	512	523	
	Lo PR	116	119	130	139	119	123	134	143	123	127	139	148	126	130	142	152	129	133	145	155	132	136	149	158	
	MbH	50.0	51.5	55.7	59.8	48.8	50.3	54.4	58.4	47.7	49.1	53.1	57.0	46.5	47.9	51.8	55.6	44.2	45.5	49.3	52.9	40.9	42.1	45.6	49.0	
	S/T	0.75	0.67	0.51	0.32	0.77	0.69	0.52	0.34	0.79	0.71	0.54	0.35	0.82	0.73	0.55	0.36	0.85	0.76	0.58	0.37	0.86	0.77	0.58	0.37	
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	17	11	20	19	15	11	
	kW	3.98	4.06	4.19	4.32	4.28	4.37	4.50	4.65	4.54	4.64	4.78	4.94	4.77	4.87	5.03	5.20	4.97	5.08	5.24	5.41	5.14	5.25	5.42	5.60	
	Amps	14.2	14.5	15.0	15.6	15.4	15.7	16.3	16.9	16.7	17.1	17.7	18.4	17.9	18.3	19.0	19.7	20.9	21.4	22.2	23.0	22.1	22.6	23.4	24.3	
	Hi PR	244	263	266	272	268	288	293	299	314	338	342	350	358	385	390	399	402	433	439	448	465	500	507	518	
Lo PR	114	118	129	137	118	122	133	141	122	126	137	146	125	129	141	150	128	132	144	153	131	135	147	157		

High and low pressures are measured at the liquid and suction service valves. Shaded area reflects ACCA (TVA) conditions. kW = Total system power. Amps = outdoor unit amps (comp. + fan)

**EXPANDED COOLING DATA — SSX140601A\* / CA\*F4860D6A\* / .088 ORIFICE (CONT.)**

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F			75°F			85°F			95°F			105°F			115°F								
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
2025	MBh	56.8	58.0	62.0	66.3	55.5	56.7	60.6	64.7	54.2	55.3	59.1	63.2	52.8	54.0	57.7	61.7	50.2	51.3	54.8	58.6	46.5	47.5	50.8	54.3
	S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.53	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58
	ΔT	23	22	19	15	23	22	19	15	24	22	19	15	24	22	20	16	23	22	19	15	21	21	18	14
	kW	4.04	4.13	4.25	4.39	4.35	4.44	4.58	4.72	4.61	4.71	4.86	5.02	4.85	4.95	5.11	5.28	5.05	5.16	5.33	5.51	5.22	5.34	5.51	5.70
	Amps	14.5	14.8	15.3	15.9	15.6	16.0	16.6	17.2	17.0	17.4	18.0	18.7	18.2	18.7	19.3	20.1	21.3	21.8	22.6	23.5	22.5	23.1	23.8	24.8
	HI PR	249	268	272	278	274	294	298	305	320	344	349	357	365	392	398	407	411	441	448	458	474	510	517	529
	Lo PR	117	120	132	140	120	124	135	144	124	128	140	149	128	132	144	153	130	134	147	156	133	138	150	160
	MBh	55.1	56.3	60.2	64.4	53.9	55.0	58.8	62.9	52.6	53.7	57.4	61.4	51.3	52.4	56.0	59.9	48.7	49.8	53.2	56.9	45.1	46.1	49.3	52.7
	S/T	0.85	0.80	0.65	0.48	0.88	0.82	0.67	0.50	0.90	0.85	0.69	0.51	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.97	0.91	0.74	0.56
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	22	19	15
	kW	4.01	4.09	4.22	4.35	4.31	4.40	4.54	4.69	4.58	4.67	4.82	4.98	4.81	4.91	5.07	5.24	5.01	5.12	5.29	5.46	5.18	5.30	5.47	5.65
	Amps	14.3	14.7	15.2	15.7	15.5	15.9	16.4	17.0	16.9	17.3	17.9	18.6	18.1	18.5	19.1	19.9	21.1	21.6	22.4	23.2	22.3	22.8	23.6	24.5
HI PR	247	265	269	275	271	291	296	302	317	341	346	354	361	388	394	403	406	437	443	453	470	505	512	523	
Lo PR	116	119	130	139	119	123	134	143	123	127	139	148	126	130	142	152	129	133	145	155	132	136	149	158	
MBh	50.9	52.0	55.6	59.4	49.7	50.8	54.3	58.0	48.5	49.6	53.0	56.6	47.3	48.4	51.7	55.3	45.0	46.0	49.1	52.5	41.7	42.6	45.5	48.6	
S/T	0.82	0.77	0.62	0.47	0.85	0.80	0.65	0.48	0.87	0.82	0.66	0.50	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.94	0.88	0.72	0.54	
ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	24	23	20	16	23	22	19	15	
kW	3.98	4.06	4.19	4.32	4.28	4.37	4.50	4.65	4.54	4.64	4.78	4.94	4.77	4.87	5.03	5.20	4.97	5.08	5.24	5.41	5.14	5.25	5.42	5.60	
Amps	14.2	14.5	15.0	15.6	15.4	15.7	16.3	16.9	16.7	17.1	17.7	18.4	17.9	18.3	19.0	19.7	20.9	21.4	22.2	23.0	22.1	22.6	23.4	24.3	
HI PR	244	263	266	272	268	288	293	299	314	338	342	350	358	385	390	399	402	433	439	448	465	500	507	518	
Lo PR	114	118	129	137	118	122	133	141	122	126	137	146	125	129	141	150	128	132	144	153	131	135	147	157	

2025	MBh	57.8	58.9	61.7	65.8	56.4	57.5	60.3	64.3	55.1	56.2	58.8	62.8	53.8	54.8	57.4	61.2	51.1	52.1	54.5	58.2	47.3	48.2	50.5	53.9
	S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76
	ΔT	24	24	23	20	25	24	23	20	25	24	23	20	24	25	23	20	24	23	20	21	22	21	19	19
	kW	4.04	4.13	4.25	4.39	4.35	4.44	4.58	4.72	4.61	4.71	4.86	5.02	4.85	4.95	5.11	5.28	5.05	5.16	5.33	5.51	5.22	5.34	5.51	5.70
	Amps	14.5	14.8	15.3	15.9	15.6	16.0	16.6	17.2	17.0	17.4	18.0	18.7	18.2	18.7	19.3	20.1	21.3	21.8	22.6	23.5	22.5	23.1	23.8	24.8
	HI PR	249	268	272	278	274	294	298	305	320	344	349	357	365	392	398	407	411	441	448	458	474	510	517	529
	Lo PR	117	120	132	140	120	124	135	144	124	128	140	149	128	132	144	153	130	134	147	156	133	138	150	160
	MBh	56.1	57.2	59.9	63.9	54.8	55.9	58.5	62.4	53.5	54.5	57.1	60.9	52.2	53.2	55.7	59.4	49.6	50.5	52.9	56.5	45.9	46.8	49.0	52.3
	S/T	0.89	0.86	0.77	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72
	ΔT	25	25	24	21	26	25	24	21	26	25	24	21	26	26	24	21	25	25	24	21	23	24	22	19
	kW	4.01	4.09	4.22	4.35	4.31	4.40	4.54	4.69	4.58	4.67	4.82	4.98	4.81	4.91	5.07	5.24	5.01	5.12	5.29	5.46	5.18	5.30	5.47	5.65
	Amps	14.3	14.7	15.2	15.7	15.5	15.9	16.4	17.0	16.9	17.3	17.9	18.6	18.1	18.5	19.1	19.9	21.1	21.6	22.4	23.2	22.3	22.8	23.6	24.5
HI PR	247	265	269	275	271	291	296	302	317	341	346	354	361	388	394	403	406	437	443	453	470	505	512	523	
Lo PR	116	119	130	139	119	123	134	143	123	127	139	148	126	130	142	152	129	133	145	155	132	136	149	158	
MBh	51.8	52.8	55.3	59.0	50.6	51.6	54.0	57.6	49.4	50.3	52.7	56.2	48.2	49.1	51.4	54.9	45.8	46.7	48.9	52.1	42.4	43.2	45.3	48.3	
S/T	0.86	0.83	0.75	0.61	0.89	0.86	0.77	0.63	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.66	0.98	0.94	0.85	0.69	0.98	0.95	0.86	0.70	
ΔT	26	26	24	21	26	26	24	21	26	26	24	21	26	26	25	21	26	26	24	21	24	24	23	20	
kW	3.98	4.06	4.19	4.32	4.28	4.37	4.50	4.65	4.54	4.64	4.78	4.94	4.77	4.87	5.03	5.20	4.97	5.08	5.24	5.41	5.14	5.25	5.42	5.60	
Amps	14.2	14.5	15.0	15.6	15.4	15.7	16.3	16.9	16.7	17.1	17.7	18.4	17.9	18.3	19.0	19.7	20.9	21.4	22.2	23.0	22.1	22.6	23.4	24.3	
HI PR	244	263	266	272	268	288	293	299	314	338	342	350	358	385	390	399	402	433	439	448	465	500	507	518	
Lo PR	114	118	129	137	118	122	133	141	122	126	137	146	125	129	141	150	128	132	144	153	131	135	147	157	

kW = Total system power  
Amps = outdoor unit amps (comp. +fan)

Shaded area reflects AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0181B*	AEPF183016C*+TXV		18,000	13,500	15.00	12.50	3456795
	AR*F193116C*+TXV		18,000	13,500	14.00	12.00	4261910
	ASPF183016E*+TXV		18,000	13,500	15.00	12.50	4244350
	AVPTC183014A*		18,000	13,500	15.00	12.50	4431244
	AWUF31XX16A*		17,400	13,100	14.50	12.00	3629343
	AWUF32XX16A*		17,400	13,100	14.50	12.00	4399562
	CA*F1824*6D*	GME950403BXA*	17,000	12,800	14.00	12.00	4701040
	CA*F1824*6D*	G*VM960603BXA*	17,000	12,800	14.00	12.00	4655205
	CA*F1824*6D*	A*VM960603BXA*	17,000	12,800	14.00	12.00	4651989
	CA*F1824*6D*	G*VC950453BXA*	17,000	12,800	14.00	12.00	4588711
	CA*F1824*6D*	A*VC950453BXA*	17,000	12,800	14.00	12.00	4150285
	CA*F3131*6D*+EEP+TXV		18,000	13,500	14.00	12.00	4385560
	CA*F3131*6D*+MBVC1200**-.1A*+TXV		18,400	13,800	15.00	12.50	4385561
	CA*F3131*6D*+TXV	A*VC80604B*A*	18,400	13,800	15.00	12.50	4870068
	CA*F3131*6D*+TXV	G*VC80604B*A*	18,400	13,800	15.00	12.50	4870062
	CA*F3131*6D*+TXV	GME950603BXA*	18,000	13,500	15.00	12.50	4701052
	CA*F3131*6D*+TXV	GME950403BXA*	18,400	13,800	15.00	12.50	4701050
	CA*F3131*6D*+TXV	G*VM960603BXA*	18,400	13,800	15.00	12.50	4652043
	CA*F3131*6D*+TXV	A*VM960603BXA*	18,400	13,800	15.00	12.50	4652042
	CA*F3131*6D*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4652017
	CA*F3131*6D*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4652016
	CA*F3131*6D*+TXV	A*VC80704BXA*	18,400	13,800	15.00	12.50	4588865
	CA*F3131*6D*+TXV	G*VC90704CXA*	18,000	13,500	15.00	12.50	4588716
	CA*F3131*6D*+TXV	G*VC80704BXA*	18,400	13,800	15.00	12.50	4559581
	CA*F3131*6D*+TXV	G*VC950704CXA*	18,000	13,500	15.00	12.50	4385591
	CA*F3131*6D*+TXV	A*VC950704CXA*	18,000	13,500	15.00	12.50	4385590
	CA*F3131*6D*+TXV	A*VC90704CXA*	18,000	13,500	15.00	12.50	4385589
	CA*F3131*6D*+TXV	A*VC950453BXA*	18,400	13,800	15.00	12.50	4385588
	CA*F3131*6D*+TXV	G*VC950714CXA*	18,000	13,500	15.00	12.50	4385587
	CA*F3131*6D*+TXV	A*VC950714CXA*	18,000	13,500	15.00	12.50	4385586
	CA*F3131*6D*+TXV	G*VC950453BXA*	18,400	13,800	15.00	12.50	4385585
	CA*F3636*6D*+EEP		18,000	13,500	13.80	11.80	4696195
	CA*F3636*6D*+EEP+TXV		18,000	13,500	14.00	12.00	4392770
	CA*F3636*6D*+MBVC1200**-.1A*+TXV		18,400	13,800	15.00	12.50	4392771
	CA*F3743*6D*+EEP+TXV		18,400	13,800	14.50	12.20	4415026
	CA*F3743*6D*+TXV	GME950603BXA*	18,000	13,500	15.00	12.50	4701074
	CA*F3743*6D*+TXV	GME950403BXA*	18,000	13,500	15.00	12.50	4701070
	CA*F3743*6D*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4652027
	CA*F3743*6D*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4652026
	CA*F3743*6D*+TXV	G*VM960603BXA*	18,000	13,500	15.00	12.50	4651997
	CA*F3743*6D*+TXV	A*VM960603BXA*	18,000	13,500	15.00	12.50	4651996
	CA*F3743*6D*+TXV	G*VC90704CXA*	18,000	13,500	15.00	12.50	4589798
	CA*F3743*6D*+TXV	G*VC950714CXA*	18,000	13,500	15.00	12.50	4415072
	CA*F3743*6D*+TXV	G*VC950704CXA*	18,000	13,500	15.00	12.50	4415071
	CA*F3743*6D*+TXV	G*VC950453BXA*	18,000	13,500	15.00	12.50	4415070
	CA*F3743*6D*+TXV	A*VC950714CXA*	18,000	13,500	15.00	12.50	4415069
	CA*F3743*6D*+TXV	A*VC950704CXA*	18,000	13,500	15.00	12.50	4415068
	CA*F3743*6D*+TXV	A*VC950453BXA*	18,000	13,500	15.00	12.50	4415067
	CA*F3743*6D*+TXV	A*VC90704CXA*	18,000	13,500	15.00	12.50	4415066
	CHPF2430B6C*+EEP+TXV		18,000	13,500	14.00	12.00	3456819
CHPF2430B6C*+MBE1200**-.1B*+TXV		18,000	13,500	15.00	12.50	3456820	
CHPF2430B6C*+MBVC1200**-.1A*+TXV		18,000	13,500	15.00	12.50	3609463	
CHPF2430B6C*+TXV	A*VC80604B*A*	18,000	13,500	15.00	12.50	4870069	
CHPF2430B6C*+TXV	G*VC80604B*A*	18,000	13,500	15.00	12.50	4870064	
CHPF2430B6C*+TXV	G*E80603B*A*	18,000	13,500	15.00	12.50	4870063	
CHPF2430B6C*+TXV	GME950403BXA*	18,000	13,500	15.00	12.50	4701106	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0181B* (cont.)	CHPF2430B6C*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4652032
	CHPF2430B6C*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4652031
	CHPF2430B6C*+TXV	A*VM960603BXA*	18,000	13,500	15.00	12.50	4652001
	CHPF2430B6C*+TXV	G*VM960603BXA*	18,000	13,500	15.00	12.50	4652000
	CHPF2430B6C*+TXV	A*VC80704BXA*	18,000	13,500	15.00	12.50	4588866
	CHPF2430B6C*+TXV	G*VC80704BXA*	18,000	13,500	15.00	12.50	4392940
	CHPF2430B6C*+TXV	A*VC950453BXA*	18,000	13,500	15.00	12.50	3607291
	CHPF2430B6C*+TXV	G*E80703B**	18,000	13,500	15.00	12.50	3603249
	CHPF2430B6C*+TXV	G*VC950453BXA*	18,000	13,500	15.00	12.50	3597962
	CHPF3636B6C*+EEP		18,000	13,500	13.80	11.80	4696196
	CHPF3636B6C*+EEP+TXV		18,400	13,800	14.50	12.20	3456825
	CSCF3036N6D*+EEP+TXV		18,400	13,800	14.00	12.00	4767451
	CSCF3036N6D*+TXV	G*VC950704CXA*	18,400	13,800	15.00	12.50	4767458
	CSCF3036N6D*+TXV	G*VC950453BXA*	18,400	13,800	15.00	12.50	4767457
	CSCF3036N6D*+TXV	G*VC80704BXA*	18,400	13,800	15.00	12.50	4767456
	CSCF3036N6D*+TXV	G*E80704B***	18,400	13,800	15.00	12.50	4767455
	CSCF3036N6D*+TXV	G*E80703B***	18,400	13,800	15.00	12.50	4767454
	CSCF3036N6D*+TXV	A*VC950704CXA*	18,400	13,800	15.00	12.50	4767453
	CSCF3036N6D*+TXV	A*VC950453BXA*	18,400	13,800	15.00	12.50	4767452
	CSCF3642N6D*+EEP+TXV		18,400	13,800	14.50	12.00	4767459
SSX14 0241B*	AEPF313716A*		24,000	17,800	15.00	12.50	3456838
	AR*F193116C*		24,000	17,800	14.00	12.00	4260515
	ASPF313716E*		24,000	17,800	15.00	12.50	4355455
	AVPTC313714A*		24,000	17,800	15.00	12.50	4431251
	AWUF31XX16A*		23,000	17,000	14.50	12.00	3629344
	AWUF32XX16A*		23,000	17,000	14.50	12.00	3629345
	CA*F3636*6D*	A*VC80604B*A*	23,600	17,500	15.00	12.50	4870093
	CA*F3636*6D*	G*VC80604B*A*	23,600	17,500	15.00	12.50	4870074
	CA*F3636*6D*	G*E80603B*A*	23,600	17,500	15.00	12.50	4870073
	CA*F3636*6D*	GME950603BXA*	23,400	17,300	14.50	12.00	4703591
	CA*F3636*6D*	GME950403BXA*	23,400	17,300	14.50	12.30	4703562
	CA*F3636*6D*	G*VM960805DXA*	23,600	17,500	15.00	12.50	4655224
	CA*F3636*6D*	G*VM960805CXA*	23,600	17,500	15.00	12.50	4655214
	CA*F3636*6D*	A*VM960805DXA*	23,600	17,500	15.00	12.50	4652151
	CA*F3636*6D*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652101
	CA*F3636*6D*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652099
	CA*F3636*6D*	G*VM960603BXA*	23,600	17,500	15.00	12.50	4652075
	CA*F3636*6D*	A*VM960603BXA*	23,600	17,500	15.00	12.50	4652073
	CA*F3636*6D*	A*VM960805CXA*	23,600	17,500	15.00	12.50	4652068
	CA*F3636*6D*	G*VC950915DXA*	23,600	17,500	15.00	12.50	4588739
	CA*F3636*6D*	G*VC950905DXA*	23,600	17,500	15.00	12.50	4588738
	CA*F3636*6D*	G*VC950905CXA*	23,600	17,500	15.00	12.50	4588737
	CA*F3636*6D*	G*VC90905DXA*	23,600	17,500	15.00	12.50	4588736
	CA*F3636*6D*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4392788
	CA*F3636*6D*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4392787
	CA*F3636*6D*	G*VC950453BXA*	23,600	17,500	15.00	12.50	4392786
	CA*F3636*6D*	G*VC90704CXA*	23,600	17,500	14.50	12.50	4392785
	CA*F3636*6D*	G*VC80704BXA*	23,600	17,500	15.00	12.50	4392784
	CA*F3636*6D*	G*E80703B**	23,600	17,500	15.00	12.50	4392782
	CA*F3636*6D*	A*VC950915DXA*	23,600	17,500	15.00	12.50	4392781
	CA*F3636*6D*	A*VC950905DXA*	23,600	17,500	15.00	12.50	4392780
	CA*F3636*6D*	A*VC950905CXA*	23,600	17,500	15.00	12.50	4392779
CA*F3636*6D*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4392778	
CA*F3636*6D*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4392777	
CA*F3636*6D*	A*VC950453BXA*	23,600	17,500	15.00	12.50	4392776	
CA*F3636*6D*	A*VC90905DXA*	23,600	17,500	15.00	12.50	4392775	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0241B* (cont.)	CA*F3636*6D*	A*VC90704CXA*	23,600	17,500	15.00	12.50	4392774
	CA*F3636*6D*	A*VC80704BXA*	23,600	17,500	15.00	12.50	4392773
	CA*F3636*6D*+EEP		24,000	17,800	14.00	12.00	4392789
	CA*F3636*6D*+MBVC1200** -1A*		24,000	17,800	15.00	12.50	4392790
	CA*F3642*6D*	A*VC81005C*A*	23,600	17,500	15.00	12.50	4870095
	CA*F3642*6D*	ADVC81005C*A*	23,600	17,500	15.00	12.50	4870078
	CA*F3642*6D*	G*VC81005C*A*	23,600	17,500	15.00	12.50	4870077
	CA*F3642*6D*	GME950603BXA*	23,400	17,300	14.50	12.00	4703600
	CA*F3642*6D*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652110
	CA*F3642*6D*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652109
	CA*F3642*6D*	A*VC81155CXA*	23,600	17,500	15.00	12.50	4588871
	CA*F3642*6D*	G*VC90704CXA*	23,600	17,500	15.00	12.50	4588742
	CA*F3642*6D*	G*VC81155CXA*	23,600	17,500	15.00	12.50	4392943
	CA*F3642*6D*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4201785
	CA*F3642*6D*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4201784
	CA*F3642*6D*	G*VC950704CXA*	23,600	17,500	15.00	12.50	3880014
	CA*F3642*6D*	A*VC950704CXA*	23,600	17,500	15.00	12.50	3880012
	CA*F3642*6D*	A*VC90704CXA*	23,600	17,500	15.00	12.50	3880011
	CA*F3642*6D*+EEP		24,000	17,800	14.00	12.00	3880052
	CA*F3642*6D*+TXV	GME950603BXA*	23,400	17,300	15.00	12.50	4703628
	CA*F3743*6D*	GME950603BXA*	23,400	17,300	14.50	12.00	4703608
	CA*F3743*6D*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652127
	CA*F3743*6D*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652124
	CA*F3743*6D*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4588872
	CA*F3743*6D*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4415076
	CA*F3743*6D*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4415075
	CA*F3743*6D*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4415074
	CA*F3743*6D*+EEP		24,000	17,800	14.00	12.00	4415077
	CA*F3743*6D*+EEP+TXV		24,000	17,800	14.50	12.20	4415078
	CA*F3743*6D*+TXV	GME950603BXA*	23,400	17,300	14.50	12.00	4703610
	CA*F3743*6D*+TXV	GME950403BXA*	23,400	17,300	15.00	12.50	4703566
	CA*F3743*6D*+TXV	G*VM960604CXA*	23,600	17,500	15.00	12.50	4655219
	CA*F3743*6D*+TXV	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652130
	CA*F3743*6D*+TXV	A*VM960603BXA*	23,600	17,500	15.00	12.50	4652082
	CA*F3743*6D*+TXV	G*VM960603BXA*	23,600	17,500	15.00	12.50	4652081
	CA*F3743*6D*+TXV	G*VC950714CXA*	23,600	17,500	15.00	12.50	4589801
	CA*F3743*6D*+TXV	G*VC950704CXA*	23,600	17,500	15.00	12.50	4589800
	CA*F3743*6D*+TXV	G*VC90704CXA*	23,600	17,500	15.00	12.50	4589799
	CA*F3743*6D*+TXV	A*VC950714CXA*	23,600	17,500	15.00	12.50	4415155
	CA*F3743*6D*+TXV	A*VC950704CXA*	23,600	17,500	15.00	12.50	4415100
	CA*F3743*6D*+TXV	A*VC950453BXA*	23,600	17,500	15.00	12.50	4415099
	CA*F3743*6D*+TXV	A*VC90704CXA*	23,600	17,500	15.00	12.50	4415098
	CA*F3743*6D*+TXV	G*VC950453BXA*	23,600	17,500	15.00	12.50	4415083
	CHPF3636B6C*	A*VC80604B*A*	23,600	17,500	14.50	12.20	4870096
	CHPF3636B6C*	G*VC80604B*A*	23,600	17,500	14.50	12.20	4870080
	CHPF3636B6C*	G*E80603B*A*	23,600	17,500	14.50	12.20	4870079
	CHPF3636B6C*	GME950403BXA*	23,400	17,300	14.50	12.30	4703571
	CHPF3636B6C*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652133
	CHPF3636B6C*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652131
	CHPF3636B6C*	G*VM960603BXA*	23,600	17,500	15.00	12.50	4652088
CHPF3636B6C*	A*VM960603BXA*	23,600	17,500	15.00	12.50	4652085	
CHPF3636B6C*	A*VC80704BXA*	23,600	17,500	14.50	12.20	4588873	
CHPF3636B6C*	G*VC80704BXA*	23,600	17,500	14.50	12.20	4392944	
CHPF3636B6C*	A*VC950453BXA*	23,600	17,500	15.00	12.50	3607280	
CHPF3636B6C*	G*E80703B**	23,600	17,500	14.50	12.20	3603197	
CHPF3636B6C*	G*VC950453BXA*	23,600	17,500	15.00	12.50	3598041	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0241B* (cont.)	CHPF3636B6C*+EEP		24,000	17,800	14.00	12.00	3456873
	CHPF3636B6C*+EEP+TXV		24,000	17,800	14.50	12.20	3456874
	CHPF3636B6C*+MBE1200**-1B*		24,000	17,800	15.00	12.50	3456875
	CHPF3636B6C*+MBVC1200**-1A*		24,000	17,800	15.00	12.50	3609468
	CHPF3642C6C*	A*VC81005C*A*	23,000	17,000	15.00	12.50	4870098
	CHPF3642C6C*	A*VC80805C*A*	23,000	17,000	15.00	12.50	4870097
	CHPF3642C6C*	ADVC81005C*A*	23,000	17,000	15.00	12.50	4870085
	CHPF3642C6C*	ADVC80805C*A*	23,000	17,000	15.00	12.50	4870084
	CHPF3642C6C*	G*VC81005C*A*	23,000	17,000	15.00	12.50	4870082
	CHPF3642C6C*	G*VC80805C*A*	23,000	17,000	15.00	12.50	4870081
	CHPF3642C6C*	GME950603BXA*	23,400	17,300	14.50	12.00	4703616
	CHPF3642C6C*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652139
	CHPF3642C6C*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652137
	CHPF3642C6C*	A*VC81155CXA*	23,000	17,000	15.00	12.50	4588875
	CHPF3642C6C*	A*VC80905CXA*	23,000	17,000	15.00	12.50	4588874
	CHPF3642C6C*	G*VC90704CXA*	23,600	17,500	15.00	12.50	4588751
	CHPF3642C6C*	G*VC81155CXA*	23,000	17,000	15.00	12.50	4392946
	CHPF3642C6C*	G*VC80905CXA*	23,000	17,000	15.00	12.50	4392945
	CHPF3642C6C*	A*VC950704CXA*	23,600	17,500	15.00	12.50	3607301
	CHPF3642C6C*	A*VC90704CXA*	23,600	17,500	15.00	12.50	3607282
	CHPF3642C6C*	G*VC950704CXA*	23,600	17,500	15.00	12.50	3598248
	CHPF3642C6C*+TXV	GME950603BXA*	23,400	17,300	15.00	12.50	4703636
	CSCF3036N6D*	G*VC950704CXA*	23,600	17,500	14.50	12.20	4767468
	CSCF3036N6D*	G*VC950453BXA*	23,600	17,500	14.50	12.20	4767467
	CSCF3036N6D*	G*VC81155CXA*	23,600	17,500	15.00	12.50	4767466
	CSCF3036N6D*	G*VC80905CXA*	23,600	17,500	15.00	12.50	4767465
	CSCF3036N6D*	G*VC80704BXA*	23,600	17,500	14.50	12.20	4767464
	CSCF3036N6D*	G*E80704B***	23,600	17,500	14.50	12.20	4767463
	CSCF3036N6D*	G*E80703B***	23,600	17,500	14.50	12.20	4767462
	CSCF3036N6D*	A*VC950704CXA*	23,600	17,500	14.50	12.20	4767461
	CSCF3036N6D*	A*VC950453BXA*	23,600	17,500	14.50	12.20	4767460
	CSCF3036N6D*+EEP		23,600	17,500	14.00	12.00	4767469
CSCF3642N6D*+EEP+TXV		24,000	17,800	14.00	12.00	4767470	
SSX14 0301B*	AEPF313716A*		28,800	22,500	15.00	12.50	3456892
	AR*F193116C*		28,800	22,500	14.00	12.00	4260516
	AR*F363616C*		28,000	21,800	13.50	11.80	4260510
	ASPF313716E*		29,000	22,600	15.00	12.50	4355456
	AVPTC313714A*		28,800	22,500	15.00	12.50	4431253
	AWUF31XX16A*		28,000	21,800	14.00	12.00	3634601
	AWUF31XX16A*+TXV		28,400	22,200	14.50	12.30	4055885
	AWUF32XX16A*		28,000	21,800	14.00	12.00	3629346
	AWUF32XX16A*+TXV		28,400	22,200	14.50	12.30	4055886
	AWUF37XX16B*		28,400	22,200	14.00	12.00	4635479
	AWUF37XX16B*+TXV		28,600	22,300	14.50	12.00	4635481
	CA*F3636*6D*	GME950403BXA*	28,800	22,500	15.00	12.80	4701055
	CA*F3636*6D*	G*VM960604CXA*	28,800	22,500	14.50	12.30	4655234
	CA*F3636*6D*	G*VM960603BXA*	28,800	22,500	15.00	12.80	4655230
	CA*F3636*6D*	A*VM960604CXA*	28,800	22,500	14.50	12.30	4652327
	CA*F3636*6D*	A*VM960603BXA*	28,800	22,500	15.00	12.80	4652297
	CA*F3636*6D*	G*VC950714CXA*	28,800	22,500	14.50	12.30	4588766
	CA*F3636*6D*	G*VC950704CXA*	28,800	22,500	14.50	12.30	4588765
	CA*F3636*6D*	G*VC950453BXA*	28,800	22,500	15.00	12.80	4588764
	CA*F3636*6D*	G*VC90704CXA*	28,800	22,500	14.50	12.30	4588763
	CA*F3636*6D*	A*VC950714CXA*	28,800	22,500	14.50	12.30	4392794
	CA*F3636*6D*	A*VC950704CXA*	28,800	22,500	14.50	12.30	4392793
	CA*F3636*6D*	A*VC950453BXA*	28,800	22,500	15.00	12.80	4392792

See Notes on Page 34.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0301B* (cont.)	CA*F3636*6D*	A*VC90704CXA*	28,800	22,500	14.50	12.30	4392791
	CA*F3636*6D*+EEP+TXV		28,800	22,500	14.00	12.00	4392795
	CA*F3636*6D*+MBVC1200**-.1A*		28,800	22,500	15.00	12.50	4559583
	CA*F3636*6D*+TXV	A*VC80604B*A*	28,000	21,800	15.00	12.40	4870122
	CA*F3636*6D*+TXV	G*VC80604B*A*	28,000	21,800	15.00	12.40	4870104
	CA*F3636*6D*+TXV	GME950603BXA*	28,600	22,300	14.50	12.30	4703640
	CA*F3636*6D*+TXV	A*VC80704BXA*	28,000	21,800	15.00	12.50	4588884
	CA*F3636*6D*+TXV	G*VC80704BXA*	28,000	21,800	15.00	12.50	4559584
	CA*F3642*6D*	A*VC80805C*A*	28,600	22,300	15.00	12.50	4887384
	CA*F3642*6D*	ADVC80805C*A*	28,600	22,300	15.00	12.50	4887378
	CA*F3642*6D*	G*VC80805C*A*	28,600	22,300	15.00	12.50	4887377
	CA*F3642*6D*	A*VC81005C*A*	28,600	22,300	15.00	12.50	4886934
	CA*F3642*6D*	ADVC81005C*A*	28,600	22,300	15.00	12.50	4886926
	CA*F3642*6D*	G*VC81005C*A*	28,600	22,300	15.00	12.50	4886925
	CA*F3642*6D*	G*VM960805DXA*	29,000	22,600	15.00	12.50	4652417
	CA*F3642*6D*	A*VM960805DXA*	29,000	22,600	15.00	12.50	4652416
	CA*F3642*6D*	G*VM960805CXA*	29,000	22,600	15.00	12.50	4652392
	CA*F3642*6D*	A*VM960805CXA*	29,000	22,600	15.00	12.50	4652391
	CA*F3642*6D*	A*VM960604CXA*	28,800	22,500	15.00	12.50	4652334
	CA*F3642*6D*	G*VM960604CXA*	28,800	22,500	15.00	12.50	4652333
	CA*F3642*6D*	A*VM961005DXA*	28,600	22,300	14.70	12.30	4652250
	CA*F3642*6D*	G*VM961005DXA*	28,600	22,300	14.70	12.30	4652249
	CA*F3642*6D*	A*VM961155DXA*	28,600	22,300	14.70	12.30	4652236
	CA*F3642*6D*	G*VM961155DXA*	28,600	22,300	14.70	12.30	4652235
	CA*F3642*6D*	A*VC81155CXA*	28,800	22,500	15.00	12.50	4588889
	CA*F3642*6D*	A*VC80905CXA*	28,800	22,500	15.00	12.50	4588888
	CA*F3642*6D*	G*VC81155CXA*	28,800	22,500	15.00	12.50	4392955
	CA*F3642*6D*	G*VC80905CXA*	28,800	22,500	15.00	12.50	4392954
	CA*F3642*6D*	G*VC950915DXA*	29,000	22,600	15.00	12.50	4201835
	CA*F3642*6D*	A*VC950915DXA*	29,000	22,600	15.00	12.50	4201834
	CA*F3642*6D*	G*VC950714CXA*	28,800	22,500	15.00	12.50	4201819
	CA*F3642*6D*	A*VC950714CXA*	28,800	22,500	15.00	12.50	4201818
	CA*F3642*6D*	G*VC950905CXA*	29,000	22,600	15.00	12.50	4201294
	CA*F3642*6D*	A*VC950905CXA*	29,000	22,600	15.00	12.50	4201293
	CA*F3642*6D*	G*VC951155DXA*	28,600	22,300	14.70	12.30	3880034
	CA*F3642*6D*	G*VC950905DXA*	29,000	22,600	15.00	12.50	3880033
	CA*F3642*6D*	G*VC950704CXA*	28,800	22,500	15.00	12.50	3880032
	CA*F3642*6D*	G*VC90704CXA*	28,800	22,500	14.20	11.80	3880031
	CA*F3642*6D*	A*VC951155DXA*	28,600	22,300	14.70	12.30	3880026
	CA*F3642*6D*	A*VC950905DXA*	29,000	22,600	15.00	12.50	3880025
	CA*F3642*6D*	A*VC950704CXA*	28,800	22,500	15.00	12.50	3880024
	CA*F3642*6D*	A*VC90704CXA*	28,800	22,500	15.00	12.50	3880023
	CA*F3642*6D*+EEP		28,800	22,500	14.00	12.00	4559586
	CA*F3642*6D*+TXV	G*E81005C*A*	28,800	22,500	15.00	12.40	4870110
	CA*F3642*6D*+TXV	G*E80805C*A*	28,800	22,500	15.00	12.40	4870109
	CA*F3642*6D*+TXV	G*E80603B*A*	28,800	22,500	15.00	12.40	4870108
	CA*F3642*6D*+TXV	GME950603BXA*	28,600	22,300	15.00	12.50	4703649
	CA*F3642*6D*+TXV	G*E80703B**	28,800	22,500	15.00	12.50	4559587
	CA*F3642*6D*+TXV	G*E81155C**	28,800	22,500	15.00	12.50	3880140
	CA*F3642*6D*+TXV	G*E80905C**	28,800	22,500	15.00	12.50	3880139
CA*F3743*6D*	GME950403BXA*	28,800	22,500	14.50	12.20	4701065	
CA*F3743*6D*	G*VM960805DXA*	29,000	22,600	15.00	12.50	4652426	
CA*F3743*6D*	A*VM960805DXA*	29,000	22,600	15.00	12.50	4652425	
CA*F3743*6D*	G*VM960805CXA*	29,000	22,600	15.00	12.50	4652398	
CA*F3743*6D*	A*VM960805CXA*	29,000	22,600	15.00	12.50	4652397	
CA*F3743*6D*	A*VM960604CXA*	28,800	22,500	15.00	12.50	4652349	

See Notes on Page 34.



# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0301B* (cont.)	CA*F3743*6D*	G*VM960604CXA*	28,800	22,500	15.00	12.50	4652348
	CA*F3743*6D*	G*VM960603BXA*	28,800	22,500	14.50	12.20	4652310
	CA*F3743*6D*	A*VM960603BXA*	28,800	22,500	14.50	12.20	4652309
	CA*F3743*6D*	A*VM961005DXA*	28,600	22,300	14.70	12.30	4652260
	CA*F3743*6D*	G*VM961005DXA*	28,600	22,300	14.70	12.30	4652259
	CA*F3743*6D*	A*VM961155DXA*	28,600	22,300	14.70	12.30	4652246
	CA*F3743*6D*	G*VM961155DXA*	28,600	22,300	14.70	12.30	4652245
	CA*F3743*6D*	A*VC90704CXA*	28,800	22,500	14.20	11.80	4588891
	CA*F3743*6D*	G*VC950915DXA*	29,000	22,600	15.00	12.50	4415160
	CA*F3743*6D*	A*VC950915DXA*	29,000	22,600	15.00	12.50	4415159
	CA*F3743*6D*	G*VC950714CXA*	28,800	22,500	15.00	12.50	4415157
	CA*F3743*6D*	A*VC950714CXA*	28,800	22,500	15.00	12.50	4415156
	CA*F3743*6D*	A*VC950905CXA*	29,000	22,600	15.00	12.50	4415143
	CA*F3743*6D*	G*VC950905CXA*	29,000	22,600	15.00	12.50	4415142
	CA*F3743*6D*	A*VC951155DXA*	28,600	22,300	14.70	12.30	4415136
	CA*F3743*6D*	A*VC950905DXA*	29,000	22,600	15.00	12.50	4415135
	CA*F3743*6D*	A*VC950704CXA*	28,800	22,500	15.00	12.50	4415134
	CA*F3743*6D*	A*VC950453BXA*	28,800	22,500	14.50	12.20	4415132
	CA*F3743*6D*	G*VC951155DXA*	28,600	22,300	14.70	12.30	4415090
	CA*F3743*6D*	G*VC950905DXA*	29,000	22,600	15.00	12.50	4415089
	CA*F3743*6D*	G*VC950704CXA*	28,800	22,500	15.00	12.50	4415087
	CA*F3743*6D*	G*VC950453BXA*	28,800	22,500	14.50	12.20	4415084
	CA*F3743*6D*	G*VC90704CXA*	28,800	22,500	14.20	11.80	4415082
	CA*F3743*6D*+EEP+TXV		28,800	22,500	14.50	12.20	4415079
	CA*F3743*6D*+TXV	G*E81005C*A*	28,800	22,500	15.00	12.40	4870114
	CA*F3743*6D*+TXV	G*E80805C*A*	28,800	22,500	15.00	12.40	4870113
	CA*F3743*6D*+TXV	GME950603BXA*	28,600	22,300	15.00	12.50	4703654
	CA*F3743*6D*+TXV	GME950403BXA*	28,800	22,500	15.00	12.50	4701071
	CA*F3743*6D*+TXV	G*VM960604CXA*	28,800	22,500	15.00	12.50	4655241
	CA*F3743*6D*+TXV	A*VM960604CXA*	28,800	22,500	15.00	12.50	4652352
	CA*F3743*6D*+TXV	A*VM960603BXA*	28,800	22,500	15.00	12.50	4652317
	CA*F3743*6D*+TXV	G*VM960603BXA*	28,800	22,500	15.00	12.50	4652316
	CA*F3743*6D*+TXV	G*VC950905DXA*	28,800	22,500	15.00	13.00	4589806
	CA*F3743*6D*+TXV	G*VC950714CXA*	28,800	22,500	15.00	12.50	4589805
	CA*F3743*6D*+TXV	G*VC950704CXA*	28,800	22,500	15.00	12.50	4589804
	CA*F3743*6D*+TXV	G*VC90905DXA*	28,800	22,500	15.00	13.00	4589803
	CA*F3743*6D*+TXV	G*VC90704CXA*	28,800	22,500	15.00	12.50	4589802
	CA*F3743*6D*+TXV	A*VC950905DXA*	28,800	22,500	15.00	13.00	4415178
	CA*F3743*6D*+TXV	A*VC90905DXA*	28,800	22,500	15.00	13.00	4415177
	CA*F3743*6D*+TXV	A*VC950714CXA*	28,800	22,500	15.00	12.50	4415158
	CA*F3743*6D*+TXV	A*VC950453BXA*	28,800	22,500	15.00	12.50	4415133
	CA*F3743*6D*+TXV	A*VC950704CXA*	28,800	22,500	15.00	12.50	4415102
	CA*F3743*6D*+TXV	A*VC90704CXA*	28,800	22,500	15.00	12.50	4415101
	CA*F3743*6D*+TXV	G*VC950453BXA*	28,800	22,500	15.00	12.50	4415085
	CA*F3743*6D*+TXV	G*E81155C**	28,800	22,500	15.00	12.50	4415081
	CA*F3743*6D*+TXV	G*E80905C**	28,800	22,500	15.00	12.50	4415080
	CA*F4860*6D*	G*VM960805DXA*	28,800	22,500	15.00	13.00	4655243
	CA*F4860*6D*	G*VM960805CXA*	28,800	22,500	15.00	13.00	4655227
	CA*F4860*6D*	A*VM960805DXA*	28,800	22,500	15.00	13.00	4652383
	CA*F4860*6D*	A*VM960805CXA*	28,800	22,500	15.00	13.00	4652293
CA*F4860*6D*	G*VC950915DXA*	28,800	22,500	15.00	13.00	4588791	
CA*F4860*6D*	G*VC950905DXA*	28,800	22,500	15.00	13.00	4588790	
CA*F4860*6D*	G*VC950905CXA*	28,800	22,500	15.00	13.00	4588789	
CA*F4860*6D*	G*VC90905DXA*	28,800	22,500	15.00	13.00	4588788	
CA*F4860*6D*	A*VC950915DXA*	28,800	22,500	15.00	13.00	4201839	
CA*F4860*6D*	A*VC950905CXA*	28,800	22,500	15.00	13.00	4201298	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0301B* (cont.)	CA*F4860*6D*	A*VC950905DXA*	28,800	22,500	15.00	13.00	3880201
	CA*F4860*6D*	A*VC90905DXA*	28,800	22,500	15.00	13.00	3880200
	CHPF3636B6C*	GME950403BXA*	28,800	22,500	15.00	12.50	4701108
	CHPF3636B6C*	A*VM960603BXA*	28,800	22,500	15.00	12.50	4652319
	CHPF3636B6C*	G*VM960603BXA*	28,800	22,500	15.00	12.50	4652318
	CHPF3636B6C*	A*VC950453BXA*	28,800	22,500	15.00	12.50	3607293
	CHPF3636B6C*	G*VC950453BXA*	28,800	22,500	15.00	12.50	3598113
	CHPF3636B6C*+EEP		28,800	22,500	14.00	12.00	3456928
	CHPF3636B6C*+MBE1200** -1B*		28,800	22,500	15.00	12.50	3456929
	CHPF3636B6C*+MBVC1200** -1A*		28,800	22,500	15.00	12.50	3609470
	CHPF3642C6C*	A*VC80805C*A*	28,600	22,300	15.00	12.50	4887385
	CHPF3642C6C*	ADVC80805C*A*	28,600	22,300	15.00	12.50	4887380
	CHPF3642C6C*	G*VC80805C*A*	28,600	22,300	15.00	12.50	4887379
	CHPF3642C6C*	A*VC81005C*A*	28,600	22,300	15.00	12.50	4886936
	CHPF3642C6C*	A*VC80604B*A*	28,600	22,300	15.00	12.40	4886935
	CHPF3642C6C*	ADVC81005C*A*	28,600	22,300	15.00	12.50	4886929
	CHPF3642C6C*	G*VC81005C*A*	28,600	22,300	15.00	12.50	4886928
	CHPF3642C6C*	G*VC80604B*A*	28,600	22,300	15.00	12.40	4886927
	CHPF3642C6C*	G*VM960604CXA*	28,800	22,500	15.00	12.50	4652360
	CHPF3642C6C*	A*VM960604CXA*	28,800	22,500	15.00	12.50	4652356
	CHPF3642C6C*	A*VC81155CXA*	28,800	22,500	15.00	12.50	4588894
	CHPF3642C6C*	A*VC80905CXA*	28,800	22,500	15.00	12.50	4588893
	CHPF3642C6C*	A*VC80704BX*	28,800	22,500	15.00	13.00	4588892
	CHPF3642C6C*	G*VC90704CXA*	28,800	22,500	15.00	12.50	4588793
	CHPF3642C6C*	G*VC81155CXA*	28,800	22,500	15.00	12.50	4392958
	CHPF3642C6C*	G*VC80905CXA*	28,800	22,500	15.00	12.50	4392957
	CHPF3642C6C*	G*VC80704BX*	28,800	22,500	15.00	13.00	4392956
	CHPF3642C6C*	G*VC80704BXA*	28,800	22,500	15.00	13.00	4216682
	CHPF3642C6C*	A*VC80704BXA*	28,800	22,500	15.00	13.00	4216681
	CHPF3642C6C*	A*VC950704CXA*	28,800	22,500	15.00	12.50	3607304
	CHPF3642C6C*	A*VC90704CXA*	28,800	22,500	15.00	12.50	3607286
	CHPF3642C6C*	G*VC950704CXA*	28,800	22,500	15.00	12.50	3598348
	CHPF3642C6C*+EEP+TXV		28,800	22,500	14.50	12.20	4588795
	CHPF3642C6C*+TXV	GME950603BXA*	28,600	22,300	15.00	12.50	4703657
	CHPF3642D6C*	A*VM960604CXA*	28,800	22,500	15.00	12.50	4652366
	CHPF3642D6C*	G*VM960604CXA*	28,800	22,500	15.00	12.50	4652365
	CHPF3642D6C*	A*VC950704CXA*	28,800	22,500	15.00	12.50	3858177
	CHPF3642D6C*	G*VC950704CXA*	28,800	22,500	15.00	12.50	3598350
	CHPF3642D6C*+EEP		28,800	22,500	14.00	12.00	3456936
	CHPF3642D6C*+TXV	G*E81005C*A*	28,800	22,500	15.00	12.40	4870116
	CHPF3642D6C*+TXV	G*E80805C*A*	28,800	22,500	15.00	12.40	4870115
	CHPF3642D6C*+TXV	GME950603BXA*	28,600	22,300	15.00	12.50	4703663
	CHPF3642D6C*+TXV	G*E81155C**	28,800	22,500	15.00	12.50	3456938
	CHPF3642D6C*+TXV	G*E80905C**	28,800	22,500	15.00	12.50	3456937
	CSCF3642N6D*	G*VC950704CXA*	28,800	22,500	15.00	12.50	4767480
	CSCF3642N6D*	G*VC81155CXA*	28,800	22,500	15.00	12.50	4767479
	CSCF3642N6D*	G*VC80905CXA*	28,800	22,500	15.00	12.50	4767478
	CSCF3642N6D*	G*VC80704BXA*	28,800	22,500	15.00	12.50	4767477
	CSCF3642N6D*	G*E80704B***	28,000	21,800	14.50	12.50	4767476
	CSCF3642N6D*	G*E80703B***	28,000	21,800	14.50	12.50	4767475
CSCF3642N6D*	A*VC950704CXA*	28,800	22,500	15.00	12.50	4767474	
CSCF3642N6D*	A*VC81155CXA*	28,800	22,500	15.00	12.50	4767473	
CSCF3642N6D*	A*VC80905CXA*	28,800	22,500	15.00	12.50	4767472	
CSCF3642N6D*	A*VC80704BXA*	28,800	22,500	15.00	12.50	4767471	
CSCF3642N6D*+EEP		28,800	22,500	14.00	12.00	4767481	
CSCF3642N6D*+EEP+TXV		28,800	22,500	14.50	12.00	4767482	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0361B*	AEPF313716A*		34,000	26,500	14.50	12.00	3629501
	AEPF426016C*		35,000	27,300	15.00	13.00	3629502
	AR*F363616C*		33,000	25,700	13.50	11.50	4260511
	AR*F374316C*		35,000	27,300	14.00	12.00	4358265
	ASPF426016E*		34,600	27,000	15.00	12.50	4358303
	AVPTC313714A*		34,000	26,500	14.50	12.00	4431258
	AVPTC426014A*		35,000	27,300	15.00	13.00	4431261
	AWUF37XX16B*+TXV		33,000	25,700	14.50	12.20	3897191
	CA*F3636*6D*+EEP+TXV		33,000	25,700	14.00	11.80	4392796
	CA*F3642*6D*	GME950603BXA*	34,200	26,700	13.50	11.50	4703670
	CA*F3642*6D*	GME950805CXA*	34,600	27,000	15.00	12.50	4701159
	CA*F3642*6D*	G*VM960805CXA*	34,600	27,000	15.00	12.50	4652505
	CA*F3642*6D*	A*VM960805CXA*	34,600	27,000	15.00	12.50	4652504
	CA*F3642*6D*	A*VC90905DXA*	34,600	27,000	15.00	12.50	4588904
	CA*F3642*6D*	A*VC90704CXA*	34,600	27,000	14.50	12.20	4588903
	CA*F3642*6D*	G*VC950704CXA*	34,600	27,000	14.50	12.20	4588198
	CA*F3642*6D*	A*VC950905CXA*	34,600	27,000	15.00	12.50	4201313
	CA*F3642*6D*	G*VC950905CXA*	34,600	27,000	15.00	12.50	4201312
	CA*F3642*6D*	G*VC90905DXA*	34,600	27,000	15.00	12.50	3880042
	CA*F3642*6D*	G*VC90704CXA*	34,600	27,000	14.50	12.20	3880041
	CA*F3642*6D*+EEP		34,600	27,000	14.00	12.00	4588188
	CA*F3642*6D*+MBVC2000*-1A*		35,000	27,300	15.00	12.50	4887682
	CA*F3642*6D*+TXV	GME950805CXA*	34,600	27,000	15.00	12.50	4701063
	CA*F3642*6D*+TXV	G*VM960805CXA*	34,600	27,000	15.00	12.50	4652511
	CA*F3642*6D*+TXV	A*VM960805CXA*	34,600	27,000	15.00	12.50	4652510
	CA*F3642*6D*+TXV	A*VC950905CXA*	34,600	27,000	15.00	12.50	4201315
	CA*F3642*6D*+TXV	G*VC950905CXA*	34,600	27,000	15.00	12.50	4201314
	CA*F3743*6D*	GME950805CXA*	34,600	27,000	15.00	12.50	4701160
	CA*F3743*6D*	G*VM960805CXA*	34,600	27,000	15.00	12.50	4652521
	CA*F3743*6D*	A*VM960805CXA*	34,600	27,000	15.00	12.50	4652520
	CA*F3743*6D*	A*VC90905DXA*	34,600	27,000	15.00	12.50	4588908
	CA*F3743*6D*	A*VC90704CXA*	34,600	27,000	14.50	12.20	4588907
	CA*F3743*6D*	A*VC950905CXA*	34,600	27,000	15.00	12.50	4415145
	CA*F3743*6D*	G*VC950905CXA*	34,600	27,000	15.00	12.50	4415144
	CA*F3743*6D*	G*VC90905DXA*	34,600	27,000	15.00	12.50	4415092
	CA*F3743*6D*	G*VC90704CXA*	34,600	27,000	14.50	12.20	4415091
	CA*F3743*6D*+EEP		34,600	27,000	14.00	12.00	4415095
	CA*F3743*6D*+EEP+TXV		34,600	27,000	14.50	12.20	4415096
	CA*F3743*6D*+TXV	GME951005DXA*	34,600	27,000	15.00	12.50	4701079
	CA*F3743*6D*+TXV	GME950805CXA*	34,600	27,000	15.00	12.50	4701076
	CA*F3743*6D*+TXV	G*VM960805DXA*	34,600	27,000	15.00	12.50	4652582
	CA*F3743*6D*+TXV	A*VM960805DXA*	34,600	27,000	15.00	12.50	4652581
	CA*F3743*6D*+TXV	G*VM960805CXA*	34,600	27,000	15.00	12.50	4652527
	CA*F3743*6D*+TXV	A*VM960805CXA*	34,600	27,000	15.00	12.50	4652526
	CA*F3743*6D*+TXV	G*VM961005DXA*	34,600	27,000	15.00	12.50	4652485
	CA*F3743*6D*+TXV	A*VM961005DXA*	34,600	27,000	15.00	12.50	4652484
	CA*F3743*6D*+TXV	G*VM961155DXA*	34,600	27,000	15.00	12.50	4652458
	CA*F3743*6D*+TXV	A*VM961155DXA*	34,600	27,000	15.00	12.50	4652457
	CA*F3743*6D*+TXV	G*VC950915DXA*	34,600	27,000	15.00	12.50	4415162
	CA*F3743*6D*+TXV	A*VC950915DXA*	34,600	27,000	15.00	12.50	4415161
CA*F3743*6D*+TXV	A*VC950905CXA*	34,600	27,000	15.00	12.50	4415147	
CA*F3743*6D*+TXV	G*VC950905CXA*	34,600	27,000	15.00	12.50	4415146	
CA*F3743*6D*+TXV	A*VC951155DXA*	34,600	27,000	15.00	12.50	4415138	
CA*F3743*6D*+TXV	A*VC950905DXA*	34,600	27,000	15.00	12.50	4415137	
CA*F3743*6D*+TXV	G*VC951155DXA*	34,600	27,000	15.00	12.50	4415094	
CA*F3743*6D*+TXV	G*VC950905DXA*	34,600	27,000	15.00	12.50	4415093	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0361B* (cont.)	CA*F4860*6D*	A*VC81005C*A*	33,400	26,100	14.50	12.30	4887401
	CA*F4860*6D*	G*VC81005C*A*	33,400	26,100	14.50	12.30	4887391
	CA*F4860*6D*	G*E80805C*A*	33,400	26,100	15.00	12.30	4887390
	CA*F4860*6D*	A*VC80805C*A*	33,200	25,900	14.50	12.30	4886964
	CA*F4860*6D*	ADVC81005C*A*	32,600	25,400	14.50	12.30	4886949
	CA*F4860*6D*	ADVC80805C*A*	33,200	25,900	14.50	12.30	4886948
	CA*F4860*6D*	G*VC80805C*A*	33,200	25,900	14.50	12.30	4886947
	CA*F4860*6D*	G*E81005C*A*	33,600	26,200	15.00	12.30	4886946
	CA*F4860*6D*	GME950603BXA*	34,200	26,700	14.00	11.50	4703676
	CA*F4860*6D*	GME951005DXA*	34,600	27,000	14.50	12.20	4701086
	CA*F4860*6D*	GME950805CXA*	34,600	27,000	15.00	12.50	4701082
	CA*F4860*6D*	G*VM960805DXA*	34,600	27,000	15.00	12.50	4652586
	CA*F4860*6D*	A*VM960805DXA*	34,600	27,000	15.00	12.50	4652585
	CA*F4860*6D*	A*VM960604CXA*	34,600	27,000	14.50	12.20	4652550
	CA*F4860*6D*	G*VM960604CXA*	34,600	27,000	14.50	12.20	4652549
	CA*F4860*6D*	G*VM960805CXA*	34,600	27,000	15.00	12.50	4652529
	CA*F4860*6D*	A*VM960805CXA*	34,600	27,000	15.00	12.50	4652528
	CA*F4860*6D*	A*VM961005DXA*	34,600	27,000	14.50	12.20	4652489
	CA*F4860*6D*	G*VM961005DXA*	34,600	27,000	14.50	12.20	4652488
	CA*F4860*6D*	A*VM961155DXA*	34,600	27,000	14.50	12.20	4652462
	CA*F4860*6D*	G*VM961155DXA*	34,600	27,000	14.50	12.20	4652461
	CA*F4860*6D*	A*VC81155CXA*	34,600	27,000	14.50	12.50	4588913
	CA*F4860*6D*	A*VC80905CXA*	34,600	27,000	14.50	12.50	4588912
	CA*F4860*6D*	G*VC81155CXA*	34,600	27,000	14.50	12.50	4392965
	CA*F4860*6D*	G*VC80905CXA*	34,600	27,000	14.50	12.50	4392964
	CA*F4860*6D*	G*VC950915DXA*	34,600	27,000	15.00	12.50	4201875
	CA*F4860*6D*	A*VC950915DXA*	34,600	27,000	15.00	12.50	4201874
	CA*F4860*6D*	G*VC950714CXA*	34,600	27,000	14.50	12.20	4201863
	CA*F4860*6D*	A*VC950714CXA*	34,600	27,000	14.50	12.20	4201862
	CA*F4860*6D*	G*VC950905CXA*	34,600	27,000	15.00	12.50	4201323
	CA*F4860*6D*	A*VC950905CXA*	34,600	27,000	15.00	12.50	4201322
	CA*F4860*6D*	G*VC951155DXA*	34,600	27,000	14.50	12.20	3880220
	CA*F4860*6D*	G*VC950905DXA*	34,600	27,000	15.00	12.50	3880219
	CA*F4860*6D*	G*VC950704CXA*	34,600	27,000	14.50	12.20	3880218
	CA*F4860*6D*	G*E81155C**	34,600	27,000	15.00	12.50	3880214
	CA*F4860*6D*	G*E80905C**	34,600	27,000	15.00	12.50	3880213
	CA*F4860*6D*	A*VC951155DXA*	34,600	27,000	14.50	12.20	3880212
	CA*F4860*6D*	A*VC950905DXA*	34,600	27,000	15.00	12.50	3880211
	CA*F4860*6D*	A*VC950704CXA*	34,600	27,000	14.50	12.20	3880210
	CA*F4860*6D*+EEP		35,000	27,300	14.00	12.00	3880272
	CA*F4860*6D*+TXV	A*VC81005C*A*	33,400	26,100	15.00	12.30	4887402
	CA*F4860*6D*+TXV	G*VC81005C*A*	33,400	26,100	15.00	12.30	4887392
	CA*F4860*6D*+TXV	A*VC80805C*A*	33,200	25,900	15.00	12.30	4886965
	CA*F4860*6D*+TXV	ADVC81005C*A*	32,600	25,400	15.00	12.30	4886952
	CA*F4860*6D*+TXV	ADVC80805C*A*	33,200	25,900	15.00	12.30	4886951
	CA*F4860*6D*+TXV	G*VC80805C*A*	33,200	25,900	15.00	12.30	4886950
	CA*F4860*6D*+TXV	GME950603BXA*	34,200	26,700	14.50	12.00	4703678
	CA*F4860*6D*+TXV	G*VM960604CXA*	34,600	27,000	15.00	12.50	4652554
	CA*F4860*6D*+TXV	A*VM960604CXA*	34,600	27,000	15.00	12.50	4652553
	CA*F4860*6D*+TXV	A*VC81155CXA*	34,600	27,000	15.00	12.50	4588914
CA*F4860*6D*+TXV	G*VC81155CXA*	34,600	27,000	15.00	12.50	4392969	
CA*F4860*6D*+TXV	G*VC80905CXA*	34,600	27,000	15.00	12.50	4254044	
CA*F4860*6D*+TXV	A*VC80905CXA*	34,600	27,000	15.00	12.50	4254043	
CA*F4860*6D*+TXV	G*VC950714CXA*	34,600	27,000	15.00	12.50	4201865	
CA*F4860*6D*+TXV	A*VC950714CXA*	34,600	27,000	15.00	12.50	4201864	
CA*F4860*6D*+TXV	G*VC950704CXA*	34,600	27,000	15.00	12.50	3880503	
CA*F4860*6D*+TXV	A*VC950704CXA*	34,600	27,000	15.00	12.50	3880501	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0361B* (cont.)	CHPF3642C6C*	A*VC81005C*A*	33,400	26,100	14.50	12.20	4887403
	CHPF3642C6C*	G*VC81005C*A*	33,400	26,100	14.50	12.20	4887394
	CHPF3642C6C*	G*E80805C*A*	33,400	26,100	15.00	12.30	4887393
	CHPF3642C6C*	A*VC80805C*A*	33,200	25,900	14.50	12.20	4886966
	CHPF3642C6C*	ADVC81005C*A*	32,600	25,400	14.50	12.20	4886956
	CHPF3642C6C*	ADVC80805C*A*	33,200	25,900	14.50	12.20	4886955
	CHPF3642C6C*	G*VC80805C*A*	33,200	25,900	14.50	12.20	4886954
	CHPF3642C6C*	G*E81005C*A*	33,600	26,200	15.00	12.30	4886953
	CHPF3642C6C*	GME950603BXA*	34,200	26,700	13.80	11.50	4703680
	CHPF3642C6C*	A*VM960604CXA*	34,600	27,000	14.50	12.20	4652558
	CHPF3642C6C*	G*VM960604CXA*	34,600	27,000	14.50	12.20	4652557
	CHPF3642C6C*	A*VC81155CXA*	34,600	27,000	14.50	12.20	4588916
	CHPF3642C6C*	A*VC80905CXA*	34,600	27,000	14.50	12.20	4588915
	CHPF3642C6C*	G*VC81155CXA*	34,600	27,000	14.50	12.20	4392971
	CHPF3642C6C*	G*VC80905CXA*	34,600	27,000	14.50	12.20	4392970
	CHPF3642C6C*	A*VC950704CXA*	34,600	27,000	14.50	12.20	3858184
	CHPF3642C6C*	G*VC950704CXA*	34,600	27,000	14.50	12.20	3629490
	CHPF3642C6C*	G*E81155C**	34,600	27,000	15.00	12.50	3629459
	CHPF3642C6C*	G*E80905C**	34,600	27,000	15.00	12.50	3629457
	CHPF3642C6C*+EEP		34,600	27,000	14.00	12.00	4392972
	CHPF3642C6C*+TXV	A*VC81005C*A*	33,400	26,100	15.00	12.20	4887404
	CHPF3642C6C*+TXV	G*VC81005C*A*	33,400	26,100	15.00	12.20	4887395
	CHPF3642C6C*+TXV	ADVC81005C*A*	32,600	25,400	15.00	12.20	4886957
	CHPF3642C6C*+TXV	GME950603BXA*	34,200	26,700	14.50	11.50	4703682
	CHPF3642C6C*+TXV	G*VM960604CXA*	34,600	27,000	15.00	12.20	4655268
	CHPF3642C6C*+TXV	G*VC81155CXA*	34,600	27,000	15.00	12.20	4588201
	CHPF3642C6C*+TXV	G*VC950704CXA*	34,600	27,000	15.00	12.20	4588190
	CHPF3642D6C*	A*VC80604B*A*	33,600	26,200	14.50	12.20	4887405
	CHPF3642D6C*	G*VC80604B*A*	33,600	26,200	14.50	12.20	4887396
	CHPF3642D6C*	GME951005DXA*	34,600	27,000	15.00	12.20	4701112
	CHPF3642D6C*	A*VM961005DXA*	34,600	27,000	15.00	12.20	4652495
	CHPF3642D6C*	G*VM961005DXA*	34,600	27,000	15.00	12.20	4652494
	CHPF3642D6C*	A*VM961155DXA*	34,600	27,000	15.00	12.20	4652468
	CHPF3642D6C*	G*VM961155DXA*	34,600	27,000	15.00	12.20	4652467
	CHPF3642D6C*	A*VC80704BXA*	34,600	27,000	14.50	12.20	4588917
	CHPF3642D6C*	G*VC80704BXA*	34,600	27,000	14.50	12.20	4392973
	CHPF3642D6C*	A*VC951155DXA*	34,600	27,000	15.00	12.20	3858189
	CHPF3642D6C*	G*VC951155DXA*	34,600	27,000	15.00	12.20	3629498
	CHPF3642D6C*+EEP		34,600	27,000	14.00	12.00	3706349
	CHPF3642D6C*+MBE2000**-1B*		35,000	27,300	15.00	12.50	3629511
	CHPF3642D6C*+MBVC2000**-1A*		35,000	27,300	15.00	12.50	4559622
	CHPF3743D6B*	GME950805CXA*	34,400	26,800	14.50	12.20	4701117
	CHPF3743D6B*	A*VM960805CXA*	34,400	26,800	14.50	12.20	4655253
	CHPF3743D6B*	G*VM960805CXA*	34,400	26,800	14.50	12.20	4652444
	CHPF3743D6B*	A*VC950905CXA*	34,400	26,800	14.50	12.20	4588918
	CHPF3743D6B*	G*VC950905CXA*	34,400	26,800	14.50	12.20	4216687
	CHPF3743D6B*+EEP+TXV		34,600	27,000	14.50	12.20	4216686
	CHPF3743D6B*+TXV	G*VC950905DXA*	34,400	26,800	15.00	12.20	4665810
	CHPF3743D6B*+TXV	A*VC950905DXA*	34,400	26,800	15.00	12.20	4665809
	CSCF3642N6D*	G*VC80704BXA*	34,600	27,000	14.50	12.00	4767484
	CSCF3642N6D*	A*VC80704BXA*	34,600	27,000	14.50	12.00	4767483
	CSCF4860N6D*	G*VC951155DXA*	34,600	27,000	14.50	12.20	4767489
	CSCF4860N6D*	G*VC950704CXA*	34,600	27,000	14.50	12.20	4767488
	CSCF4860N6D*	G*VC81155CXA*	34,600	27,000	14.50	12.20	4767487
	CSCF4860N6D*	G*VC80905CXA*	34,600	27,000	14.50	12.20	4767486
CSCF4860N6D*	G*E81155C**	34,600	27,000	15.00	12.50	4767485	
CSCF4860N6D*+EEP+TXV		34,600	27,000	14.50	12.00	4767490	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0421C*	AEPF426016C*		40,000	31,600	15.00	12.50	3698205
	AR*F374316C*		40,000	31,600	14.50	12.20	4358304
	AR*F486016C*		40,000	31,600	14.50	12.20	4585884
	ASPF426016E*		40,000	31,600	15.00	12.50	4358306
	AVPTC426014A*		40,000	31,600	15.00	12.50	4431268
	CA*F3743*6D*+EEP+TXV		40,000	31,600	14.50	12.20	4415179
	CA*F3743*6D*+TXV	GME950805CXA*	39,500	31,200	14.50	12.20	4703738
	CA*F3743*6D*+TXV	GME951005DXA*	40,000	31,600	14.50	12.20	4701080
	CA*F3743*6D*+TXV	G*VM960805DXA*	40,000	31,600	14.50	12.20	4652904
	CA*F3743*6D*+TXV	A*VM960805DXA*	40,000	31,600	14.50	12.20	4652903
	CA*F3743*6D*+TXV	G*VM960805CXA*	40,000	31,600	14.50	12.20	4652865
	CA*F3743*6D*+TXV	A*VM960805CXA*	40,000	31,600	14.50	12.20	4652864
	CA*F3743*6D*+TXV	G*VM961005DXA*	40,000	31,600	14.50	12.20	4652849
	CA*F3743*6D*+TXV	A*VM961005DXA*	40,000	31,600	14.50	12.20	4652848
	CA*F3743*6D*+TXV	G*VM961155DXA*	40,000	31,600	14.50	12.20	4652831
	CA*F3743*6D*+TXV	A*VM961155DXA*	40,000	31,600	14.50	12.20	4652830
	CA*F3743*6D*+TXV	G*VC950915DXA*	40,000	31,600	14.50	12.20	4415166
	CA*F3743*6D*+TXV	A*VC950915DXA*	40,000	31,600	14.50	12.20	4415165
	CA*F3743*6D*+TXV	A*VC950905CXA*	40,000	31,600	14.50	12.20	4415149
	CA*F3743*6D*+TXV	G*VC950905CXA*	40,000	31,600	14.50	12.20	4415148
	CA*F3743*6D*+TXV	A*VC951155DXA*	40,000	31,600	14.50	12.20	4415140
	CA*F3743*6D*+TXV	A*VC950905DXA*	40,000	31,600	14.50	12.20	4415139
	CA*F3743*6D*+TXV	G*VC951155DXA*	40,000	31,600	14.50	12.20	4415110
	CA*F3743*6D*+TXV	G*VC950905DXA*	40,000	31,600	14.50	12.20	4415109
	CA*F4860*6D*	A*VC81005C*A*	39,000	30,800	14.00	12.00	4887413
	CA*F4860*6D*	G*VC81005C*A*	39,000	30,800	14.00	12.00	4887409
	CA*F4860*6D*	A*VC80805C*A*	39,000	30,800	14.00	12.00	4886981
	CA*F4860*6D*	ADVC81005C*A*	37,800	29,900	14.00	12.00	4886973
	CA*F4860*6D*	ADVC80805C*A*	37,800	29,900	14.00	12.00	4886972
	CA*F4860*6D*	G*VC80805C*A*	39,000	30,800	14.00	12.00	4886971
	CA*F4860*6D*	GME951005DXA*	40,000	31,600	14.70	12.50	4701087
	CA*F4860*6D*	G*VM960805DXA*	40,000	31,600	14.70	12.50	4652910
	CA*F4860*6D*	A*VM960805DXA*	40,000	31,600	14.70	12.50	4652909
	CA*F4860*6D*	A*VM960604CXA*	40,000	31,600	14.00	12.00	4652874
	CA*F4860*6D*	G*VM960604CXA*	40,000	31,600	14.00	12.00	4652873
	CA*F4860*6D*	G*VM960805CXA*	40,000	31,600	14.70	12.50	4652867
	CA*F4860*6D*	A*VM960805CXA*	40,000	31,600	14.70	12.50	4652866
	CA*F4860*6D*	G*VM961005DXA*	40,000	31,600	14.70	12.50	4652853
	CA*F4860*6D*	A*VM961005DXA*	40,000	31,600	14.70	12.50	4652852
	CA*F4860*6D*	G*VM961155DXA*	40,000	31,600	14.70	12.50	4652835
	CA*F4860*6D*	A*VM961155DXA*	40,000	31,600	14.70	12.50	4652834
	CA*F4860*6D*	A*VC81155CXA*	39,500	31,200	14.00	12.00	4588928
	CA*F4860*6D*	A*VC80905CXA*	39,500	31,200	14.00	12.00	4588927
	CA*F4860*6D*	G*VC81155CXA*	39,500	31,200	14.00	12.00	4392980
	CA*F4860*6D*	G*VC80905CXA*	39,500	31,200	14.00	12.00	4392979
	CA*F4860*6D*	G*VC950915DXA*	40,000	31,600	14.70	12.50	4201919
	CA*F4860*6D*	A*VC950915DXA*	40,000	31,600	14.70	12.50	4201918
	CA*F4860*6D*	G*VC950714CXA*	40,000	31,600	14.00	12.00	4201910
	CA*F4860*6D*	A*VC950714CXA*	40,000	31,600	14.00	12.00	4201909
	CA*F4860*6D*	G*VC950905CXA*	40,000	31,600	14.70	12.50	4201347
CA*F4860*6D*	A*VC950905CXA*	40,000	31,600	14.70	12.50	4201346	
CA*F4860*6D*	G*VC951155DXA*	40,000	31,600	14.70	12.50	3880246	
CA*F4860*6D*	G*VC950905DXA*	40,000	31,600	14.70	12.50	3880245	
CA*F4860*6D*	G*VC950704CXA*	40,000	31,600	14.00	12.00	3880244	
CA*F4860*6D*	A*VC951155DXA*	40,000	31,600	14.70	12.50	3880240	
CA*F4860*6D*	A*VC950905DXA*	40,000	31,600	14.70	12.50	3880239	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0421C* (cont.)	CA*F4860*6D*	A*VC950704CXA*	40,000	31,600	14.00	12.00	3880238
	CA*F4860*6D*+EEP		40,000	31,600	14.00	12.00	4392983
	CA*F4860*6D*+MBE2000**-1B*		40,000	31,600	15.00	12.50	3880297
	CA*F4860*6D*+MBVC2000**-1A*		40,000	31,600	15.00	12.50	3880329
	CA*F4860*6D*+TXV	GME950805CXA*	39,500	31,200	14.50	12.00	4703746
	CA*F4961*6D*+EEP		40,000	31,600	14.50	12.20	4431653
	CHPF3743D6B*+EEP+TXV		40,000	31,600	14.50	12.20	3698221
	CHPF4860D6D*	A*VC81005C*A*	39,000	30,800	14.00	12.00	4887414
	CHPF4860D6D*	G*VC81005C*A*	39,000	30,800	14.00	12.00	4887410
	CHPF4860D6D*	A*VC80805C*A*	39,000	30,800	14.00	12.00	4886982
	CHPF4860D6D*	ADVC81005C*A*	37,800	29,900	14.00	12.00	4886976
	CHPF4860D6D*	ADVC80805C*A*	37,800	29,900	14.00	12.00	4886975
	CHPF4860D6D*	G*VC80805C*A*	39,000	30,800	14.00	12.00	4886974
	CHPF4860D6D*	GME951005DXA*	40,000	31,600	15.00	12.50	4701121
	CHPF4860D6D*	G*VM960805DXA*	40,000	31,600	15.00	12.50	4652917
	CHPF4860D6D*	A*VM960805DXA*	40,000	31,600	15.00	12.50	4652916
	CHPF4860D6D*	A*VM960604CXA*	40,000	31,600	14.00	12.00	4652882
	CHPF4860D6D*	G*VM960604CXA*	40,000	31,600	14.00	12.00	4652881
	CHPF4860D6D*	G*VM960805CXA*	40,000	31,600	15.00	12.50	4652871
	CHPF4860D6D*	A*VM960805CXA*	40,000	31,600	15.00	12.50	4652870
	CHPF4860D6D*	A*VM961005DXA*	40,000	31,600	15.00	12.50	4652857
	CHPF4860D6D*	G*VM961005DXA*	40,000	31,600	15.00	12.50	4652856
	CHPF4860D6D*	A*VM961155DXA*	40,000	31,600	15.00	12.50	4652839
	CHPF4860D6D*	G*VM961155DXA*	40,000	31,600	15.00	12.50	4652838
	CHPF4860D6D*	A*VC81155CXA*	39,500	31,200	14.00	12.00	4588930
	CHPF4860D6D*	A*VC80905CXA*	39,500	31,200	14.00	12.00	4588929
	CHPF4860D6D*	G*VC81155CXA*	39,500	31,200	14.00	12.00	4392985
	CHPF4860D6D*	G*VC80905CXA*	39,500	31,200	14.00	12.00	4392984
	CHPF4860D6D*	A*VC950905CXA*	40,000	31,600	15.00	12.50	4201349
	CHPF4860D6D*	G*VC950905CXA*	40,000	31,600	15.00	12.50	4201348
	CHPF4860D6D*	A*VC951155DXA*	40,000	31,600	15.00	12.50	3858197
	CHPF4860D6D*	A*VC950905DXA*	40,000	31,600	15.00	12.50	3858196
	CHPF4860D6D*	A*VC950704CXA*	40,000	31,600	14.00	12.00	3858195
	CHPF4860D6D*	G*VC951155DXA*	40,000	31,600	15.00	12.50	3706345
	CHPF4860D6D*	G*VC950905DXA*	40,000	31,600	15.00	12.50	3698225
	CHPF4860D6D*	G*VC950704CXA*	40,000	31,600	14.00	12.00	3698224
	CHPF4860D6D*+EEP		40,000	31,600	14.00	12.00	3698226
	CHPF4860D6D*+MBE2000**-1B*		40,000	31,600	15.00	12.50	3698227
	CHPF4860D6D*+MBVC2000**-1A*		40,000	31,600	15.00	12.50	3698228
	CHPF4860D6D*+TXV	GME950805CXA*	39,500	31,200	15.00	12.00	4703750
	CSCF4860N6D*	G*VC951155DXA*	39,000	30,800	15.00	12.50	4767496
	CSCF4860N6D*	G*VC950905DXA*	39,000	30,800	15.00	12.50	4767495
	CSCF4860N6D*	G*VC950905CXA*	39,000	30,800	15.00	12.50	4767494
CSCF4860N6D*	G*VC950704CXA*	39,000	30,800	14.50	12.20	4767493	
CSCF4860N6D*	G*VC81155CXA*	39,000	30,800	14.00	12.00	4767492	
CSCF4860N6D*	G*VC80905CXA*	39,000	30,800	14.00	12.00	4767491	
CSCF4860N6D*+EEP		39,000	30,800	14.00	12.00	4767497	
CSCF4860N6D*+EEP+TXV		39,000	30,800	14.50	12.20	4767498	
SSX14 0481B*	ADPF486016C*		45,000	35,100	13.50	11.50	4588820
	AEPF426016C*		46,000	35,900	14.50	12.20	4323048
	AR*F374316C*		45,500	35,500	14.00	12.00	4559588
	AR*F486016C*		45,000	35,100	14.00	12.00	4323050
	AR*F496116C*		45,000	35,100	14.00	12.00	4588822
	ASPF426016E*		47,000	36,700	15.00	12.50	4887679
	AVPTC426014A*		46,000	35,900	14.50	12.20	4431276
	CA*F4860*6D*	G*VM960805DXA*	45,500	35,500	15.00	12.50	4653018

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0481B* (cont.)	CA*F4860*6D*	A*VM960805DXA*	45,500	35,500	15.00	12.50	4653017
	CA*F4860*6D*	G*VM960805CXA*	45,500	35,500	15.00	12.50	4652999
	CA*F4860*6D*	A*VM960805CXA*	45,500	35,500	15.00	12.50	4652998
	CA*F4860*6D*	A*VM961005DXA*	45,500	35,500	15.00	12.50	4652983
	CA*F4860*6D*	G*VM961005DXA*	45,500	35,500	15.00	12.50	4652982
	CA*F4860*6D*	A*VM961155DXA*	45,500	35,500	15.00	12.50	4652965
	CA*F4860*6D*	G*VM961155DXA*	45,500	35,500	15.00	12.50	4652964
	CA*F4860*6D*	A*VC90905DXA*	45,500	35,500	15.00	12.50	4588941
	CA*F4860*6D*	G*VC90905DXA*	45,500	35,500	15.00	12.50	4588838
	CA*F4860*6D*	G*VC950915DXA*	45,500	35,500	15.00	12.50	4342769
	CA*F4860*6D*	A*VC950915DXA*	45,500	35,500	15.00	12.50	4342767
	CA*F4860*6D*	G*VC951155DXA*	45,500	35,500	15.00	12.50	4323059
	CA*F4860*6D*	G*VC950905DXA*	45,500	35,500	15.00	12.50	4323058
	CA*F4860*6D*	G*VC950905CXA*	45,500	35,500	15.00	12.50	4323057
	CA*F4860*6D*	A*VC951155DXA*	45,500	35,500	15.00	12.50	4323056
	CA*F4860*6D*	A*VC950905DXA*	45,500	35,500	15.00	12.50	4323055
	CA*F4860*6D*	A*VC950905CXA*	45,500	35,500	15.00	12.50	4323054
	CA*F4860*6D*+EEP		45,500	35,500	14.00	12.00	4323060
	CA*F4860*6D*+EEP+TXV		45,500	35,500	14.00	12.00	4323061
	CA*F4860*6D*+MBE2000**-1B*		46,000	35,900	15.00	13.00	4323062
	CA*F4860*6D*+MBVC2000**-1A*		46,000	35,900	15.00	13.00	4323063
	CA*F4860*6D*+TXV	G*E81005C*A*	45,500	35,500	14.50	12.00	4870126
	CA*F4860*6D*+TXV	G*E80805C*A*	45,000	35,100	14.50	12.00	4870125
	CA*F4860*6D*+TXV	GME950805CXA*	45,000	35,100	15.00	12.50	4703756
	CA*F4860*6D*+TXV	GME951005DXA*	45,000	35,100	15.00	12.00	4703688
	CA*F4860*6D*+TXV	G*E81155C**	45,500	35,500	14.50	12.00	4323065
	CA*F4860*6D*+TXV	G*E80905C**	45,000	35,100	14.50	12.00	4323064
	CA*F4961*6D*+EEP+TXV		46,000	35,900	14.50	12.00	4431655
	CA*F4961*6D*+MBVC2000**-1A*+TXV		46,000	35,900	15.00	12.50	4431676
	CHPF4860D6D*	G*VM960805DXA*	45,500	35,500	15.00	12.50	4653024
	CHPF4860D6D*	A*VM960805DXA*	45,500	35,500	15.00	12.50	4653023
	CHPF4860D6D*	G*VM960805CXA*	45,500	35,500	15.00	12.50	4653005
	CHPF4860D6D*	A*VM960805CXA*	45,500	35,500	15.00	12.50	4653004
	CHPF4860D6D*	G*VM961005DXA*	45,500	35,500	15.00	12.50	4652992
	CHPF4860D6D*	A*VM961005DXA*	45,500	35,500	15.00	12.50	4652991
	CHPF4860D6D*	G*VM961155DXA*	45,500	35,500	15.00	12.50	4652974
	CHPF4860D6D*	A*VM961155DXA*	45,500	35,500	15.00	12.50	4652973
	CHPF4860D6D*	A*VC90905DXA*	45,500	35,500	15.00	12.50	4588942
	CHPF4860D6D*	G*VC90905DXA*	45,500	35,500	15.00	12.50	4588844
	CHPF4860D6D*	G*VC951155DXA*	45,500	35,500	15.00	12.50	4323074
	CHPF4860D6D*	G*VC950905DXA*	45,500	35,500	15.00	12.50	4323073
	CHPF4860D6D*	G*VC950905CXA*	45,500	35,500	15.00	12.50	4323072
	CHPF4860D6D*	A*VC951155DXA*	45,500	35,500	15.00	12.50	4323071
	CHPF4860D6D*	A*VC950905DXA*	45,500	35,500	15.00	12.50	4323070
	CHPF4860D6D*	A*VC950905CXA*	45,500	35,500	15.00	12.50	4323069
	CHPF4860D6D*+EEP		46,000	35,900	14.00	12.00	4323075
	CHPF4860D6D*+EEP+TXV		46,000	35,900	14.50	12.00	4323076
	CHPF4860D6D*+MBE2000**-1B*		46,000	35,900	15.00	13.00	4323277
	CHPF4860D6D*+MBVC2000**-1A*		46,000	35,900	15.50	13.00	4323077
	CHPF4860D6D*+TXV	ADVC81005C*A*	44,500	34,700	15.00	12.00	4887417
CHPF4860D6D*+TXV	ADVC80805C*A*	44,500	34,700	15.00	12.00	4887416	
CHPF4860D6D*+TXV	A*VC81005C*A*	45,500	35,500	15.00	12.00	4870134	
CHPF4860D6D*+TXV	A*VC80805C*A*	45,500	35,500	15.00	12.00	4870133	
CHPF4860D6D*+TXV	G*VC81005C*A*	45,500	35,500	15.00	12.00	4870130	
CHPF4860D6D*+TXV	G*VC80805C*A*	45,500	35,500	15.00	12.00	4870129	
CHPF4860D6D*+TXV	G*E81005C*A*	45,500	35,500	14.50	12.00	4870128	

See Notes on Page 34.



# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX14 0481B* (cont.)	CHPF4860D6D*+TXV	G*E80805C*A*	45,500	35,500	14.50	12.00	4870127
	CHPF4860D6D*+TXV	GME950805CXA*	45,000	35,100	15.00	12.50	4703758
	CHPF4860D6D*+TXV	GME951005DXA*	45,000	35,100	15.00	12.00	4703690
	CHPF4860D6D*+TXV	G*VC81155CXA*	45,500	35,500	14.50	12.00	4323083
	CHPF4860D6D*+TXV	G*VC80905CXA*	45,500	35,500	15.00	12.00	4323082
	CHPF4860D6D*+TXV	G*E81155C**	45,500	35,500	14.50	12.00	4323081
	CHPF4860D6D*+TXV	G*E80905C**	45,500	35,500	14.50	12.00	4323080
	CHPF4860D6D*+TXV	A*VC81155CXA*	45,500	35,500	14.50	12.00	4323079
	CHPF4860D6D*+TXV	A*VC80905CXA*	45,500	35,500	15.00	12.00	4323078
	CSCF4860N6D*	G*VC951155DXA*	45,500	35,500	14.50	12.30	4767505
	CSCF4860N6D*	G*VC950905DXA*	45,500	35,500	14.50	12.30	4767504
	CSCF4860N6D*	G*VC950905CXA*	45,500	35,500	14.50	12.30	4767503
	CSCF4860N6D*	G*VC81155CXA*	45,500	35,500	14.50	12.00	4767502
	CSCF4860N6D*	G*VC80905CXA*	45,500	35,500	15.00	12.00	4767501
	CSCF4860N6D*	A*VC81155CXA*	45,500	35,500	14.50	12.00	4767500
	CSCF4860N6D*	A*VC80905CXA*	45,500	35,500	15.00	12.00	4767499
CSCF4860N6D*+EEP		46,000	35,900	14.00	12.00	4767506	
SSX14 0601A*	AEPF426016C*		56,000	40,900	14.30	11.70	1492527
	AR*F374316C*		57,000	41,600	13.50	11.50	4358268
	AR*F486016C*		56,000	40,900	13.50	11.50	3896057
	AR*F496116C*		56,000	40,900	13.50	11.50	4358269
	AR*F496116C*+TXV		56,000	40,900	13.50	11.50	4358270
	ASPF426016E*		57,000	41,600	14.50	12.00	4358273
	ASPF426016E*+TXV		56,000	40,900	15.00	12.50	4358274
	AVPTC426014A*		56,000	40,900	15.00	12.50	4431286
	CA*F4860*6D*	G*VM960805DXA*	56,000	40,900	13.50	11.50	4655307
	CA*F4860*6D*	G*VM960805CXA*	56,000	40,900	13.50	11.50	4655301
	CA*F4860*6D*	A*VM960805DXA*	56,000	40,900	13.50	11.50	4653233
	CA*F4860*6D*	A*VM960805CXA*	56,000	40,900	13.50	11.50	4653215
	CA*F4860*6D*	A*VM961005DXA*	56,000	40,900	13.50	11.50	4653190
	CA*F4860*6D*	G*VM961005DXA*	56,000	40,900	13.50	11.50	4653189
	CA*F4860*6D*	A*VM961155DXA*	56,000	40,900	13.50	11.50	4653162
	CA*F4860*6D*	G*VM961155DXA*	56,000	40,900	13.50	11.50	4653161
	CA*F4860*6D*	G*VC950915DXA*	56,000	40,900	13.50	11.50	4588855
	CA*F4860*6D*	G*VC950905DXA*	56,000	40,900	13.50	11.50	4588854
	CA*F4860*6D*	G*VC950905CXA*	56,000	40,900	13.50	11.50	4588853
	CA*F4860*6D*	A*VC950915DXA*	56,000	40,900	13.50	11.50	4201933
	CA*F4860*6D*	A*VC950905CXA*	56,000	40,900	13.50	11.50	4201361
	CA*F4860*6D*	G*VC951155DXA*	56,000	40,900	13.50	11.50	3880261
	CA*F4860*6D*	G*VC90905DXA*	56,000	40,900	13.50	11.50	3880260
	CA*F4860*6D*	A*VC951155DXA*	56,000	40,900	13.50	11.50	3880257
	CA*F4860*6D*	A*VC950905DXA*	56,000	40,900	13.50	11.50	3880256
	CA*F4860*6D*	A*VC90905DXA*	56,000	40,900	13.50	11.50	3880255
	CA*F4860*6D*+EEP		56,000	40,900	14.00	12.00	4945871
	CA*F4860*6D*+MBE2000**-1B*		56,000	40,900	15.00	12.50	3880287
	CA*F4860*6D*+MBR2000**-1		56,000	40,900	14.00	12.00	3880313
	CA*F4860*6D*+MBVC2000**-1A*		56,000	40,900	15.00	12.50	3880331
	CA*F4961*6D*+EEP+TXV		56,000	40,900	14.50	12.00	4431656
	CA*F4961*6D*+TXV	A*VC81005C*A*	57,000	41,600	14.50	12.20	4870152
	CA*F4961*6D*+TXV	A*VC80805C*A*	57,000	41,600	14.50	12.20	4870151
	CA*F4961*6D*+TXV	ADVC81005C*A*	57,000	41,600	14.50	12.20	4870144
	CA*F4961*6D*+TXV	ADVC80805C*A*	57,000	41,600	14.50	12.20	4870143
	CA*F4961*6D*+TXV	G*VC81005C*A*	57,000	41,600	14.50	12.20	4870142
CA*F4961*6D*+TXV	G*VC80805C*A*	57,000	41,600	14.50	12.20	4870141	
CA*F4961*6D*+TXV	G*VC81155CXA*	57,000	41,600	14.50	12.30	4431766	
CA*F4961*6D*+TXV	G*VC80905CXA*	57,000	41,600	14.50	12.30	4431765	

See Notes on Page 34.

# AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	COILS/ AIR HANDLERS/ BLOWERS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
	CA*F4961*6D*+TXV	A*VC81155CXA*	57,000	41,600	14.50	12.30	4431764
	CA*F4961*6D*+TXV	A*VC80905CXA*	57,000	41,600	14.50	12.30	4431763
	CHPF4860D6D*	G*VM960805DXA*	56,000	40,900	13.50	11.50	4653243
	CHPF4860D6D*	A*VM960805DXA*	56,000	40,900	13.50	11.50	4653242
	CHPF4860D6D*	G*VM960805CXA*	56,000	40,900	13.50	11.50	4653225
	CHPF4860D6D*	A*VM960805CXA*	56,000	40,900	13.50	11.50	4653224
	CHPF4860D6D*	G*VM961005DXA*	56,000	40,900	13.50	11.50	4653206
	CHPF4860D6D*	A*VM961005DXA*	56,000	40,900	13.50	11.50	4653205
	CHPF4860D6D*	G*VM961155DXA*	56,000	40,900	13.50	11.50	4653178
	CHPF4860D6D*	A*VM961155DXA*	56,000	40,900	13.50	11.50	4653177
	CHPF4860D6D*	G*VC90905DXA*	56,000	40,900	13.50	11.50	4588857
	CHPF4860D6D*	A*VC950905CXA*	56,000	40,900	13.50	11.50	4201364
	CHPF4860D6D*	G*VC950905CXA*	56,000	40,900	13.50	11.50	4201363
	CHPF4860D6D*	A*VC951155DXA*	56,000	40,900	13.50	11.50	3607317
	CHPF4860D6D*	A*VC950905DXA*	56,000	40,900	13.50	11.50	3607313
	CHPF4860D6D*	A*VC90905DXA*	56,000	40,900	13.50	11.50	3607269
	CHPF4860D6D*	G*VC951155DXA*	56,000	40,900	13.50	11.50	3598956
	CHPF4860D6D*	G*VC950905DXA*	56,000	40,900	13.50	11.50	3598720
SSX14 0601A* (cont.)	CHPF4860D6D*+EEP		56,000	40,900	14.00	12.00	3300080
	CHPF4860D6D*+EEP+TXV		56,000	40,900	14.50	12.00	3367401
	CHPF4860D6D*+MBR2000**-1		56,000	40,900	14.00	12.00	3300162
	CHPF4860D6D*+MBVC2000**-1A*		56,000	40,900	15.00	12.50	4559590
	CHPF4860D6D*+TXV	A*VC81005C*A*	57,000	41,600	14.50	12.20	4870154
	CHPF4860D6D*+TXV	A*VC80805C*A*	57,000	41,600	14.50	12.20	4870153
	CHPF4860D6D*+TXV	ADVC81005C*A*	57,000	41,600	14.50	12.20	4870148
	CHPF4860D6D*+TXV	ADVC80805C*A*	57,000	41,600	14.50	12.20	4870147
	CHPF4860D6D*+TXV	G*VC81005C*A*	57,000	41,600	14.50	12.20	4870146
	CHPF4860D6D*+TXV	G*VC80805C*A*	57,000	41,600	14.50	12.20	4870145
	CHPF4860D6D*+TXV	A*VC81155CXA*	57,000	41,600	14.50	12.30	4216696
	CHPF4860D6D*+TXV	G*VC81155CXA*	57,000	41,600	14.50	12.30	4216694
	CHPF4860D6D*+TXV	A*VC80905CXA*	57,000	41,600	14.50	12.30	4216691
	CHPF4860D6D*+TXV	G*VC80905CXA*	57,000	41,600	14.50	12.30	4216690
	CSCF4860N6D*	G*VC951155DXA*	56,000	40,900	13.50	11.50	4767512
	CSCF4860N6D*	G*VC950905DXA*	56,000	40,900	13.50	11.50	4767511
	CSCF4860N6D*	G*VC950905CXA*	56,000	40,900	13.50	11.50	4767510
	CSCF4860N6D*	A*VC951155DXA*	56,000	40,900	13.50	11.50	4767509
	CSCF4860N6D*	A*VC950905DXA*	56,000	40,900	13.50	11.50	4767508
	CSCF4860N6D*	A*VC950905CXA*	56,000	40,900	13.50	11.50	4767507
CSCF4860N6D*+EEP		56,000	40,900	14.00	11.80	4767513	


<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or what is specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

# SSX14 WIRING DIAGRAM

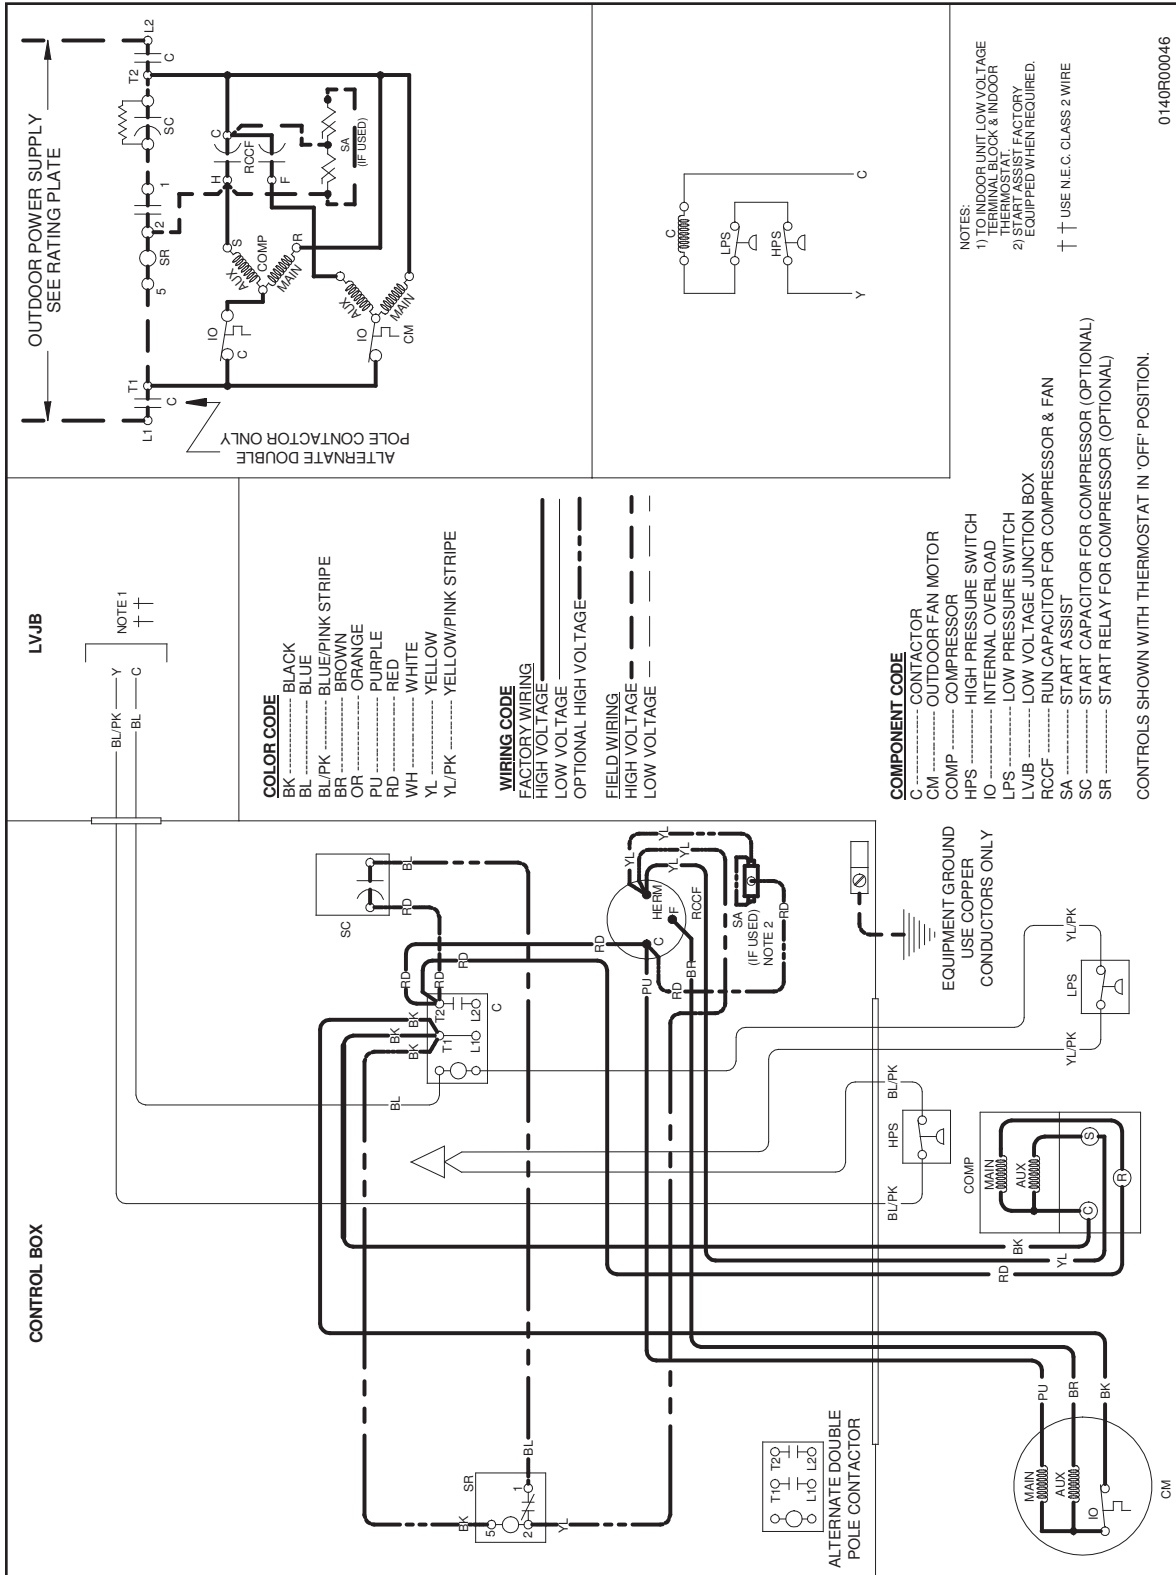


**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

## DIMENSIONS

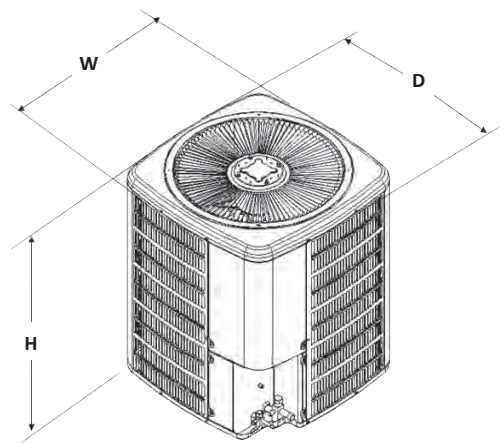

MODEL	DIMENSIONS		
	W"	D"	H"
SSX140181B	26	26	27½
SSX140241B	26	26	32½
SSX140301B	29	29	32½
SSX140361A	29	29	34¼
SSX140361B	29	29	32½
SSX140421B	29	29	38¼
SSX140421C	29	29	36¼
SSX140481A	35½	35½	38¼
SSX140481B	35½	35½	36¼
SSX140601A	35½	35½	38¼

## ACCESSORIES

MODEL	DESCRIPTION	SSX14 018	SSX14 024	SSX14 030	SSX14 036	SSX14 042	SSX14 048	SSX14 060
ABK-20	Anchor Bracket Kit *	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X
LSK01A	Liquid Line Solenoid Kit	X	X	X	X	X	X	X
OT18-60A	Outdoor Thermostat / Lockout Stat	X	X	X	X	X	X	X
TX2N4 <sup>2</sup>	TXV Kit	X						
TX2N4A <sup>2</sup>	TXV Kit	X	X					
TX3N4 <sup>2</sup>	TXV Kit			X	X			
TX5N4 <sup>2</sup>	TXV Kit					X	X	X

\* Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.

