



Air Conditioning & Heating

# GSX14

**HIGH-EFFICIENCY**

**SPLIT SYSTEM**

**AIR CONDITIONER**

**1½ TO 5 TONS**

**COOLING CAPACITY:**

**18,000 TO 56,800 BTU/H**

**UP TO 15 SEER**



### Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency Copeland® scroll compressor
- 850-RPM condenser fan motor
- Factory-installed liquid line filter dryer
- Service valves with sweat connections and gauge ports
- Copper tube/enhanced aluminum fin coil
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

### Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds. (Anchor bracket kits available.)



### Contents

Nomenclature .....	2
Product Specifications .....	3
Expanded Cooling Data .....	4
AHRI Ratings.....	18
Dimensions .....	42
Wiring Diagram.....	43
Accessories .....	44



\* Complete warranty details available from your local dealer or at [www.goodmanmfg.com](http://www.goodmanmfg.com). To receive the 10-Year Compressor Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.



NOMENCLATURE

	<b>G</b>	<b>S</b>	<b>X</b>	<b>14</b>	<b>036</b>	<b>1</b>	<b>A</b>	<b>A</b>		
	<b>1</b>	<b>2</b>	<b>3</b>	<b>4,5</b>	<b>6,7,8</b>	<b>9</b>	<b>10</b>	<b>11</b>		
<b>Brand</b>	G Goodman® (Standard Feature Set Models)									<b>Engineering *</b> Minor Revision
<b>Product Category</b>	S Split System									<b>Engineering *</b> Major Revision
<b>Unit Type</b>	C Condenser R-22 X Condenser R-410A H Heat Pump R-22 Z Heat Pump R-410A								<b>Electrical</b>	
										1 208/230 V, 1 Phase, 60 Hz
										2 220/240 V, 1 Phase, 50 Hz
										3 208/230 V, 3 Phase, 60 Hz
										4 460 V, 3 Phase, 60 Hz
										5 380/415 V, 3 Phase, 50 Hz
<b>Efficiency</b>										<b>Nominal Capacity</b>
13 13 SEER										018 1½ Tons
14 14 SEER										024 2 Tons
16 16 SEER										042 3½ Tons
										048 4 Tons
										030 2½ Tons
										060 5 Tons
										036 3 Tons

\* Neither used for order entry or inventory management.

**Important EnergyStar Notice:** Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit [www.energystar.gov](http://www.energystar.gov).

**SPECIFICATIONS**

	<b>GSX14 0181A</b>	<b>GSX14 0241A</b>	<b>GSX14 0301A</b>	<b>GSX14 0361A</b>	<b>GSX14 0421A</b>	<b>GSX14 0481A</b>	<b>GSX14 0601A</b>
<b>COOLING CAPACITY</b>							
Nominal Cooling (BTU/h)	18,000	24,000	28,800	34,600	40,000	45,000	56,800
Decibels	73	73	74	75	75	76	77
<b>COMPRESSOR</b>							
RLA	9.0	13.4	12.8	14.1	17.9	19.8	26.4
LRA	48.0	58.3	64	77	112.0	109	134
<b>CONDENSER FAN MOTOR</b>							
Horsepower (RPM)	1/6	1/12	1/6	¼	1/6	¼	¼
FLA	1.10	0.60	1.10	1.60	1.00	1.60	1.60
<b>REFRIGERATION SYSTEM</b>							
Refrigerant Line Size <sup>1</sup>							
Liquid Line Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Line Size ("O.D.)	¼"	¼"	¼"	⅞"	1⅛"	1⅛"	1⅛"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Valve Size ("O.D.)	¼"	¼"	¼"	⅞"	⅞"	⅞"	⅞"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	73	91	96	146	167	188	271
Shipped with Orifice Size	0.052	0.055	0.065	0.067	0.074	0.079	0.088
<b>ELECTRICAL DATA</b>							
Voltage-Hz / Phase	208/230-60-1		208/230-60-1		208/230-60-1		
Minimum Circuit Ampacity <sup>2</sup>	12.4	17.5	17.1	19.2	23.4	26.4	34.6
Max. Overcurrent Protection <sup>3</sup>	20	30	30	30	40	40	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"
<b>SHIP WEIGHT (LBS)</b>	146	156	172	199	207	242	280

<sup>1</sup> Tested and rated in accordance with ARI Standard 210/240

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply ⅞" to 1⅛" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of ⅜" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — GSX140181A / CA\*F3636\*6C\*

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	525	MBh	16.7	17.3	18.9	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.5	16.1	17.6	-	14.7	15.3	16.7	-	13.7	14.2	15.5	-
		S/T	0.67	0.56	0.38	-	0.69	0.58	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.76	0.64	0.44	-
		ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-
		kW	2.00	2.03	2.08	-	2.11	2.14	2.19	-	2.20	2.24	2.29	-	2.29	2.33	2.38	-	2.36	2.40	2.46	-	2.42	2.46	2.53	-
		Amps	4.5	4.6	4.7	-	4.8	4.9	5.1	-	5.2	5.3	5.5	-	5.5	5.7	5.8	-	5.9	6.0	6.2	-	6.2	6.3	6.5	-
		Hi PR	208	224	237	-	234	252	266	-	266	286	302	-	303	326	344	-	341	367	387	-	377	405	428	-
	Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-	
	600	MBh	18.1	18.7	20.5	-	17.7	18.3	20.0	-	17.2	17.9	19.6	-	16.8	17.4	19.1	-	16.0	16.6	18.1	-	14.8	15.3	16.8	-
		S/T	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.79	0.66	0.46	-
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-
		kW	2.03	2.07	2.11	-	2.15	2.18	2.23	-	2.25	2.28	2.34	-	2.33	2.37	2.43	-	2.41	2.45	2.51	-	2.47	2.51	2.58	-
		Amps	4.6	4.7	4.8	-	4.9	5.0	5.2	-	5.3	5.4	5.6	-	5.7	5.8	6.0	-	6.0	6.2	6.4	-	6.4	6.5	6.7	-
Hi PR		215	231	244	-	241	260	274	-	274	295	312	-	312	336	355	-	351	378	399	-	388	418	441	-	
Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-		
675	MBh	18.6	19.3	21.1	-	18.2	18.8	20.7	-	17.8	18.4	20.2	-	17.3	18.0	19.7	-	16.5	17.1	18.7	-	15.2	15.8	17.3	-	
	S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	kW	2.05	2.08	2.12	-	2.16	2.19	2.25	-	2.26	2.30	2.35	-	2.35	2.39	2.45	-	2.42	2.46	2.53	-	2.49	2.53	2.59	-	
	Amps	4.6	4.7	4.9	-	5.0	5.1	5.2	-	5.4	5.5	5.7	-	5.7	5.9	6.0	-	6.1	6.2	6.4	-	6.4	6.6	6.8	-	
	Hi PR	217	234	247	-	244	262	277	-	277	298	315	-	315	340	359	-	355	382	403	-	392	422	446	-	
Lo PR	109	116	126	-	115	122	133	-	119	127	139	-	125	133	146	-	131	140	152	-	136	144	158	-		

75	525	MBh	17.0	17.5	18.9	20.3	16.6	17.1	18.5	19.8	16.2	16.7	18.0	19.4	15.8	16.3	17.6	18.9	15.0	15.4	16.7	17.9	13.9	14.3	15.5	16.6	
		S/T	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.87	0.78	0.59	0.38	
		ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	19	16	11
		kW	2.01	2.04	2.09	2.14	2.12	2.15	2.20	2.26	2.22	2.25	2.31	2.37	2.30	2.34	2.40	2.46	2.38	2.42	2.48	2.54	2.44	2.48	2.54	2.61	2.61
		Amps	4.5	4.6	4.7	4.9	4.8	4.9	5.1	5.3	5.2	5.4	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.1	6.2	6.4	6.5	6.3	6.4	6.6	6.8
		Hi PR	211	227	239	250	236	254	269	280	269	289	305	319	306	329	348	363	344	371	391	408	380	409	432	451	
	Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	122	129	141	150	127	136	148	158	132	140	153	163		
	600	MBh	18.4	18.9	20.5	22.0	18.0	18.5	20.0	21.5	17.5	18.0	19.5	21.0	17.1	17.6	19.1	20.5	16.2	16.7	18.1	19.4	15.0	15.5	16.8	18.0	
		S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.81	0.61	0.39	
		ΔT	22	20	17	12	22	21	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11	
		kW	2.05	2.08	2.12	2.17	2.16	2.19	2.25	2.30	2.26	2.30	2.35	2.41	2.35	2.39	2.45	2.51	2.42	2.46	2.53	2.59	2.49	2.53	2.60	2.66	
		Amps	4.6	4.7	4.9	5.0	5.0	5.1	5.2	5.4	5.4	5.5	5.7	5.9	5.7	5.9	6.0	6.3	6.1	6.2	6.4	6.7	6.4	6.6	6.8	7.0	
Hi PR		217	234	247	257	244	262	277	289	277	298	315	328	316	340	359	374	355	382	403	421	392	422	446	465		
Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	145	158	168			
675	MBh	18.9	19.5	21.1	22.6	18.5	19.0	20.6	22.1	18.1	18.6	20.1	21.6	17.6	18.1	19.6	21.1	16.7	17.2	18.6	20.0	15.5	16.0	17.3	18.5		
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.94	0.84	0.64	0.41		
	ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	21	18	15	10		
	kW	2.06	2.09	2.14	2.19	2.17	2.21	2.26	2.31	2.27	2.31	2.37	2.43	2.36	2.40	2.46	2.53	2.44	2.48	2.54	2.61	2.50	2.55	2.61	2.68		
	Amps	4.7	4.8	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.6	6.8	7.1		
	Hi PR	219	236	249	260	246	265	280	292	280	301	318	332	319	343	362	378	359	386	407	425	396	426	450	470		
Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170			

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSX140181A / CA\*F3636\*6C\* (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	525	MBh	17.3	17.6	18.9	20.2	16.9	17.2	18.4	19.7	16.5	16.8	18.0	19.2	16.1	16.4	17.5	18.7	15.3	15.6	16.7	17.8	14.1	14.4	15.4	16.5
		S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.69	0.52	0.94	0.89	0.72	0.54	0.95	0.89	0.73	0.54
		ΔT	25	24	21	17	25	24	21	17	25	24	21	17	26	25	21	17	23	24	21	17	24	23	20	16
		kW	2.02	2.05	2.10	2.15	2.13	2.17	2.22	2.27	2.32	2.27	2.32	2.38	2.32	2.36	2.41	2.48	2.39	2.43	2.49	2.56	2.45	2.50	2.56	2.63
		Amps	4.5	4.6	4.8	4.9	4.9	5.0	5.1	5.3	5.3	5.4	5.6	5.8	5.6	5.8	5.9	6.2	6.0	6.1	6.3	6.5	6.3	6.5	6.7	6.9
		Hi/PR	213	229	242	252	239	257	271	283	271	292	308	322	309	333	351	366	348	374	395	412	384	414	437	455
	Lo/PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165	
	MBh	18.7	19.1	20.4	21.8	18.3	18.7	20.0	21.3	17.8	18.2	19.5	20.8	17.4	17.8	19.0	20.3	16.5	16.9	18.1	19.3	15.3	15.6	16.7	17.9	
	S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	
	ΔT	25	24	21	16	25	24	21	17	25	24	21	17	25	24	21	17	23	24	21	17	23	22	19	15	
	kW	2.06	2.09	2.14	2.19	2.17	2.21	2.26	2.31	2.27	2.31	2.37	2.43	2.36	2.40	2.46	2.53	2.44	2.48	2.54	2.61	2.50	2.55	2.61	2.68	
	Amps	4.7	4.8	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.6	6.9	7.1	
Hi/PR	219	236	249	260	246	265	280	292	280	301	318	332	319	343	362	378	359	386	407	425	396	426	450	470		
Lo/PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170		
MBh	19.3	19.7	21.0	22.5	18.8	19.2	20.5	22.0	18.4	18.8	20.1	21.4	17.9	18.3	19.6	20.9	17.0	17.4	18.6	19.9	15.8	16.1	17.2	18.4		
S/T	0.90	0.85	0.69	0.51	0.93	0.88	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.75	0.56	1.00	0.96	0.78	0.59	1.00	0.97	0.79	0.59		
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15		
kW	2.07	2.10	2.15	2.20	2.19	2.22	2.27	2.33	2.29	2.32	2.38	2.44	2.38	2.42	2.48	2.54	2.45	2.50	2.56	2.63	2.52	2.56	2.63	2.70		
Amps	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.5	5.6	5.8	6.0	5.8	6.0	6.2	6.4	6.2	6.3	6.5	6.8	6.5	6.7	6.9	7.2		
Hi/PR	221	238	252	263	249	267	282	295	283	304	321	335	322	346	366	382	362	390	412	429	400	431	455	474		
Lo/PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	148	158	134	143	156	166	139	147	161	171		

85	525	MBh	17.6	17.9	18.8	20.0	17.2	17.5	18.3	19.5	16.8	17.1	17.9	19.1	16.3	16.7	17.4	18.6	15.5	15.8	16.6	17.7	14.4	14.7	15.4	16.4
		S/T	0.87	0.84	0.76	0.61	0.90	0.87	0.78	0.64	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.96	0.87	0.71
		ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	27	26	25	22	25	25	23	20
		kW	2.03	2.06	2.11	2.16	2.15	2.18	2.23	2.29	2.24	2.28	2.34	2.40	2.33	2.37	2.43	2.49	2.41	2.45	2.51	2.57	2.47	2.51	2.58	2.65
		Amps	4.6	4.7	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	6.4	6.5	6.7	7.0
		Hi/PR	215	231	244	255	241	259	274	286	274	295	312	325	312	336	355	370	351	378	399	416	388	418	441	460
	Lo/PR	108	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166	
	MBh	19.0	19.4	20.3	21.7	18.6	19.0	19.9	21.2	18.2	18.5	19.4	20.7	17.7	18.1	18.9	20.2	16.8	17.1	18.0	19.2	15.6	15.9	16.6	17.7	
	S/T	0.90	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.90	0.73	
	ΔT	26	26	24	21	27	26	25	21	27	26	25	21	27	26	25	22	26	26	25	21	24	24	23	20	
	kW	2.07	2.10	2.15	2.20	2.19	2.22	2.27	2.33	2.29	2.32	2.38	2.44	2.38	2.42	2.48	2.54	2.45	2.50	2.56	2.63	2.52	2.56	2.63	2.70	
	Amps	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.5	5.6	5.8	6.0	5.8	6.0	6.2	6.4	6.2	6.3	6.5	6.8	6.5	6.7	6.9	7.2	
Hi/PR	221	238	252	263	249	267	282	295	283	304	321	335	322	346	366	382	362	390	412	429	400	431	455	474		
Lo/PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	148	158	134	143	156	166	139	147	161	171		
MBh	19.6	20.0	20.9	22.3	19.2	19.5	20.4	21.8	18.7	19.1	20.0	21.3	18.2	18.6	19.5	20.8	17.3	17.7	18.5	19.7	16.1	16.4	17.1	18.3		
S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.77		
ΔT	25	25	23	20	26	25	24	21	25	25	24	21	25	25	24	21	24	24	24	20	22	22	22	19		
kW	2.08	2.11	2.16	2.21	2.20	2.23	2.29	2.34	2.30	2.34	2.40	2.46	2.39	2.43	2.49	2.56	2.47	2.51	2.58	2.64	2.54	2.58	2.65	2.72		
Amps	4.7	4.8	5.0	5.2	5.1	5.2	5.4	5.6	5.5	5.6	5.8	6.0	5.9	6.0	6.2	6.4	6.2	6.4	6.6	6.8	6.6	6.8	7.0	7.2		
Hi/PR	224	241	254	265	251	270	285	298	285	307	324	338	325	350	369	385	366	394	416	434	404	435	459	479		
Lo/PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSX140241A / CA\*F3636\*6C\*

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	23.4	24.2	26.5	-	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.7	22.5	24.7	-	20.7	21.4	23.5	-	19.1	19.8	21.7	-
		S/T	0.65	0.54	0.37	-	0.67	0.56	0.39	-	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.74	0.61	0.43	-	0.74	0.62	0.43
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-
		kW	1.60	1.63	1.68	-	1.72	1.75	1.81	-	1.82	1.86	1.92	-	1.91	1.95	2.02	-	1.99	2.03	2.10	-	2.06	2.10	2.17
	Amps	5.8	6.0	6.2	-	6.3	6.5	6.7	-	6.9	7.0	7.3	-	7.3	7.5	7.8	-	7.8	8.0	8.3	-	8.3	8.5	8.8	-
		Hi PR	233	250	264	-	261	281	297	-	297	320	337	-	338	364	384	-	380	409	432	-	420	452	478
	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-
		MBh	23.6	24.5	26.8	-	23.1	23.9	26.2	-	22.5	23.3	25.6	-	22.0	22.8	24.9	-	20.9	21.6	23.7	-	19.3	20.0	21.9
	S/T	0.65	0.54	0.38	-	0.68	0.56	0.39	-	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.75	0.63	0.43	-
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12
kW	1.62	1.65	1.70	-	1.74	1.77	1.83	-	1.84	1.88	1.94	-	1.93	1.97	2.04	-	2.01	2.06	2.12	-	2.08	2.13	2.19	-	
	Amps	5.9	6.1	6.2	-	6.4	6.5	6.8	-	6.9	7.1	7.3	-	7.4	7.6	7.9	-	7.9	8.1	8.4	-	8.4	8.6	8.9	-
Hi PR	236	254	268	-	265	285	301	-	301	324	342	-	343	369	389	-	385	415	438	-	426	458	484	-	
	Lo PR	106	113	123	-	112	119	130	-	117	124	136	-	123	130	142	-	128	137	149	-	133	141	154	-
MBh	24.4	25.3	27.7	-	23.9	24.7	27.1	-	23.3	24.1	26.5	-	22.7	23.6	25.8	-	21.6	22.4	24.5	-	20.0	20.7	22.7	-	
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-
ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-	
	kW	1.64	1.67	1.72	-	1.76	1.80	1.85	-	1.87	1.91	1.97	-	1.96	2.01	2.07	-	2.04	2.09	2.16	-	2.11	2.16	2.23	-
Amps	6.0	6.2	6.4	-	6.5	6.7	6.9	-	7.1	7.2	7.5	-	7.6	7.7	8.0	-	8.0	8.2	8.5	-	8.5	8.7	9.0	-	
	Hi PR	240	259	273	-	270	290	307	-	307	330	349	-	349	376	397	-	393	423	447	-	434	467	494	-
Lo PR	108	115	126	-	115	122	133	-	119	127	138	-	125	133	145	-	131	139	152	-	136	144	157	-	

75	MBh	23.8	24.5	26.5	28.4	23.2	23.9	25.9	27.8	22.7	23.3	25.3	27.1	22.1	22.8	24.6	26.4	21.0	21.6	23.4	25.1	19.5	20.0	21.7	23.3
		S/T	0.73	0.66	0.50	0.32	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.84	0.75	0.57
	ΔT	23	21	17	12	23	21	17	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11
		kW	1.61	1.64	1.69	1.75	1.73	1.77	1.82	1.88	1.84	1.87	1.93	2.00	1.93	1.97	2.03	2.10	2.01	2.05	2.12	2.19	2.08	2.12	2.19
	Amps	5.9	6.0	6.2	6.5	6.4	6.5	6.7	7.0	6.9	7.1	7.3	7.6	7.4	7.6	7.8	8.1	7.9	8.1	8.3	8.7	8.3	8.5	8.8	9.2
		Hi PR	235	253	267	279	264	284	300	313	300	323	341	356	342	368	388	405	384	414	437	456	425	457	483
	Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	158	133	141	154	164
		MBh	24.0	24.7	26.8	28.7	23.4	24.1	26.1	28.0	22.9	23.6	25.5	27.4	22.3	23.0	24.9	26.7	21.2	21.8	23.6	25.4	19.6	20.2	21.9
	S/T	0.74	0.66	0.50	0.32	0.77	0.69	0.52	0.33	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.76	0.57	0.37	0.85	0.76	0.58	0.37
		ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16
kW	1.63	1.66	1.71	1.77	1.75	1.79	1.84	1.90	1.86	1.89	1.95	2.02	1.95	1.99	2.05	2.12	2.03	2.07	2.14	2.21	2.10	2.14	2.21	2.29	
	Amps	6.0	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.4	8.8	8.4	8.7	8.9	9.3
Hi PR	238	256	271	282	267	288	304	317	304	327	345	360	346	372	393	410	389	419	442	462	430	463	489	510	
	Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	161	134	143	156	166
MBh	24.8	25.6	27.7	29.7	24.3	25.0	27.0	29.0	23.7	24.4	26.4	28.3	23.1	23.8	25.8	27.6	22.0	22.6	24.5	26.3	20.3	20.9	22.7	24.3	
	S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39
ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	19	17	14	10	
	kW	1.65	1.69	1.74	1.79	1.78	1.81	1.87	1.93	1.88	1.92	1.99	2.05	1.98	2.02	2.09	2.16	2.06	2.11	2.17	2.25	2.13	2.18	2.25	2.32
Amps	6.1	6.2	6.4	6.7	6.6	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	
	Hi PR	243	261	276	288	273	293	310	323	310	334	352	367	353	380	401	418	397	427	451	471	439	472	499	520
Lo PR	110	117	127	135	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSX140241A / CA\*F3636\*6C\* (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	700	MBh	24.2	24.7	26.4	28.2	23.6	24.1	25.8	27.6	23.1	23.6	25.2	26.9	22.5	23.0	24.6	26.3	21.4	21.8	23.3	24.9	19.8	20.2	21.6	23.1
		S/T	0.81	0.76	0.61	0.46	0.83	0.78	0.64	0.48	0.86	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.92	0.87	0.71	0.53
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16	
	kW	1.62	1.66	1.71	1.76	1.74	1.78	1.84	1.89	1.85	1.89	1.95	2.01	1.94	1.99	2.05	2.12	2.02	2.07	2.13	2.20	2.09	2.14	2.21	2.28	
	Amps	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.3	
	Hi PR	237	255	270	281	266	287	303	316	303	326	344	359	345	371	392	409	388	418	441	460	429	462	487	508	
	Lo PR	107	114	124	132	113	120	131	140	118	125	137	145	123	131	143	153	129	138	150	160	134	142	155	166	
	MBh	24.4	25.0	26.7	28.5	23.9	24.4	26.1	27.8	23.3	23.8	25.4	27.2	22.7	23.2	24.8	26.5	21.6	22.1	23.6	25.2	20.0	20.4	21.8	23.3	
	S/T	0.81	0.76	0.62	0.46	0.84	0.79	0.64	0.48	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.93	0.88	0.71	0.53	
	ΔT	25	24	21	17	26	24	21	17	26	24	21	17	26	25	21	17	25	24	21	17	24	23	20	16	
kW	1.64	1.67	1.73	1.78	1.76	1.80	1.86	1.91	1.87	1.91	1.97	2.03	1.96	2.01	2.07	2.14	2.05	2.09	2.16	2.23	2.11	2.16	2.23	2.31		
Amps	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.1	7.1	7.2	7.5	7.8	7.6	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.4		
Hi PR	241	259	273	285	270	290	307	320	307	330	349	364	350	376	397	414	393	423	447	466	435	468	494	515		
Lo PR	108	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	139	152	162	136	144	158	168		
MBh	25.3	25.8	27.6	29.5	24.7	25.2	27.0	28.8	24.1	24.6	26.3	28.1	23.5	24.0	25.7	27.5	22.3	22.8	24.4	26.1	20.7	21.2	22.6	24.2		
S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.93	0.76	0.57		
ΔT	22	21	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	21	20	17	14		
kW	1.67	1.70	1.75	1.81	1.79	1.83	1.88	1.94	1.90	1.94	2.00	2.07	2.00	2.04	2.10	2.17	2.08	2.12	2.19	2.26	2.15	2.20	2.27	2.34		
Amps	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.2	7.4	7.6	7.9	7.7	7.9	8.1	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.5		
Hi PR	245	264	279	291	275	296	313	326	313	337	356	371	357	384	405	423	401	432	456	476	443	477	504	525		
Lo PR	111	118	128	137	117	124	136	145	121	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171		

85	700	MBh	24.6	25.1	26.3	28.0	24.0	24.5	25.7	27.4	23.5	23.9	25.1	26.7	22.9	23.3	24.4	26.1	21.7	22.2	23.2	24.8	20.1	20.5	21.5	22.9
		S/T	0.84	0.81	0.73	0.60	0.87	0.84	0.76	0.62	0.90	0.87	0.78	0.63	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.97	0.93	0.84	0.68
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	26	22	26	25	24	21	
	kW	1.64	1.67	1.72	1.77	1.76	1.79	1.85	1.91	1.87	1.90	1.96	2.03	1.96	2.00	2.07	2.13	2.04	2.08	2.15	2.22	2.11	2.16	2.23	2.30	
	Amps	6.0	6.1	6.3	6.6	6.5	6.6	6.9	7.1	7.0	7.2	7.5	7.7	7.5	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.3	
	Hi PR	240	258	272	284	269	290	306	319	306	329	348	363	349	375	396	413	392	422	446	465	433	466	492	513	
	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
	MBh	24.9	25.3	26.5	28.3	24.3	24.7	25.9	27.7	23.7	24.2	25.3	27.0	23.1	23.6	24.7	26.3	22.0	22.4	23.5	25.0	20.3	20.7	21.7	23.2	
	S/T	0.85	0.82	0.74	0.60	0.88	0.85	0.77	0.62	0.91	0.87	0.79	0.64	0.94	0.90	0.81	0.66	0.97	0.94	0.85	0.69	0.98	0.94	0.85	0.69	
	ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	27	27	25	22	25	25	23	20	
kW	1.65	1.69	1.74	1.79	1.78	1.81	1.87	1.93	1.88	1.92	1.99	2.05	1.98	2.02	2.09	2.16	2.06	2.11	2.17	2.25	2.13	2.18	2.25	2.32		
Amps	6.1	6.2	6.4	6.7	6.6	6.7	6.9	7.2	7.1	7.3	7.6	7.8	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5		
Hi PR	243	261	276	288	273	293	310	323	310	334	352	367	353	380	401	419	397	428	451	471	439	472	499	520		
Lo PR	110	117	127	136	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169		
MBh	25.7	26.2	27.5	29.3	25.1	25.6	26.8	28.6	24.5	25.0	26.2	27.9	23.9	24.4	25.5	27.3	22.7	23.2	24.3	25.9	21.1	21.5	22.5	24.0		
S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.73		
ΔT	24	23	22	19	24	24	22	19	24	24	22	19	24	24	23	20	23	23	22	19	22	22	21	18		
kW	1.68	1.71	1.77	1.82	1.80	1.84	1.90	1.96	1.91	1.96	2.02	2.08	2.01	2.06	2.12	2.19	2.10	2.14	2.21	2.28	2.17	2.21	2.29	2.36		
Amps	6.2	6.3	6.5	6.8	6.7	6.8	7.1	7.3	7.3	7.4	7.7	8.0	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.6		
Hi PR	248	267	282	294	278	299	316	330	316	340	359	375	360	388	409	427	405	436	460	480	448	482	509	531		
Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	159	135	144	157	167	140	149	162	173		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.-fan)

EXPANDED COOLING DATA — GSX140301A / CA\*F3642\*6C\*

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	875	MBh	25.3	26.2	28.7	-	24.7	25.6	28.1	-	24.1	25.0	27.4	-	23.5	24.4	26.7	-	22.3	23.2	25.4	-	20.7	21.5	23.5	-	
		S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.79	0.66	0.45	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	1000	kW	1.92	1.96	2.01	-	2.05	2.09	2.15	-	2.17	2.21	2.27	-	2.27	2.31	2.38	-	2.35	2.40	2.47	-	2.43	2.47	2.55	-	
		Amps	6.8	6.9	7.1	-	7.3	7.5	7.7	-	7.9	8.1	8.3	-	8.4	8.6	8.9	-	8.9	9.1	9.4	-	9.4	9.7	10.0	-	
		Hi PR	217	234	247	-	244	262	277	-	277	298	315	-	316	340	359	-	355	382	404	-	393	423	446	-	
	1125	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	148	-	131	140	153	-	
		MBh	27.4	28.4	31.1	-	26.8	27.7	30.4	-	26.1	27.1	29.7	-	25.5	26.4	28.9	-	24.2	25.1	27.5	-	22.4	23.2	25.5	-	
		S/T	0.71	0.59	0.41	-	0.74	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-	
	75	875	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
			kW	1.97	2.00	2.06	-	2.10	2.14	2.20	-	2.22	2.26	2.32	-	2.32	2.36	2.43	-	2.41	2.45	2.53	-	2.48	2.53	2.61	-
			Amps	7.0	7.1	7.3	-	7.5	7.7	7.9	-	8.1	8.3	8.6	-	8.6	8.8	9.1	-	9.2	9.4	9.7	-	9.7	9.9	10.3	-
1000		Hi PR	224	241	255	-	251	271	286	-	286	308	325	-	326	350	370	-	366	394	416	-	405	436	460	-	
		Lo PR	108	115	126	-	115	122	133	-	119	127	138	-	125	133	145	-	131	139	152	-	136	144	157	-	
		MBh	28.2	29.3	32.0	-	27.6	28.6	31.3	-	26.9	27.9	30.6	-	26.3	27.2	29.8	-	24.9	25.8	28.3	-	23.1	23.9	26.2	-	
1125		S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-	
		kW	1.98	2.02	2.07	-	2.11	2.15	2.22	-	2.23	2.28	2.34	-	2.34	2.38	2.45	-	2.42	2.47	2.55	-	2.50	2.55	2.63	-	
75		875	Amps	7.0	7.2	7.4	-	7.6	7.7	8.0	-	8.2	8.4	8.6	-	8.7	8.9	9.2	-	9.3	9.5	9.8	-	9.8	10.0	10.4	-
			Hi PR	226	244	257	-	254	273	289	-	289	311	328	-	329	354	374	-	370	398	420	-	409	440	465	-
			Lo PR	110	116	127	-	116	123	134	-	120	128	140	-	126	134	147	-	132	141	154	-	137	146	159	-
	1000	MBh	25.7	26.5	28.7	30.8	25.1	25.9	28.0	30.0	24.5	25.2	27.3	29.3	23.9	24.6	26.7	28.6	22.7	23.4	25.3	27.2	21.1	21.7	23.5	25.2	
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.89	0.80	0.60	0.39	
		ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10	
	1125	kW	1.94	1.97	2.03	2.09	2.07	2.11	2.17	2.23	2.18	2.23	2.29	2.36	2.28	2.33	2.40	2.47	2.37	2.42	2.49	2.57	2.44	2.49	2.57	2.65	
		Amps	6.8	7.0	7.2	7.5	7.4	7.5	7.8	8.0	8.0	8.2	8.4	8.7	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.9	9.5	9.8	10.1	10.5	
		Hi PR	220	236	249	260	246	265	280	292	280	301	318	332	319	343	363	378	359	386	408	425	397	427	451	470	
	75	875	Lo PR	106	113	123	131	112	119	130	139	117	124	135	144	123	130	142	152	128	137	149	159	133	141	154	164
			MBh	27.9	28.7	31.1	33.3	27.2	28.0	30.3	32.6	26.6	27.4	29.6	31.8	25.9	26.7	28.9	31.0	24.6	25.4	27.4	29.5	22.8	23.5	25.4	27.3
			S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
1000		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	
		kW	1.98	2.02	2.07	2.13	2.11	2.15	2.22	2.28	2.23	2.28	2.34	2.41	2.34	2.38	2.45	2.53	2.43	2.47	2.55	2.63	2.50	2.55	2.63	2.71	
		Amps	7.0	7.2	7.4	7.7	7.6	7.7	8.0	8.3	8.2	8.4	8.6	9.0	8.7	8.9	9.2	9.6	9.3	9.5	9.8	10.2	9.8	10.0	10.4	10.7	
1125		Hi PR	226	244	257	268	254	273	289	301	289	311	328	342	329	354	374	390	370	398	421	439	409	440	465	485	
		Lo PR	110	117	127	135	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169	
		MBh	28.7	29.5	32.0	34.3	28.0	28.9	31.2	33.5	27.4	28.2	30.5	32.7	26.7	27.5	29.8	31.9	25.4	26.1	28.3	30.3	23.5	24.2	26.2	28.1	
75		1000	S/T	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
			ΔT	20	18	15	10	20	18	15	10	20	19	15	10	20	19	15	11	20	18	15	10	19	17	14	10
			kW	1.99	2.03	2.09	2.15	2.13	2.17	2.23	2.30	2.25	2.29	2.36	2.43	2.35	2.40	2.47	2.55	2.44	2.49	2.57	2.65	2.52	2.57	2.65	2.73
	1125	Amps	7.1	7.2	7.5	7.7	7.6	7.8	8.0	8.3	8.3	8.4	8.7	9.0	8.8	9.0	9.3	9.6	9.3	9.6	9.9	10.2	9.9	10.1	10.5	10.8	
		Hi PR	229	246	260	271	257	276	291	304	292	314	331	346	332	358	378	394	374	402	425	443	413	444	469	489	
		Lo PR	111	118	128	137	117	124	136	145	121	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



EXPANDED COOLING DATA — GSX140301A / CA\*F3642\*6C\* (CONT.)

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	26.2	26.7	28.6	30.5	25.6	26.1	27.9	29.8	25.0	25.5	27.2	29.1	24.3	24.9	26.6	28.4	23.1	23.6	25.3	27.0	21.4	21.9	23.4	25.0
		S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.68	0.50	0.91	0.85	0.69	0.52	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75
	ΔT	23	22	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15
		kW	1.95	1.99	2.04	2.10	2.08	2.12	2.18	2.25	2.20	2.24	2.31	2.38	2.30	2.35	2.42	2.49	2.39	2.44	2.51	2.58	2.46	2.51	2.59
	Amps	6.9	7.1	7.3	7.5	7.4	7.6	7.8	8.1	8.0	8.2	8.5	8.8	8.6	8.8	9.1	9.4	9.1	9.3	9.6	10.0	9.6	9.8	10.2	10.5
		Hi PR	222	239	252	263	249	268	283	295	283	305	322	335	322	347	366	382	363	390	412	430	401	431	455
	Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	160	134	143	156	166
		MBh	28.4	29.0	31.0	33.1	27.7	28.3	30.2	32.3	27.0	27.6	29.5	31.6	26.4	27.0	28.8	30.8	25.1	25.6	27.4	29.2	23.2	23.7	25.3
	S/T	0.88	0.83	0.68	0.50	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.78	0.58
		ΔT	23	22	19	15	23	22	19	16	23	22	19	16	24	23	20	16	23	22	19	15	21	21	18
kW	1.99	2.03	2.09	2.15	2.13	2.17	2.23	2.30	2.25	2.29	2.36	2.43	2.35	2.40	2.47	2.55	2.44	2.49	2.57	2.65	2.52	2.57	2.65	2.73	
	Amps	7.1	7.2	7.5	7.7	7.6	7.8	8.0	8.3	8.3	8.4	8.7	9.0	8.8	9.0	9.3	9.6	9.3	9.6	9.9	10.2	9.9	10.1	10.5	10.8
Hi PR	229	246	260	271	257	276	292	304	292	314	332	346	332	358	378	394	374	402	425	443	413	444	469	490	
	Lo PR	111	118	128	137	117	124	136	145	121	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171
MBh	29.2	29.8	31.9	34.1	28.5	29.2	31.1	33.3	27.9	28.5	30.4	32.5	27.2	27.8	29.7	31.7	25.8	26.4	28.2	30.1	23.9	24.4	26.1	27.9	
	S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.61
ΔT	22	21	18	15	22	21	19	15	23	22	19	15	22	22	19	15	21	21	19	15	20	20	17	14	
	kW	2.01	2.05	2.10	2.16	2.14	2.19	2.25	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.49	2.57	2.46	2.51	2.59	2.67	2.54	2.59	2.67	2.75
Amps	7.1	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	8.9	9.1	9.4	9.7	9.4	9.7	10.0	10.3	10.0	10.2	10.5	10.9	
	Hi PR	231	248	262	274	259	279	294	307	295	317	335	349	336	361	381	398	378	406	429	447	417	449	474	494
Lo PR	112	119	130	138	118	126	137	146	123	131	142	152	129	137	150	159	135	144	157	167	140	149	162	173	

85	MBh	26.6	27.1	28.4	30.3	26.0	26.5	27.8	29.6	25.4	25.9	27.1	28.9	24.8	25.3	26.4	28.2	23.5	24.0	25.1	26.8	21.8	22.2	23.3	24.8
		S/T	0.89	0.86	0.78	0.63	0.93	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.89
	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	26	25	24	21	25	25	23	20	23	23	22	19
		kW	1.97	2.00	2.06	2.12	2.10	2.14	2.20	2.26	2.21	2.26	2.32	2.39	2.32	2.36	2.43	2.51	2.41	2.45	2.53	2.60	2.48	2.53	2.61
	Amps	7.0	7.1	7.3	7.6	7.5	7.7	7.9	8.2	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	9.2	9.4	9.7	10.1	9.7	9.9	10.3	10.6
		Hi PR	224	241	255	265	251	270	286	298	286	308	325	339	326	350	370	386	366	394	416	434	405	435	460
	Lo PR	108	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	139	152	162	136	144	157	168
		MBh	28.9	29.4	30.8	32.9	28.2	28.7	30.1	32.1	27.5	28.0	29.4	31.3	26.8	27.4	28.7	30.6	25.5	26.0	27.2	29.0	23.6	24.1	25.2
	S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75
		ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	23	20	23	24	23	20	22	22	22
kW	2.01	2.05	2.10	2.16	2.14	2.19	2.25	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.49	2.57	2.46	2.51	2.59	2.67	2.54	2.59	2.67	2.75	
	Amps	7.1	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	8.9	9.1	9.4	9.7	9.4	9.7	10.0	10.3	10.0	10.2	10.5	10.9
Hi PR	231	248	262	274	259	279	294	307	295	317	335	349	336	361	381	398	378	406	429	447	417	449	474	494	
	Lo PR	112	119	130	138	118	126	137	146	123	131	142	152	129	137	150	159	135	144	157	167	140	149	162	173
MBh	29.7	30.3	31.7	33.9	29.0	29.6	31.0	33.1	28.3	28.9	30.3	32.3	27.6	28.2	29.5	31.5	26.3	26.8	28.0	29.9	24.3	24.8	26.0	27.7	
	S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79
ΔT	24	23	22	19	24	24	22	19	23	24	22	19	23	23	22	19	21	22	22	19	20	20	21	18	
	kW	2.02	2.06	2.12	2.18	2.16	2.20	2.26	2.33	2.28	2.33	2.39	2.47	2.39	2.44	2.51	2.59	2.48	2.53	2.61	2.69	2.56	2.61	2.69	2.78
Amps	7.2	7.4	7.6	7.9	7.8	7.9	8.2	8.5	8.4	8.6	8.9	9.2	9.0	9.2	9.5	9.8	9.5	9.7	10.1	10.4	10.1	10.3	10.6	11.0	
	Hi PR	233	251	265	276	262	282	297	310	298	320	338	353	339	365	385	402	381	410	433	452	421	453	479	499
Lo PR	113	120	131	140	119	127	138	147	124	132	144	153	130	138	151	161	136	145	158	169	141	150	164	175	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSX140361A / CA\*F3642\*6C\*

IDB	Airflow	Outdoor Ambient Temperature																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1353	MBh	34.3	35.6	39.0	-	33.5	34.8	38.1	-	32.7	33.9	37.2	-	31.9	33.1	36.3	-	30.3	31.5	34.5	-	28.1	29.1	31.9	-	
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	
	1200	ΔT	17	15	11	-	18	15	11	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-	
		kW	2.30	2.35	2.41	-	2.46	2.51	2.59	-	2.61	2.66	2.74	-	2.73	2.79	2.88	-	2.84	2.90	2.99	-	2.93	3.00	3.09	-	
	1052	Amps	8.1	8.3	8.6	-	8.8	9.0	9.3	-	9.6	9.8	10.1	-	10.2	10.5	10.8	-	10.9	11.1	11.5	-	11.5	11.8	12.2	-	
		Hi PR	227	245	258	-	255	275	290	-	290	312	330	-	331	356	376	-	372	400	423	-	411	442	467	-	
	75	1353	Lo PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-
			MBh	33.3	34.6	37.9	-	32.6	33.7	37.0	-	31.8	32.9	36.1	-	31.0	32.1	35.2	-	29.5	30.5	33.5	-	27.3	28.3	31.0	-
		1200	S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.81	0.68	0.47	-
			ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
1052		kW	2.29	2.33	2.40	-	2.45	2.49	2.57	-	2.59	2.64	2.72	-	2.71	2.77	2.85	-	2.82	2.88	2.97	-	2.91	2.97	3.06	-	
		Amps	8.1	8.3	8.5	-	8.7	8.9	9.2	-	9.5	9.7	10.0	-	10.1	10.4	10.7	-	10.8	11.0	11.4	-	11.4	11.7	12.1	-	
75		1353	Hi PR	225	242	256	-	253	272	287	-	287	309	327	-	327	352	372	-	368	396	418	-	407	438	462	-
			Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	148	-	132	141	154	-
		1200	MBh	30.8	31.9	34.9	-	30.1	31.1	34.1	-	29.3	30.4	33.3	-	28.6	29.7	32.5	-	27.2	28.2	30.9	-	25.2	26.1	28.6	-
			S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-
	1052	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
		kW	2.24	2.28	2.34	-	2.39	2.44	2.51	-	2.53	2.58	2.66	-	2.65	2.70	2.79	-	2.75	2.81	2.90	-	2.84	2.90	2.99	-	
	75	1353	Amps	7.9	8.0	8.3	-	8.5	8.7	9.0	-	9.2	9.4	9.7	-	9.8	10.1	10.4	-	10.5	10.7	11.1	-	11.1	11.3	11.7	-
			Hi PR	218	235	248	-	245	264	279	-	279	300	317	-	318	342	361	-	357	384	406	-	395	425	449	-
		1200	Lo PR	103	109	119	-	108	115	126	-	113	120	131	-	118	126	137	-	124	132	144	-	128	136	149	-
			MBh	34.92	35.95	38.91	41.76	34.11	35.12	38.01	40.79	33.29	34.28	37.10	39.82	32.48	33.44	36.20	38.85	30.86	31.77	34.39	36.91	28.58	29.43	31.86	34.19
1052		S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.65	0.42	
		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	20	19	17	14	
75		1353	kW	2.32	2.36	2.43	2.51	2.48	2.53	2.61	2.69	2.63	2.68	2.76	2.85	2.76	2.81	2.90	2.99	2.86	2.92	3.01	3.11	2.96	3.02	3.11	3.21
			Amps	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.7	9.6	9.9	10.2	10.6	10.3	10.5	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.8
		1200	Hi PR	230	247	261	272	258	277	293	306	293	316	333	348	334	359	380	396	376	404	427	445	415	447	472	492
			Lo PR	108	115	125	133	114	121	132	141	118	126	138	147	124	132	145	154	130	139	151	161	135	144	157	167
	1052	MBh	33.9	34.9	37.8	40.5	33.1	34.1	36.9	39.6	32.3	33.3	36.0	38.7	31.5	32.5	35.1	37.7	30.0	30.8	33.4	35.8	27.8	28.6	30.9	33.2	
		S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.83	0.62	0.40	
	75	1353	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10
			kW	2.30	2.35	2.42	2.49	2.46	2.51	2.59	2.67	2.61	2.66	2.74	2.83	2.73	2.79	2.88	2.97	2.84	2.90	2.99	3.08	2.93	3.00	3.09	3.19
		1200	Amps	8.1	8.3	8.6	8.9	8.8	9.0	9.3	9.6	9.6	9.8	10.1	10.5	10.2	10.5	10.8	11.2	10.9	11.1	11.5	11.9	11.5	11.8	12.2	12.6
			Hi PR	228	245	259	270	255	275	290	303	290	312	330	344	331	356	376	392	372	400	423	441	411	442	467	487
1052		Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165	
		MBh	31.3	32.2	34.9	37.4	30.6	31.5	34.1	36.6	29.8	30.7	33.2	35.7	29.1	30.0	32.4	34.8	27.7	28.5	30.8	33.1	25.6	26.4	28.5	30.6	
75		1353	S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.89	0.80	0.60	0.39
			ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
		1200	kW	2.25	2.30	2.36	2.43	2.41	2.46	2.53	2.61	2.55	2.60	2.68	2.76	2.67	2.73	2.81	2.90	2.78	2.83	2.92	3.01	2.86	2.92	3.02	3.11
			Amps	7.9	8.1	8.4	8.7	8.6	8.8	9.1	9.4	9.3	9.5	9.8	10.2	9.9	10.2	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.5	11.8	12.3
	1052	Hi PR	221	237	251	262	248	266	281	293	282	303	320	334	321	345	365	380	361	388	410	428	399	429	453	473	
		Lo PR	104	110	120	128	109	116	127	135	114	121	132	141	120	127	139	148	125	133	145	155	130	138	150	160	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSX140361A / CA\*F3642\*6C\* (CONT.)

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature																																																																
		65°F						75°F						85°F						95°F						105°F						115°F																																														
		59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79																																									
80	1353	MBh	35.54	36.31	38.80	41.47	34.71	35.47	37.90	40.51	33.89	34.63	36.99	39.55	33.06	33.78	36.09	38.58	31.41	32.09	34.29	36.65	29.09	29.73	31.76	33.95	S/T	0.92	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.81	0.61	ΔT	22	21	19	15	23	22	19	15	23	22	19	15	21	22	22	19	15	21	22	20	19	15	20	20	17	14
		kW	2.34	2.38	2.45	2.52	2.50	2.55	2.63	2.71	2.65	2.70	2.78	2.87	2.78	2.83	2.92	3.01	2.89	2.95	3.04	3.13	2.98	3.04	3.14	3.24	Amps	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.8	9.7	10.0	10.3	10.7	10.4	10.6	11.0	11.4	11.1	11.3	11.7	12.2	11.7	12.0	12.4	12.9	Lo PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	169		
		MBh	34.5	35.3	37.7	40.3	33.7	34.4	36.8	39.3	32.9	33.6	35.9	38.4	32.1	32.8	35.0	37.5	30.5	31.2	33.3	35.6	28.2	28.9	30.8	33.0	S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58	ΔT	23	22	19	16	24	23	20	16	24	23	20	16	24	23	20	16	23	22	20	16	22	21	18	15		
	kW	2.32	2.36	2.43	2.51	2.48	2.53	2.61	2.69	2.63	2.68	2.76	2.85	2.76	2.81	2.90	2.99	2.86	2.92	3.01	3.11	2.96	3.02	3.11	3.21	Amps	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.7	9.6	9.9	10.2	10.6	10.3	10.6	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.8	Lo PR	230	247	261	272	258	278	293	306	293	316	333	348	334	359	380	396	376	404	427	445	415	447	472	492			
	MBh	31.8	32.5	34.8	37.2	31.1	31.8	34.0	36.3	30.4	31.0	33.1	35.4	29.6	30.3	32.3	34.6	28.1	28.8	30.7	32.8	26.1	26.6	28.5	30.4	S/T	0.85	0.80	0.65	0.48	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.91	0.74	0.56	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15			
	kW	2.27	2.31	2.38	2.45	2.43	2.48	2.55	2.63	2.57	2.62	2.70	2.78	2.69	2.75	2.83	2.92	2.80	2.85	2.94	3.04	2.89	2.95	3.04	3.14	Amps	8.0	8.2	8.5	8.8	8.6	8.8	9.1	9.5	9.4	9.6	9.9	10.3	10.0	10.3	10.6	11.0	10.7	10.9	11.3	11.7	11.3	11.6	11.9	12.4	Lo PR	223	240	253	264	250	269	284	296	284	306	323	337	324	349	368	384	365	392	414	432	403	433	458	477			
	MBh	36.16	36.86	38.60	41.18	35.32	36.00	37.71	40.23	34.48	35.14	36.81	39.27	33.64	34.29	35.91	38.31	31.95	32.57	34.11	36.40	29.60	30.17	31.60	33.71	S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75	ΔT	24	23	22	19	24	24	22	19	23	24	22	19	23	23	23	20	22	22	22	20	22	21	21	18			
	kW	2.35	2.40	2.47	2.54	2.52	2.57	2.65	2.73	2.67	2.72	2.81	2.89	2.80	2.86	2.94	3.04	2.91	2.97	3.06	3.16	3.00	3.07	3.16	3.27	Amps	8.4	8.6	8.8	9.2	9.0	9.3	9.6	9.9	9.8	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.2	11.4	11.8	12.3	11.8	12.1	12.5	13.0	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170			
	MBh	35.1	35.8	37.5	40.0	34.3	35.0	36.6	39.1	33.5	34.1	35.7	38.1	32.7	33.3	34.9	37.2	31.0	31.6	33.1	35.3	28.7	29.3	30.7	32.7	S/T	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	24	20	24	24	23	20	22	22	22	19			
	kW	2.34	2.38	2.45	2.52	2.50	2.55	2.63	2.71	2.65	2.70	2.78	2.87	2.78	2.83	2.92	3.01	2.89	2.95	3.04	3.13	2.98	3.04	3.14	3.24	Amps	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.8	9.7	10.0	10.3	10.7	10.4	10.6	11.0	11.4	11.1	11.3	11.7	12.2	11.7	12.0	12.4	12.9	Lo PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	169			
	MBh	32.4	33.0	34.6	36.9	31.6	32.3	33.8	36.0	30.9	31.5	33.0	35.2	30.1	30.7	32.2	34.3	28.6	29.2	30.6	32.6	26.5	27.0	28.3	30.2	S/T	0.89	0.86	0.78	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72	ΔT	25	25	23	20	26	25	24	21	26	25	24	21	26	25	24	21	25	25	24	20	23	23	22	19			
	kW	2.29	2.33	2.40	2.47	2.45	2.49	2.57	2.65	2.59	2.64	2.72	2.80	2.71	2.77	2.85	2.94	2.82	2.88	2.97	3.06	2.91	2.97	3.06	3.16	Amps	8.1	8.3	8.5	8.8	8.7	8.9	9.2	9.6	9.5	9.7	10.0	10.4	10.1	10.4	10.7	11.1	10.8	11.0	11.4	11.8	11.4	11.7	12.1	12.5	Lo PR	106	112	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	148	158	132	141	154	164			

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.-fan)

EXPANDED COOLING DATA — GSX140421A\* / CA\*F4860\*6B\*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1225	MBh	35.1	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.0	32.2	35.2	-	28.8	29.8	32.7	-	
		S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	1450	kW	2.06	2.11	2.18	-	2.23	2.29	2.37	-	2.39	2.45	2.53	-	2.52	2.59	2.68	-	2.64	2.70	2.80	-	2.74	2.81	2.91	-	
		Amps	8.8	9.0	9.3	-	9.5	9.7	10.0	-	10.3	10.5	10.9	-	11.0	11.3	11.6	-	11.7	12.0	12.4	-	12.4	12.7	13.1	-	
		Hi PR	224	242	255	-	252	271	286	-	286	308	326	-	326	351	371	-	367	395	417	-	406	436	461	-	
	1575	Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-	
		MBh	38.1	39.4	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	35.4	36.7	40.2	-	33.6	34.9	38.2	-	31.2	32.3	35.4	-	
		S/T	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.45	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-	
	75	1225	ΔT	17	15	11	-	18	15	11	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-
			kW	2.11	2.16	2.24	-	2.29	2.35	2.43	-	2.45	2.51	2.60	-	2.60	2.66	2.75	-	2.71	2.78	2.88	-	2.82	2.89	2.99	-
			Amps	9.0	9.2	9.5	-	9.7	10.0	10.3	-	10.6	10.8	11.2	-	11.3	11.6	12.0	-	12.0	12.3	12.7	-	12.8	13.1	13.5	-
1450		Hi PR	231	249	263	-	260	279	295	-	295	318	336	-	336	362	382	-	378	407	430	-	418	450	475	-	
		Lo PR	111	118	129	-	117	125	136	-	122	129	141	-	128	136	148	-	134	143	156	-	139	147	161	-	
		MBh	38.4	39.8	43.6	-	37.5	38.9	42.6	-	36.6	38.0	41.6	-	35.8	37.1	40.6	-	34.0	35.2	38.6	-	31.5	32.6	35.7	-	
1575		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.49	-	
		ΔT	16	14	11	-	17	14	11	-	17	14	11	-	17	14	11	-	16	14	11	-	15	13	10	-	
		kW	2.12	2.17	2.25	-	2.30	2.36	2.44	-	2.46	2.52	2.61	-	2.60	2.67	2.76	-	2.72	2.79	2.89	-	2.83	2.89	3.00	-	
75		1225	Amps	9.0	9.2	9.6	-	9.8	10.0	10.3	-	10.6	10.9	11.2	-	11.3	11.6	12.0	-	12.1	12.4	12.8	-	12.8	13.1	13.6	-
			Hi PR	232	250	264	-	260	280	296	-	296	319	337	-	337	363	383	-	380	408	431	-	419	451	476	-
			Lo PR	111	118	129	-	117	125	136	-	122	130	142	-	128	136	149	-	134	143	156	-	139	148	161	-
	1450	MBh	35.7	36.8	39.8	42.7	34.9	35.9	38.9	41.7	34.1	35.1	38.0	40.7	33.2	34.2	37.0	39.7	31.6	32.5	35.2	37.8	29.2	30.1	32.6	35.0	
		S/T	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
		ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	20	16	11	20	18	15	10	
	1575	kW	2.08	2.13	2.20	2.28	2.25	2.31	2.39	2.47	2.41	2.47	2.56	2.65	2.55	2.61	2.70	2.80	2.67	2.73	2.83	2.93	2.77	2.83	2.94	3.04	
		Amps	8.8	9.1	9.4	9.7	9.6	9.8	10.1	10.5	10.4	10.6	11.0	11.4	11.1	11.4	11.8	12.2	11.8	12.1	12.5	13.0	12.5	12.8	13.3	13.8	
		Hi PR	227	244	258	269	254	274	289	302	289	311	329	343	330	355	375	391	371	399	421	439	410	441	466	486	
	75	1225	Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	145	155	131	140	152	162	136	144	158	168
			MBh	38.7	39.8	43.1	46.3	37.8	38.9	42.1	45.2	36.9	38.0	41.1	44.1	36.0	37.1	40.1	43.1	34.2	35.2	38.1	40.9	31.7	32.6	35.3	37.9
			S/T	0.81	0.73	0.55	0.35	0.84	0.76	0.57	0.37	0.87	0.77	0.59	0.38	0.89	0.80	0.60	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41
1450		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	19	17	14	10	
		kW	2.13	2.18	2.26	2.34	2.32	2.37	2.45	2.54	2.48	2.54	2.63	2.72	2.62	2.68	2.78	2.88	2.74	2.81	2.91	3.01	2.84	2.91	3.02	3.13	
		Amps	9.1	9.3	9.6	10.0	9.8	10.1	10.4	10.8	10.7	10.9	11.3	11.7	11.4	11.7	12.1	12.5	12.2	12.5	12.9	13.4	12.9	13.2	13.6	14.2	
1575		Hi PR	234	252	266	277	262	282	298	311	298	321	339	354	340	366	386	403	382	411	434	453	422	454	480	501	
		Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173	
		MBh	39.1	40.2	43.6	46.8	38.2	39.3	42.5	45.7	37.3	38.4	41.5	44.6	36.4	37.4	40.5	43.5	34.5	35.6	38.5	41.3	32.0	32.9	35.7	38.3	
1575		S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.95	0.85	0.64	0.41	0.95	0.85	0.65	0.42	
		ΔT	19	17	14	10	19	18	14	10	19	18	14	10	19	18	14	10	19	18	14	10	18	16	13	9	
		kW	2.14	2.19	2.27	2.35	2.32	2.38	2.46	2.55	2.48	2.54	2.63	2.73	2.63	2.69	2.79	2.89	2.75	2.81	2.92	3.02	2.85	2.92	3.03	3.14	
1575	Amps	9.1	9.3	9.6	10.0	9.9	10.1	10.4	10.8	10.7	11.0	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.2	13.7	14.2		
	Hi PR	234	252	266	278	263	283	299	312	299	322	340	355	341	367	387	404	383	413	436	454	424	456	481	502		
	Lo PR	112	119	130	139	119	126	138	147	123	131	143	153	130	138	150	160	136	144	158	168	140	149	163	174		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (ITVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSX140421A\* / CA\*F4860\*6B\* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1225	MBh	36.4	37.1	39.7	42.4	35.5	36.3	38.8	41.4	34.7	35.4	37.8	40.5	33.8	34.6	36.9	39.5	32.1	32.8	35.1	37.5	29.8	30.4	32.5	34.7
		S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15	
	kW	2.10	2.14	2.22	2.30	2.27	2.33	2.41	2.50	2.43	2.49	2.58	2.67	2.57	2.63	2.73	2.83	2.69	2.75	2.85	2.96	2.79	2.86	2.96	3.07	
	Amps	8.9	9.1	9.4	9.8	9.6	9.9	10.2	10.6	10.5	10.7	11.1	11.5	11.2	11.5	11.9	12.3	11.9	12.2	12.6	13.1	12.6	12.9	13.4	13.9	
	Hi PR	229	246	260	271	257	277	292	305	292	315	332	346	333	358	378	395	375	403	426	444	414	445	470	490	
	Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	
	MBh	39.4	40.2	43.0	46.0	38.5	39.3	42.0	44.9	37.6	38.4	41.0	43.8	36.6	37.4	40.0	42.8	34.8	35.6	38.0	40.6	32.2	32.9	35.2	37.6	
	S/T	0.89	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	0.96	0.78	0.59	
	ΔT	22	21	19	15	23	22	19	15	23	22	19	15	23	22	19	15	22	22	19	15	20	20	17	14	
1450	1450	kW	2.15	2.20	2.28	2.36	2.34	2.39	2.48	2.57	2.50	2.56	2.65	2.75	2.64	2.71	2.80	2.91	2.77	2.83	2.93	3.04	2.87	2.94	3.05	3.16
		Amps	9.2	9.4	9.7	10.1	9.9	10.2	10.5	10.9	10.8	11.0	11.4	11.8	11.5	11.8	12.2	12.7	12.3	12.6	13.0	13.5	13.0	13.3	13.8	14.3
	Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	485	506	
	Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	152	161	137	145	159	169	141	150	164	175	
	MBh	39.8	40.7	43.4	46.4	38.9	39.7	42.4	45.3	37.9	38.8	41.4	44.3	37.0	37.8	40.4	43.2	35.2	35.9	38.4	41.0	32.6	33.3	35.6	38.0	
	S/T	0.91	0.85	0.70	0.52	0.94	0.89	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.60	
	ΔT	21	20	18	14	21	21	18	14	21	21	18	14	22	21	18	14	21	20	17	14	19	19	17	13	
	kW	2.16	2.21	2.29	2.37	2.34	2.40	2.48	2.57	2.51	2.57	2.66	2.75	2.65	2.71	2.81	2.91	2.77	2.84	2.94	3.05	2.88	2.95	3.06	3.17	
	Amps	9.2	9.4	9.7	10.1	9.9	10.2	10.5	10.9	10.8	11.1	11.4	11.9	11.6	11.8	12.2	12.7	12.3	12.6	13.0	13.5	13.0	13.4	13.8	14.3	
	Hi PR	237	255	269	281	266	286	302	315	302	325	343	358	344	370	391	408	387	417	440	459	428	460	486	507	
Lo PR	113	121	132	140	120	127	139	148	125	133	145	154	131	139	152	162	137	146	159	170	142	151	165	175		

1225	1225	MBh	37.0	37.7	39.5	42.1	36.1	36.8	38.6	41.2	35.3	36.0	37.7	40.2	34.4	35.1	36.7	39.2	32.7	33.3	34.9	37.2	30.3	30.9	32.3	34.5
		S/T	0.90	0.87	0.79	0.64	0.94	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.90	0.73
	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	26	25	24	21	25	25	23	20	23	23	22	19	
	kW	2.11	2.16	2.24	2.32	2.29	2.35	2.43	2.52	2.45	2.51	2.60	2.70	2.59	2.66	2.75	2.85	2.71	2.78	2.88	2.99	2.82	2.89	2.99	3.10	
	Amps	9.0	9.2	9.5	9.9	9.7	10.0	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.6	12.0	12.4	12.0	12.3	12.7	13.2	12.8	13.1	13.5	14.0	
	Hi PR	231	249	263	274	260	279	295	308	295	318	335	350	336	362	382	399	378	407	430	448	418	450	475	495	
	Lo PR	111	118	129	137	117	125	136	145	122	129	141	150	128	136	148	158	134	142	156	166	139	147	161	171	
	MBh	40.1	40.9	42.8	45.6	39.1	39.9	41.8	44.6	38.2	39.0	40.8	43.5	37.3	38.0	39.8	42.5	35.4	36.1	37.8	40.3	32.8	33.4	35.0	37.4	
	S/T	0.94	0.90	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.94	0.76	
	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	24	24	23	20	22	23	22	19	21	21	21	18	
1450	1450	kW	2.17	2.22	2.30	2.38	2.36	2.41	2.50	2.59	2.52	2.58	2.67	2.77	2.67	2.73	2.83	2.93	2.79	2.86	2.96	3.07	2.90	2.97	3.07	3.19
		Amps	9.3	9.5	9.8	10.2	10.0	10.3	10.6	11.0	10.9	11.1	11.5	11.9	11.6	11.9	12.3	12.8	12.4	12.7	13.1	13.6	13.1	13.4	13.9	14.4
	Hi PR	238	257	271	283	268	288	304	317	304	328	346	361	347	373	394	411	390	420	443	462	431	464	490	511	
	Lo PR	114	122	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	177	
	MBh	40.5	41.3	43.2	46.1	39.5	40.3	42.2	45.0	38.6	39.3	41.2	44.0	37.7	38.4	40.2	42.9	35.8	36.5	38.2	40.7	33.1	33.8	35.4	37.7	
	S/T	0.96	0.92	0.83	0.67	0.99	0.96	0.86	0.70	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77	
	ΔT	23	22	21	18	23	22	21	18	23	22	21	18	22	22	21	19	21	21	21	18	19	20	20	17	
	kW	2.18	2.23	2.31	2.39	2.36	2.42	2.51	2.60	2.53	2.59	2.68	2.78	2.67	2.74	2.84	2.94	2.80	2.87	2.97	3.08	2.90	2.98	3.08	3.20	
	Amps	9.3	9.5	9.8	10.2	10.0	10.3	10.6	11.0	10.9	11.2	11.5	12.0	11.7	11.9	12.3	12.8	12.4	12.7	13.1	13.7	13.2	13.5	13.9	14.5	
	Hi PR	239	257	272	284	268	289	305	318	305	328	347	362	348	374	395	412	391	421	444	464	432	465	491	512	
Lo PR	115	122	133	142	121	129	141	150	126	134	146	156	132	141	153	163	138	147	161	171	143	152	166	177		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSX140481A\* / CA\*F4860\*6D\* / 0.078 ORIFICE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-
	S/T	0.76	0.63	0.44	-	0.78	0.66	0.45	-	0.80	0.67	0.47	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
	kW	3.04	3.10	3.19	-	3.25	3.32	3.42	-	3.44	3.51	3.62	-	3.61	3.69	3.80	-	3.75	3.83	3.95	-	3.88	3.96	4.08	-
	Amps	10.8	11.1	11.5	-	11.7	12.1	12.5	-	12.9	13.2	13.7	-	13.8	14.2	14.7	-	14.8	15.2	15.7	-	15.7	16.2	16.8	-
	Hi PR	223	240	253	-	250	269	284	-	284	306	323	-	324	349	368	-	365	392	414	-	403	433	458	-
	Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-
	MBh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-
	S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-
kW	3.01	3.07	3.16	-	3.23	3.29	3.39	-	3.42	3.49	3.59	-	3.58	3.66	3.77	-	3.72	3.80	3.92	-	3.85	3.93	4.05	-	
Amps	10.7	10.9	11.3	-	11.6	11.9	12.4	-	12.7	13.1	13.5	-	13.7	14.1	14.6	-	14.6	15.0	15.6	-	15.6	16.0	16.6	-	
Hi PR	221	238	251	-	248	267	281	-	282	303	320	-	321	345	365	-	361	388	410	-	399	429	453	-	
Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-	
MBh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-	
S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	
ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	
kW	2.95	3.01	3.09	-	3.16	3.22	3.31	-	3.34	3.41	3.51	-	3.50	3.57	3.68	-	3.64	3.71	3.83	-	3.76	3.83	3.95	-	
Amps	10.3	10.6	11.0	-	11.3	11.6	12.0	-	12.4	12.7	13.1	-	13.3	13.6	14.1	-	14.2	14.6	15.1	-	15.1	15.5	16.1	-	
Hi PR	214	230	243	-	240	259	273	-	273	294	310	-	311	335	354	-	350	377	398	-	387	416	440	-	
Lo PR	102	109	119	-	108	115	125	-	112	119	130	-	118	125	137	-	124	131	143	-	128	136	148	-	

75	MBh	45.8	47.2	51.1	54.8	44.8	46.1	49.9	53.6	43.7	45.0	48.7	52.3	42.6	43.9	47.5	51.0	40.5	41.7	45.1	48.5	37.5	38.6	41.8	44.9
	S/T	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.91	0.82	0.62	0.40	0.94	0.84	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.88	0.67	0.43
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	18	15
	kW	3.06	3.12	3.21	3.31	3.28	3.34	3.44	3.55	3.47	3.54	3.65	3.76	3.64	3.71	3.83	3.95	3.78	3.86	3.98	4.11	3.91	3.99	4.12	4.25
	Amps	10.9	11.2	11.6	12.1	11.9	12.2	12.6	13.1	13.0	13.3	13.8	14.4	14.0	14.3	14.9	15.5	14.9	15.3	15.9	16.6	15.9	16.3	16.9	17.6
	Hi PR	225	242	256	267	253	272	287	300	287	309	327	341	327	352	372	388	368	396	418	436	407	438	462	482
	Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166
	MBh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6
	S/T	0.82	0.73	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.93	0.84	0.63	0.41	0.94	0.84	0.64	0.41
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	22	20	19	15
kW	3.04	3.10	3.19	3.28	3.25	3.32	3.42	3.52	3.44	3.51	3.62	3.73	3.61	3.69	3.80	3.92	3.75	3.83	3.95	4.08	3.88	3.96	4.08	4.21	
Amps	10.8	11.1	11.5	11.9	11.7	12.1	12.5	13.0	12.9	13.2	13.7	14.2	13.8	14.2	14.7	15.3	14.8	15.2	15.7	16.4	15.8	16.2	16.8	17.4	
Hi PR	223	240	253	264	250	269	284	297	285	306	323	337	324	349	368	384	365	392	414	432	403	434	458	477	
Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165	
MBh	41.1	42.3	45.8	49.1	40.1	41.3	44.7	48.0	39.2	40.3	43.7	46.8	38.2	39.3	42.6	45.7	36.3	37.4	40.5	43.4	33.6	34.6	37.5	40.2	
S/T	0.79	0.71	0.54	0.34	0.82	0.73	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.81	0.62	0.40	
ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	23	21	17	12	22	21	19	16	
kW	2.97	3.03	3.12	3.21	3.18	3.24	3.34	3.44	3.36	3.43	3.54	3.65	3.53	3.60	3.71	3.83	3.67	3.74	3.86	3.98	3.79	3.86	3.99	4.11	
Amps	10.5	10.7	11.1	11.6	11.4	11.7	12.1	12.6	12.5	12.8	13.3	13.8	13.4	13.8	14.3	14.9	14.4	14.7	15.3	15.9	15.3	15.7	16.3	16.9	
Hi PR	216	233	246	256	243	261	276	288	276	297	314	327	314	338	357	373	354	381	402	419	391	421	444	463	
Lo PR	103	110	120	128	109	116	127	135	113	121	132	140	119	127	138	147	125	133	145	154	129	137	150	160	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — GSX140481A\* / CA\*F4860\*6D\* / 0.078 ORIFICE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	46.7	47.7	50.9	54.4	45.6	46.6	49.7	53.2	44.5	45.5	48.6	51.9	43.4	44.3	47.4	50.6	41.2	42.1	45.0	48.1	38.2	39.0	41.7	44.6
	S/T	0.94	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62
	ΔT	23	22	19	15	24	22	20	16	23	22	20	16	23	23	20	16	22	22	19	15	20	21	18	14
	kW	3.08	3.14	3.23	3.33	3.30	3.37	3.47	3.58	3.50	3.57	3.68	3.79	3.67	3.74	3.86	3.98	3.81	3.89	4.02	4.14	3.94	4.02	4.15	4.28
	Amps	11.0	11.3	11.7	12.2	12.0	12.3	12.7	13.3	13.1	13.5	14.0	14.5	14.1	14.5	15.0	15.6	15.1	15.5	16.1	16.7	16.1	16.5	17.1	17.8
	Hi PR	227	245	258	270	255	275	290	303	290	312	330	344	331	356	376	392	372	400	423	441	411	442	467	487
	Lo PR	109	116	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168
	MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3
	S/T	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.97	0.79	0.59
	ΔT	24	23	20	16	24	23	20	16	25	23	20	16	25	24	21	17	24	23	20	16	22	22	19	15
kW	3.06	3.12	3.21	3.31	3.28	3.34	3.44	3.55	3.47	3.54	3.65	3.76	3.64	3.72	3.83	3.95	3.78	3.86	3.98	4.11	3.91	3.99	4.12	4.25	
Amps	10.9	11.2	11.6	12.1	11.9	12.2	12.6	13.1	13.0	13.3	13.8	14.4	14.0	14.3	14.9	15.5	14.9	15.3	15.9	16.6	15.9	16.3	16.9	17.6	
Hi PR	225	242	256	267	253	272	287	300	287	309	327	341	327	352	372	388	368	396	419	436	407	438	462	482	
Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166	
MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9	
S/T	0.87	0.81	0.66	0.50	0.90	0.84	0.69	0.51	0.92	0.87	0.70	0.53	0.95	0.89	0.73	0.54	0.99	0.93	0.75	0.56	1.00	0.93	0.76	0.57	
ΔT	25	24	21	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	15	
kW	2.99	3.05	3.14	3.23	3.20	3.27	3.36	3.47	3.29	3.36	3.46	3.56	3.67	3.55	3.63	3.74	3.86	3.69	3.77	3.89	4.01	3.82	3.90	4.02	
Amps	10.6	10.8	11.2	11.7	11.5	11.8	12.2	12.7	12.6	12.9	13.4	14.0	13.6	13.9	14.4	15.0	14.5	14.9	15.4	16.1	15.4	15.8	16.4	17.1	
Hi PR	218	235	248	259	245	264	279	291	279	300	317	330	318	342	361	376	357	384	406	423	395	425	449	468	
Lo PR	104	111	121	129	110	117	128	136	114	122	133	142	120	128	140	149	126	134	146	156	130	139	151	161	

85	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3
	S/T	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80
	ΔT	25	24	23	20	24	25	23	20	24	24	23	20	23	24	23	20	22	22	22	20	20	21	22	19
	kW	3.10	3.17	3.26	3.36	3.33	3.39	3.50	3.60	3.52	3.60	3.71	3.82	3.70	3.77	3.89	4.01	3.84	3.92	4.05	4.18	3.97	4.06	4.18	4.32
	Amps	11.1	11.4	11.8	12.3	12.1	12.4	12.9	13.4	13.3	13.6	14.1	14.7	14.3	14.6	15.2	15.8	15.2	15.7	16.2	16.9	16.2	16.7	17.3	18.0
	Hi PR	230	247	261	272	258	277	293	306	293	316	333	348	334	359	379	396	376	404	427	445	415	447	472	492
	Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	126	135	147	156	133	141	154	164	137	146	159	170
	MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0
	S/T	0.94	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.77
	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	25	26	24	21	24	25	24	21	22	23	23	20
kW	3.08	3.14	3.23	3.33	3.30	3.37	3.47	3.58	3.50	3.57	3.68	3.79	3.67	3.74	3.86	3.98	3.81	3.89	4.02	4.14	3.94	4.02	4.15	4.28	
Amps	11.0	11.3	11.7	12.2	12.0	12.3	12.7	13.3	13.1	13.5	14.0	14.5	14.1	14.5	15.0	15.6	15.1	15.5	16.1	16.7	16.1	16.5	17.1	17.8	
Hi PR	227	245	258	270	255	275	290	303	290	312	330	344	331	356	376	392	372	400	423	441	411	442	467	487	
Lo PR	109	116	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7	
S/T	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.67	0.97	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74	
ΔT	26	26	25	21	27	26	25	21	27	26	25	21	27	26	25	22	26	26	25	21	24	24	23	20	
kW	3.01	3.07	3.16	3.26	3.23	3.29	3.39	3.49	3.42	3.49	3.59	3.70	3.58	3.66	3.77	3.89	3.72	3.80	3.92	4.04	3.85	3.93	4.05	4.18	
Amps	10.7	10.9	11.3	11.8	11.6	11.9	12.4	12.9	12.7	13.1	13.5	14.1	13.7	14.1	14.6	15.2	14.6	15.0	15.6	16.2	15.6	16.0	16.6	17.3	
Hi PR	221	237	251	262	248	266	281	293	282	303	320	334	321	345	364	380	361	388	410	428	399	429	453	472	
Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSX140601A\* / CA\*F4860D6A\* / .088 ORIFICE

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	2025	MBh	54.9	56.9	62.3	-	53.6	55.6	60.9	-	52.3	54.2	59.4	-	51.0	52.9	58.0	-	48.5	50.3	55.1	-	44.9	46.6	51.0	-
		S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-
	1800	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
		kW	4.04	4.13	4.25	-	4.35	4.44	4.58	-	4.61	4.71	4.86	-	4.85	4.95	5.11	-	5.05	5.16	5.33	-	5.22	5.34	5.51	-
	1575	Amps	14.5	14.8	15.3	-	15.6	16.0	16.6	-	17.0	17.4	18.0	-	18.2	18.7	19.3	-	21.3	21.8	22.6	-	22.5	23.1	23.8	-
		Hi PR	249	268	272	-	274	294	298	-	320	344	349	-	365	392	398	-	411	441	448	-	474	510	517	-
	1800	Lo PR	117	120	132	-	120	124	135	-	124	128	140	-	128	132	144	-	130	134	147	-	133	138	150	-
		MBh	53.3	55.2	60.5	-	52.0	53.9	59.1	-	50.8	52.7	57.7	-	49.6	51.4	56.3	-	47.1	48.8	53.5	-	43.6	45.2	49.5	-
	1575	S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
1800	kW	4.01	4.09	4.22	-	4.31	4.40	4.54	-	4.58	4.67	4.82	-	4.81	4.91	5.07	-	5.01	5.12	5.29	-	5.18	5.30	5.47	-	
	Amps	14.3	14.7	15.2	-	15.5	15.9	16.4	-	16.9	17.3	17.9	-	18.1	18.5	19.1	-	21.1	21.6	22.4	-	22.3	22.8	23.6	-	
1575	Hi PR	247	265	269	-	271	291	296	-	317	341	346	-	361	388	394	-	406	437	443	-	470	505	512	-	
	Lo PR	116	119	130	-	119	123	134	-	123	127	139	-	126	130	142	-	129	133	145	-	132	136	149	-	
1800	MBh	49.2	51.0	55.8	-	48.0	49.8	54.5	-	46.9	48.6	53.2	-	45.7	47.4	51.9	-	43.5	45.0	49.3	-	40.3	41.7	45.7	-	
	S/T	0.66	0.55	0.38	-	0.68	0.57	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.75	0.63	0.44	-	
1575	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	12	-	18	15	12	-	
	kW	3.98	4.06	4.19	-	4.28	4.37	4.50	-	4.54	4.64	4.78	-	4.77	4.87	5.03	-	4.97	5.08	5.24	-	5.14	5.25	5.42	-	
1800	Amps	14.2	14.5	15.0	-	15.4	15.7	16.3	-	16.7	17.1	17.7	-	17.9	18.3	19.0	-	20.9	21.4	22.2	-	22.1	22.6	23.4	-	
	Hi PR	244	263	266	-	268	288	293	-	314	338	342	-	358	385	390	-	402	433	439	-	465	500	507	-	
1575	Lo PR	114	118	129	-	118	122	133	-	122	126	137	-	125	129	141	-	128	132	144	-	131	135	147	-	

75	2025	MBh	55.8	57.5	62.2	66.7	54.5	56.1	60.7	65.2	53.2	54.8	59.3	63.6	51.9	53.4	57.9	62.1	49.3	50.8	55.0	59.0	45.7	47.0	50.9	54.6
		S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.83	0.63	0.40	0.93	0.83	0.63	0.41
	1800	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
		kW	4.04	4.13	4.25	4.39	4.35	4.44	4.58	4.72	4.61	4.71	4.86	5.02	4.85	4.95	5.11	5.28	5.05	5.16	5.33	5.51	5.22	5.34	5.51	5.70
	1575	Amps	14.5	14.8	15.3	15.9	15.6	16.0	16.6	17.2	17.0	17.4	18.0	18.7	18.2	18.7	19.3	20.1	21.3	21.8	22.6	23.5	22.5	23.1	23.8	24.8
		Hi PR	249	268	272	278	274	294	298	305	320	344	349	357	365	392	398	407	411	441	448	458	474	510	517	529
	1800	Lo PR	117	120	132	140	120	124	135	144	124	128	140	149	128	132	144	153	130	134	147	156	133	138	150	160
		MBh	54.2	55.8	60.4	64.8	52.9	54.5	59.0	63.3	51.7	53.2	57.6	61.8	50.4	51.9	56.2	60.3	47.9	49.3	53.4	57.3	44.4	45.7	49.4	53.0
	1575	S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.89	0.79	0.60	0.39
		ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	19	15	10
1800	kW	4.01	4.09	4.22	4.35	4.31	4.40	4.54	4.69	4.58	4.67	4.82	4.98	4.81	4.91	5.07	5.24	5.01	5.12	5.29	5.46	5.18	5.30	5.47	5.65	
	Amps	14.3	14.7	15.2	15.7	15.5	15.9	16.4	17.0	16.9	17.3	17.9	18.6	18.1	18.5	19.1	19.9	21.1	21.6	22.4	23.2	22.3	22.8	23.6	24.5	
1575	Hi PR	247	265	269	275	271	291	296	302	317	341	346	354	361	388	394	403	406	437	443	453	470	505	512	523	
	Lo PR	116	119	130	139	119	123	134	143	123	127	139	148	126	130	142	152	129	133	145	155	132	136	149	158	
1800	MBh	50.0	51.5	55.7	59.8	48.8	50.3	54.4	58.4	47.7	49.1	53.1	57.0	46.5	47.9	51.8	55.6	44.2	45.5	49.3	52.9	40.9	42.1	45.6	49.0	
	S/T	0.75	0.67	0.51	0.32	0.77	0.69	0.52	0.34	0.79	0.71	0.54	0.35	0.82	0.73	0.55	0.36	0.85	0.76	0.58	0.37	0.86	0.77	0.58	0.37	
1575	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	17	11	20	19	15	11	
	kW	3.98	4.06	4.19	4.32	4.28	4.37	4.50	4.65	4.54	4.64	4.78	4.94	4.77	4.87	5.03	5.20	4.97	5.08	5.24	5.41	5.14	5.25	5.42	5.60	
1800	Amps	14.2	14.5	15.0	15.6	15.4	15.7	16.3	16.9	16.7	17.1	17.7	18.4	17.9	18.3	19.0	19.7	20.9	21.4	22.2	23.0	22.1	22.6	23.4	24.3	
	Hi PR	244	263	266	272	268	288	293	299	314	338	342	350	358	385	390	399	402	433	439	448	465	500	507	518	
1575	Lo PR	114	118	129	137	118	122	133	141	122	126	137	146	125	129	141	150	128	132	144	153	131	135	147	157	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



EXPANDED COOLING DATA — GSX140601A\* / CA\*F4860D6A\* / .088 ORIFICE (CONT.)

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	2025	MBh	56.8	58.0	62.0	66.3	55.5	56.7	60.6	64.7	54.2	55.3	59.1	63.2	52.8	54.0	57.7	61.7	50.2	51.3	54.8	58.6	46.5	47.5	50.8	54.3
		S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.53	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58
	ΔT	23	22	19	15	23	22	19	15	24	22	20	16	24	22	20	16	23	22	19	15	21	21	18	14	
	kW	4.04	4.13	4.25	4.39	4.35	4.44	4.58	4.72	4.61	4.71	4.86	5.02	4.85	4.95	5.11	5.28	5.05	5.16	5.33	5.51	5.22	5.34	5.51	5.70	
	Amps	14.5	14.8	15.3	15.9	15.6	16.0	16.6	17.2	17.0	17.4	18.0	18.7	18.2	18.7	19.3	20.1	21.3	21.8	22.6	23.5	22.5	23.1	23.8	24.8	
	Hi PR	249	268	272	278	274	294	298	305	320	344	349	357	365	392	398	407	411	441	448	458	474	510	517	529	
	Lo PR	117	120	132	140	120	124	135	144	124	128	140	149	128	132	144	153	130	134	147	156	133	138	150	160	
	MBh	55.1	56.3	60.2	64.4	53.9	55.0	58.8	62.9	52.6	53.7	57.4	61.4	51.3	52.4	56.0	59.9	48.7	49.8	53.2	56.9	45.1	46.1	49.3	52.7	
	S/T	0.85	0.80	0.65	0.48	0.88	0.82	0.67	0.50	0.90	0.85	0.69	0.51	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.97	0.91	0.74	0.56	
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	22	19	15	
1575	2025	MBh	4.01	4.09	4.22	4.35	4.31	4.40	4.54	4.69	4.58	4.67	4.82	4.98	4.81	4.91	5.07	5.24	5.01	5.12	5.29	5.46	5.18	5.30	5.47	5.65
		Amps	14.3	14.7	15.2	15.7	15.5	15.9	16.4	17.0	16.9	17.3	17.9	18.6	18.1	18.5	19.1	19.9	21.1	21.6	22.4	23.2	22.3	22.8	23.6	24.5
	Hi PR	247	265	269	275	271	291	296	302	317	341	346	354	361	388	394	403	406	437	443	453	470	505	512	523	
	Lo PR	116	119	130	139	119	123	134	143	123	127	139	148	126	130	142	152	129	133	145	155	132	136	149	158	
	MBh	50.9	52.0	55.6	59.4	49.7	50.8	54.3	58.0	48.5	49.6	53.0	56.6	47.3	48.4	51.7	55.3	45.0	46.0	49.1	52.5	41.7	42.6	45.5	48.6	
	S/T	0.82	0.77	0.62	0.47	0.85	0.80	0.65	0.48	0.87	0.82	0.66	0.50	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.94	0.88	0.72	0.54	
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	24	23	20	16	23	22	19	15	
	kW	3.98	4.06	4.19	4.32	4.28	4.37	4.50	4.65	4.54	4.64	4.78	4.94	4.77	4.87	5.03	5.20	4.97	5.08	5.24	5.41	5.14	5.25	5.42	5.60	
	Amps	14.2	14.5	15.0	15.6	15.4	15.7	16.3	16.9	16.7	17.1	17.7	18.4	17.9	18.3	19.0	19.7	20.9	21.4	22.2	23.0	22.1	22.6	23.4	24.3	
	Hi PR	244	263	266	272	268	288	293	299	314	338	342	350	358	385	390	399	402	433	439	448	465	500	507	518	
Lo PR	114	118	129	137	118	122	133	141	122	126	137	146	125	129	141	150	128	132	144	153	131	135	147	157		

85	2025	MBh	57.8	58.9	61.7	65.8	56.4	57.5	60.3	64.3	55.1	56.2	58.8	62.8	53.8	54.8	57.4	61.2	51.1	52.1	54.5	58.2	47.3	48.2	50.5	53.9
		S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76
	ΔT	24	24	23	20	25	24	23	20	25	24	23	20	24	25	23	20	24	23	20	16	21	22	21	19	
	kW	4.04	4.13	4.25	4.39	4.35	4.44	4.58	4.72	4.61	4.71	4.86	5.02	4.85	4.95	5.11	5.28	5.05	5.16	5.33	5.51	5.22	5.34	5.51	5.70	
	Amps	14.5	14.8	15.3	15.9	15.6	16.0	16.6	17.2	17.0	17.4	18.0	18.7	18.2	18.7	19.3	20.1	21.3	21.8	22.6	23.5	22.5	23.1	23.8	24.8	
	Hi PR	249	268	272	278	274	294	298	305	320	344	349	357	365	392	398	407	411	441	448	458	474	510	517	529	
	Lo PR	117	120	132	140	120	124	135	144	124	128	140	149	128	132	144	153	130	134	147	156	133	138	150	160	
	MBh	56.1	57.2	59.9	63.9	54.8	55.9	58.5	62.4	53.5	54.5	57.1	60.9	52.2	53.2	55.7	59.4	49.6	50.5	52.9	56.5	45.9	46.8	49.0	52.3	
	S/T	0.89	0.86	0.77	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72	
	ΔT	25	25	24	21	26	25	24	21	26	25	24	21	26	26	24	21	25	25	24	21	23	24	22	19	
1575	2025	MBh	4.01	4.09	4.22	4.35	4.31	4.40	4.54	4.69	4.58	4.67	4.82	4.98	4.81	4.91	5.07	5.24	5.01	5.12	5.29	5.46	5.18	5.30	5.47	5.65
		Amps	14.3	14.7	15.2	15.7	15.5	15.9	16.4	17.0	16.9	17.3	17.9	18.6	18.1	18.5	19.1	19.9	21.1	21.6	22.4	23.2	22.3	22.8	23.6	24.5
	Hi PR	247	265	269	275	271	291	296	302	317	341	346	354	361	388	394	403	406	437	443	453	470	505	512	523	
	Lo PR	116	119	130	139	119	123	134	143	123	127	139	148	126	130	142	152	129	133	145	155	132	136	149	158	
	MBh	51.8	52.8	55.3	59.0	50.6	51.6	54.0	57.6	49.4	50.3	52.7	56.2	48.2	49.1	51.4	54.9	45.8	46.7	48.9	52.1	42.4	43.2	45.3	48.3	
	S/T	0.86	0.83	0.75	0.61	0.89	0.86	0.77	0.63	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.66	0.98	0.94	0.85	0.69	0.98	0.95	0.86	0.70	
	ΔT	26	26	24	21	26	26	24	21	26	26	24	21	26	26	25	21	26	26	24	21	24	24	23	20	
	kW	3.98	4.06	4.19	4.32	4.28	4.37	4.50	4.65	4.54	4.64	4.78	4.94	4.77	4.87	5.03	5.20	4.97	5.08	5.24	5.41	5.14	5.25	5.42	5.60	
	Amps	14.2	14.5	15.0	15.6	15.4	15.7	16.3	16.9	16.7	17.1	17.7	18.4	17.9	18.3	19.0	19.7	20.9	21.4	22.2	23.0	22.1	22.6	23.4	24.3	
	Hi PR	244	263	266	272	268	288	293	299	314	338	342	350	358	385	390	399	402	433	439	448	465	500	507	518	
Lo PR	114	118	129	137	118	122	133	141	122	126	137	146	125	129	141	150	128	132	144	153	131	135	147	157		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.-fan)

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0181A*	AEPF183016C*+TXV		18,000	13,500	15.00	12.50	4100769
	AR*F193116B*+TXV		18,000	13,500	14.00	12.00	4100781
	AR*F193116C*+TXV		18,000	13,500	14.00	12.00	4261909
	ASPF183016B*+TXV		18,000	13,500	15.00	12.50	4100797
	ASPF183016C*+TXV		18,000	13,500	15.00	12.50	4244347
	ASPF183016D*+TXV		18,000	13,500	15.00	12.50	4518773
	ASPF183016E*+TXV		18,000	13,500	15.00	12.50	4518774
	AT*F193116A*+TXV		18,000	13,500	14.00	12.00	4100807
	AVPTC183014A*		18,000	13,500	15.00	12.50	4518775
	AWUF31XX16A*		17,400	13,100	14.50	12.00	4100813
	AWUF32XX16A*		17,400	13,100	14.50	12.00	4518776
	CA*F1824*6B*	A*VC950453BXA*	17,000	12,800	14.00	12.00	4589217
	CA*F1824*6B*	G*VC950453BXA*	17,000	12,800	14.00	12.00	4588996
	CA*F1824*6D*	GME950403BXA*	17,000	12,800	14.00	12.00	4701039
	CA*F1824*6D*	G*VM960603BXA*	17,000	12,800	14.00	12.00	4655204
	CA*F1824*6D*	A*VM960603BXA*	17,000	12,800	14.00	12.00	4655203
	CA*F1824*6D*	A*VC950453BXA*	17,000	12,800	14.00	12.00	4589218
	CA*F1824*6D*	G*VC950453BXA*	17,000	12,800	14.00	12.00	4588997
	CA*F3131*6B*	MBE1200**-1B*+TXV	18,400	13,800	15.00	12.50	4588999
	CA*F3131*6B*+EEP+TXV		18,000	13,500	14.00	12.00	4588998
	CA*F3131*6B*+TXV	GME950603BXA*	17,900	13,400	15.00	12.50	4703575
	CA*F3131*6B*+TXV	G*VM960603BXA*	18,400	13,800	15.00	12.50	4655209
	CA*F3131*6B*+TXV	A*VM960603BXA*	18,400	13,800	15.00	12.50	4655208
	CA*F3131*6B*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4655207
	CA*F3131*6B*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4655206
	CA*F3131*6B*+TXV	A*VC950714CXA*	18,000	13,500	15.00	12.50	4589222
	CA*F3131*6B*+TXV	A*VC950704CXA*	18,000	13,500	15.00	12.50	4589221
	CA*F3131*6B*+TXV	A*VC950453BXA*	18,400	13,800	15.00	12.50	4589220
	CA*F3131*6B*+TXV	A*VC90704CXA*	18,000	13,500	15.00	12.50	4589219
	CA*F3131*6B*+TXV	G*E80703B**	18,400	13,800	15.00	12.50	4589004
	CA*F3131*6B*+TXV	G*VC950714CXA*	18,000	13,500	15.00	12.50	4589003
	CA*F3131*6B*+TXV	G*VC950704CXA*	18,000	13,500	15.00	12.50	4589002
	CA*F3131*6B*+TXV	G*VC950453BXA*	18,400	13,800	15.00	12.50	4589001
	CA*F3131*6B*+TXV	G*VC90704CXA*	18,000	13,500	15.00	12.50	4589000
	CA*F3131*6C*	MBVC1200**-1A*+TXV	18,400	13,800	15.00	12.50	4100821
	CA*F3131*6C*	MBE1200**-1B*+TXV	18,400	13,800	15.00	12.50	4100820
	CA*F3131*6C*+EEP+TXV		18,000	13,500	14.00	12.00	4100819
	CA*F3131*6C*+TXV	GME950603BXA*	17,900	13,400	15.00	12.50	4703578
	CA*F3131*6C*+TXV	G*VM960603BXA*	18,400	13,800	15.00	12.50	4652041
	CA*F3131*6C*+TXV	A*VM960603BXA*	18,400	13,800	15.00	12.50	4652040
	CA*F3131*6C*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4652014
	CA*F3131*6C*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4652013
CA*F3131*6C*+TXV	A*VC80704BXA*	18,400	13,800	15.00	12.50	4589223	
CA*F3131*6C*+TXV	G*VC80704BXA*	18,400	13,800	15.00	12.50	4589011	
CA*F3131*6C*+TXV	G*VC90704CXA*	18,000	13,500	15.00	12.50	4589008	

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or what is specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0181A* (cont.)	CA*F3131*6C*+TXV	G*VC950714CXA*	18,000	13,500	15.00	12.50	4518778
	CA*F3131*6C*+TXV	A*VC950714CXA*	18,000	13,500	15.00	12.50	4518777
	CA*F3131*6C*+TXV	G*VC950704CXA*	18,000	13,500	15.00	12.50	4100697
	CA*F3131*6C*+TXV	G*VC950453BXA*	18,400	13,800	15.00	12.50	4100684
	CA*F3131*6C*+TXV	G*E80703B**	18,400	13,800	15.00	12.50	4100520
	CA*F3131*6C*+TXV	A*VC950704CXA*	18,000	13,500	15.00	12.50	4100454
	CA*F3131*6C*+TXV	A*VC950453BXA*	18,400	13,800	15.00	12.50	4100442
	CA*F3131*6C*+TXV	A*VC90704CXA*	18,000	13,500	15.00	12.50	4100416
	CA*F3131*6D*	MBVC1200** -1A*+TXV	18,400	13,800	15.00	12.50	4518780
	CA*F3131*6D*+EEP+TXV		18,000	13,500	14.00	12.00	4518779
	CA*F3131*6D*+TXV	GME950603BXA*	18,000	13,500	15.00	12.50	4701051
	CA*F3131*6D*+TXV	GME950403BXA*	18,400	13,800	15.00	12.50	4701049
	CA*F3131*6D*+TXV	G*VM960603BXA*	18,400	13,800	15.00	12.50	4652045
	CA*F3131*6D*+TXV	A*VM960603BXA*	18,400	13,800	15.00	12.50	4652044
	CA*F3131*6D*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4652020
	CA*F3131*6D*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4652019
	CA*F3131*6D*+TXV	A*VC80704BXA*	18,400	13,800	15.00	12.50	4589224
	CA*F3131*6D*+TXV	G*VC80704BXA*	18,400	13,800	15.00	12.50	4589013
	CA*F3131*6D*+TXV	G*VC90704CXA*	18,000	13,500	15.00	12.50	4589012
	CA*F3131*6D*+TXV	G*VC950714CXA*	18,000	13,500	15.00	12.50	4518787
	CA*F3131*6D*+TXV	G*VC950704CXA*	18,000	13,500	15.00	12.50	4518786
	CA*F3131*6D*+TXV	G*VC950453BXA*	18,400	13,800	15.00	12.50	4518785
	CA*F3131*6D*+TXV	A*VC950714CXA*	18,000	13,500	15.00	12.50	4518784
	CA*F3131*6D*+TXV	A*VC950704CXA*	18,000	13,500	15.00	12.50	4518783
	CA*F3131*6D*+TXV	A*VC950453BXA*	18,400	13,800	15.00	12.50	4518782
	CA*F3131*6D*+TXV	A*VC90704CXA*	18,000	13,500	15.00	12.50	4518781
	CA*F3636*6C*	MBVC1200** -1A*+TXV	18,400	13,800	15.00	12.50	4100827
	CA*F3636*6C*	MBE1200** -1B*+TXV	18,400	13,800	15.00	12.50	4100825
	CA*F3636*6C*+EEP+TXV		18,000	13,500	14.00	12.00	4100823
	CA*F3636*6D*	MBVC1200** -1A*+TXV	18,400	13,800	15.00	12.50	4518789
	CA*F3636*6D*+EEP		18,000	13,500	13.80	11.80	4696192
	CA*F3636*6D*+EEP+TXV		18,000	13,500	14.00	12.00	4518788
	CA*F3743*6A*+EEP+TXV		18,400	13,800	14.50	12.20	4100834
	CA*F3743*6A*+TXV	GME950603BXA*	17,900	13,400	15.00	12.50	4703581
	CA*F3743*6A*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4652025
	CA*F3743*6A*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4652024
	CA*F3743*6A*+TXV	G*VM960603BXA*	18,000	13,500	15.00	12.50	4651994
	CA*F3743*6A*+TXV	A*VM960603BXA*	18,000	13,500	15.00	12.50	4651993
	CA*F3743*6A*+TXV	G*VC90704CXA*	18,000	13,500	15.00	12.50	4589014
	CA*F3743*6A*+TXV	G*VC950714CXA*	18,000	13,500	15.00	12.50	4518791
	CA*F3743*6A*+TXV	A*VC950714CXA*	18,000	13,500	15.00	12.50	4518790
	CA*F3743*6A*+TXV	G*VC950704CXA*	18,000	13,500	15.00	12.50	4100705
	CA*F3743*6A*+TXV	G*VC950453BXA*	18,000	13,500	15.00	12.50	4100687
	CA*F3743*6A*+TXV	A*VC950704CXA*	18,000	13,500	15.00	12.50	4100463
	CA*F3743*6A*+TXV	A*VC950453BXA*	18,000	13,500	15.00	12.50	4100446
	CA*F3743*6A*+TXV	A*VC90704CXA*	18,000	13,500	15.00	12.50	4100423
	CA*F3743*6D*+EEP+TXV		18,400	13,800	14.50	12.20	4518792
	CA*F3743*6D*+TXV	GME950603BXA*	18,000	13,500	15.00	12.50	4701073
	CA*F3743*6D*+TXV	GME950403BXA*	18,000	13,500	15.00	12.50	4701068
	CA*F3743*6D*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4652029
CA*F3743*6D*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4652028	
CA*F3743*6D*+TXV	G*VM960603BXA*	18,000	13,500	15.00	12.50	4651999	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0181A* (cont.)	CA*F3743*6D*+TXV	A*VM960603BXA*	18,000	13,500	15.00	12.50	4651998
	CA*F3743*6D*+TXV	G*VC90704CXA*	18,000	13,500	15.00	12.50	4594164
	CA*F3743*6D*+TXV	G*VC950714CXA*	18,000	13,500	15.00	12.50	4518799
	CA*F3743*6D*+TXV	G*VC950704CXA*	18,000	13,500	15.00	12.50	4518798
	CA*F3743*6D*+TXV	G*VC950453BXA*	18,000	13,500	15.00	12.50	4518797
	CA*F3743*6D*+TXV	A*VC950714CXA*	18,000	13,500	15.00	12.50	4518796
	CA*F3743*6D*+TXV	A*VC950704CXA*	18,000	13,500	15.00	12.50	4518795
	CA*F3743*6D*+TXV	A*VC950453BXA*	18,000	13,500	15.00	12.50	4518794
	CA*F3743*6D*+TXV	A*VC90704CXA*	18,000	13,500	15.00	12.50	4518793
	CHPF2430B6C*	MBVC1200** -1A*+TXV	18,000	13,500	15.00	12.50	4100862
	CHPF2430B6C*	MBE1200** -1B*+TXV	18,000	13,500	15.00	12.50	4100861
	CHPF2430B6C*+EEP+TXV		18,000	13,500	14.00	12.00	4100860
	CHPF2430B6C*+TXV	GME950403BXA*	18,000	13,500	15.00	12.50	4701105
	CHPF2430B6C*+TXV	A*VM960604CXA*	18,000	13,500	15.00	12.50	4652035
	CHPF2430B6C*+TXV	G*VM960604CXA*	18,000	13,500	15.00	12.50	4652033
	CHPF2430B6C*+TXV	G*VM960603BXA*	18,000	13,500	15.00	12.50	4652003
	CHPF2430B6C*+TXV	A*VM960603BXA*	18,000	13,500	15.00	12.50	4652002
	CHPF2430B6C*+TXV	A*VC80704BXA*	18,000	13,500	15.00	12.50	4589226
	CHPF2430B6C*+TXV	G*VC80704BXA*	18,000	13,500	15.00	12.50	4589021
	CHPF2430B6C*+TXV	G*VC950453BXA*	18,000	13,500	15.00	12.50	4100690
	CHPF2430B6C*+TXV	G*E80703B**	18,000	13,500	15.00	12.50	4100522
	CHPF2430B6C*+TXV	A*VC950453BXA*	18,000	13,500	15.00	12.50	4100449
	CHPF3636B6C*+EEP		18,000	13,500	13.80	11.80	4696193
	CHPF3636B6C*+EEP+TXV		18,400	13,800	14.50	12.20	4100865
	CSCF3036N6B*+EEP+TXV		18,400	13,800	14.00	12.00	4100892
	CSCF3036N6B*+TXV	GME950603BXA*	18,400	13,800	15.00	12.50	4701136
	CSCF3036N6B*+TXV	GME950403BXA*	18,400	13,800	15.00	12.50	4701134
	CSCF3036N6B*+TXV	G*VM960604CXA*	18,400	13,800	15.00	12.50	4652055
	CSCF3036N6B*+TXV	A*VM960604CXA*	18,400	13,800	15.00	12.50	4652054
	CSCF3036N6B*+TXV	A*VM960603BXA*	18,400	13,800	15.00	12.50	4652051
	CSCF3036N6B*+TXV	G*VM960603BXA*	18,400	13,800	15.00	12.50	4652050
	CSCF3036N6B*+TXV	A*VC80704BXA*	18,400	13,800	15.00	12.50	4589227
	CSCF3036N6B*+TXV	G*VC80704BXA*	18,400	13,800	15.00	12.50	4589025
	CSCF3036N6B*+TXV	G*VC90704CXA*	18,400	13,800	15.00	12.50	4589022
	CSCF3036N6B*+TXV	G*VC950704CXA*	18,400	13,800	15.00	12.50	4100720
	CSCF3036N6B*+TXV	G*VC950453BXA*	18,400	13,800	15.00	12.50	4100694
	CSCF3036N6B*+TXV	G*E80703B**	18,400	13,800	15.00	12.50	4100525
	CSCF3036N6B*+TXV	A*VC950704CXA*	18,400	13,800	15.00	12.50	4100480
	CSCF3036N6B*+TXV	A*VC950453BXA*	18,400	13,800	15.00	12.50	4100453
	CSCF3036N6B*+TXV	A*VC90704CXA*	18,400	13,800	15.00	12.50	4100431
	CSCF3642N6C*+EEP		18,000	13,500	13.80	11.80	4696194
	CSCF3642N6C*+EEP+TXV		18,400	13,800	14.50	12.20	4100894
	CSCF3642N6D*+EEP+TXV		18,400	13,800	14.50	12.00	4767435
GSX14 0241A*	AEPF313716A*		24,000	17,800	15.00	12.50	4100770
	AR*F193116B*		24,000	17,800	14.00	12.00	4100779
	AR*F193116C*		24,000	17,800	14.00	12.00	4260513
	ASPF313716C*		24,000	17,800	15.00	12.50	4589029
	ASPF313716D*		24,000	17,800	15.00	12.50	4589030
	ASPF313716E*		24,000	17,800	15.00	12.50	4589031
	AT*F193116A*		24,000	17,800	14.00	12.00	4100805
	AVPTC313714A*		24,000	17,800	15.00	12.50	4589032
AWUF31XX16A*		23,000	17,000	14.50	12.00	4100814	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0241A* (cont.)	AWUF32XX16A*		23,000	17,000	14.50	12.00	4100816
	CA*F3636*6B*	GME950603BXA*	23,400	17,300	14.50	12.00	4703583
	CA*F3636*6B*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4589231
	CA*F3636*6B*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4589033
	CA*F3636*6C*	GME950603BXA*	23,400	17,300	14.50	12.00	4703586
	CA*F3636*6C*	GME950403BXA*	23,400	17,300	14.50	12.30	4703558
	CA*F3636*6C*	G*VM960805DXA*	23,600	17,500	15.00	12.50	4655221
	CA*F3636*6C*	G*VM960805CXA*	23,600	17,500	15.00	12.50	4655211
	CA*F3636*6C*	A*VM960805CXA*	23,600	17,500	15.00	12.50	4655210
	CA*F3636*6C*	A*VM960805DXA*	23,600	17,500	15.00	12.50	4652148
	CA*F3636*6C*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652097
	CA*F3636*6C*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652096
	CA*F3636*6C*	G*VM960603BXA*	23,600	17,500	15.00	12.50	4652072
	CA*F3636*6C*	A*VM960603BXA*	23,600	17,500	15.00	12.50	4652070
	CA*F3636*6C*	A*VC950905CXA*	23,600	17,500	15.00	12.50	4589232
	CA*F3636*6C*	G*VC950915DXA*	23,600	17,500	15.00	12.50	4589038
	CA*F3636*6C*	G*VC950905DXA*	23,600	17,500	15.00	12.50	4589037
	CA*F3636*6C*	G*VC950905CXA*	23,600	17,500	15.00	12.50	4589036
	CA*F3636*6C*	G*VC90905DXA*	23,600	17,500	15.00	12.50	4589035
	CA*F3636*6C*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4518806
	CA*F3636*6C*	A*VC950915DXA*	23,600	17,500	15.00	12.50	4518805
	CA*F3636*6C*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4518804
	CA*F3636*6C*	MBVC1200** -1A*	24,000	17,800	15.00	12.50	4100826
	CA*F3636*6C*	MBE1200** -1B*	24,000	17,800	15.00	12.50	4100824
	CA*F3636*6C*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4100698
	CA*F3636*6C*	G*VC950453BXA*	23,600	17,500	15.00	12.50	4100685
	CA*F3636*6C*	G*VC90704CXA*	23,800	17,600	14.50	12.20	4100669
	CA*F3636*6C*	G*VC80704BXA*	23,600	17,500	15.00	12.50	4100668
	CA*F3636*6C*	G*E80703B**	23,600	17,500	15.00	12.50	4100521
	CA*F3636*6C*	A*VC950905DXA*	23,600	17,500	15.00	12.50	4100482
	CA*F3636*6C*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4100455
	CA*F3636*6C*	A*VC950453BXA*	23,600	17,500	15.00	12.50	4100443
	CA*F3636*6C*	A*VC90905DXA*	23,600	17,500	15.00	12.50	4100433
	CA*F3636*6C*	A*VC90704CXA*	23,600	17,500	15.00	12.50	4100417
	CA*F3636*6C*	A*VC80704BXA*	23,600	17,500	15.00	12.50	4100415
	CA*F3636*6C*+EEP		24,000	17,800	14.00	12.00	4100822
	CA*F3636*6D*	GME950603BXA*	23,400	17,300	14.50	12.00	4703589
	CA*F3636*6D*	GME950403BXA*	23,400	17,300	14.50	12.30	4703561
	CA*F3636*6D*	G*VM960805DXA*	23,600	17,500	15.00	12.50	4655223
	CA*F3636*6D*	G*VM960805CXA*	23,600	17,500	15.00	12.50	4655213
	CA*F3636*6D*	A*VM960805DXA*	23,600	17,500	15.00	12.50	4652150
	CA*F3636*6D*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652104
	CA*F3636*6D*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652102
	CA*F3636*6D*	A*VM960603BXA*	23,600	17,500	15.00	12.50	4652076
	CA*F3636*6D*	G*VM960603BXA*	23,600	17,500	15.00	12.50	4652074
	CA*F3636*6D*	A*VM960805CXA*	23,600	17,500	15.00	12.50	4652067
	CA*F3636*6D*	G*VC950915DXA*	23,600	17,500	15.00	12.50	4589045
	CA*F3636*6D*	G*VC950905DXA*	23,600	17,500	15.00	12.50	4589044
	CA*F3636*6D*	G*VC950905CXA*	23,600	17,500	15.00	12.50	4589043
	CA*F3636*6D*	G*VC90905DXA*	23,600	17,500	15.00	12.50	4589042
CA*F3636*6D*	MBVC1200** -1A*	24,000	17,800	15.00	12.50	4518824	
CA*F3636*6D*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4518822	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0241A* (cont.)	CA*F3636*6D*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4518821
	CA*F3636*6D*	G*VC950453BXA*	23,600	17,500	15.00	12.50	4518820
	CA*F3636*6D*	G*VC90704CXA*	23,600	17,500	14.50	12.50	4518819
	CA*F3636*6D*	G*VC80704BXA*	23,600	17,500	15.00	12.50	4518818
	CA*F3636*6D*	G*E80703B**	23,600	17,500	15.00	12.50	4518816
	CA*F3636*6D*	A*VC950915DXA*	23,600	17,500	15.00	12.50	4518815
	CA*F3636*6D*	A*VC950905DXA*	23,600	17,500	15.00	12.50	4518814
	CA*F3636*6D*	A*VC950905CXA*	23,600	17,500	15.00	12.50	4518813
	CA*F3636*6D*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4518812
	CA*F3636*6D*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4518811
	CA*F3636*6D*	A*VC950453BXA*	23,600	17,500	15.00	12.50	4518810
	CA*F3636*6D*	A*VC90905DXA*	23,600	17,500	15.00	12.50	4518809
	CA*F3636*6D*	A*VC90704CXA*	23,600	17,500	15.00	12.50	4518808
	CA*F3636*6D*	A*VC80704BXA*	23,600	17,500	15.00	12.50	4518807
	CA*F3636*6D*+EEP		24,000	17,800	14.00	12.00	4518823
	CA*F3642*6B*	GME950603BXA*	23,400	17,300	14.50	12.00	4703592
	CA*F3642*6B*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4655216
	CA*F3642*6B*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4655215
	CA*F3642*6B*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4589233
	CA*F3642*6B*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4589046
	CA*F3642*6B*+TXV	GME950603BXA*	23,400	17,300	15.00	12.50	4703620
	CA*F3642*6C*	GME950603BXA*	23,400	17,300	14.50	12.00	4703595
	CA*F3642*6C*	A*VC81155CXA*	23,600	17,500	15.00	12.50	4589234
	CA*F3642*6C*	G*VC81155CXA*	23,600	17,500	15.00	12.50	4589049
	CA*F3642*6C*	G*VC90704CXA*	23,600	17,500	15.00	12.50	4589047
	CA*F3642*6C*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4518826
	CA*F3642*6C*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4518825
	CA*F3642*6C*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4100699
	CA*F3642*6C*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4100457
	CA*F3642*6C*	A*VC90704CXA*	23,600	17,500	15.00	12.50	4100419
	CA*F3642*6C*+EEP		24,000	17,800	14.00	12.00	4100828
	CA*F3642*6C*+TXV	GME950603BXA*	23,400	17,300	15.00	12.50	4703623
	CA*F3642*6D*	GME950603BXA*	23,400	17,300	14.50	12.00	4703598
	CA*F3642*6D*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652114
	CA*F3642*6D*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652113
	CA*F3642*6D*	A*VC81155CXA*	23,600	17,500	15.00	12.50	4589235
	CA*F3642*6D*	G*VC81155CXA*	23,600	17,500	15.00	12.50	4589051
	CA*F3642*6D*	G*VC90704CXA*	23,600	17,500	15.00	12.50	4589050
	CA*F3642*6D*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4518828
	CA*F3642*6D*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4518827
	CA*F3642*6D*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4100701
	CA*F3642*6D*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4100459
	CA*F3642*6D*	A*VC90704CXA*	23,600	17,500	15.00	12.50	4100421
	CA*F3642*6D*+EEP		24,000	17,800	14.00	12.00	4100831
	CA*F3642*6D*+TXV	GME950603BXA*	23,400	17,300	15.00	12.50	4703626
	CA*F3743*6A*	GME950603BXA*	23,400	17,300	14.50	12.00	4703601
	CA*F3743*6A*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652119
	CA*F3743*6A*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652118
	CA*F3743*6A*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4518830
	CA*F3743*6A*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4518829
CA*F3743*6A*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4100703	
CA*F3743*6A*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4100461	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0241A* (cont.)	CA*F3743*6A*+EEP		24,000	17,800	14.00	12.00	4100832
	CA*F3743*6A*+EEP+TXV		24,000	17,800	14.50	12.20	4100835
	CA*F3743*6A*+TXV	GME950603BXA*	23,400	17,300	14.50	12.00	4703604
	CA*F3743*6A*+TXV	GME950403BXA*	23,400	17,300	15.00	12.50	4703563
	CA*F3743*6A*+TXV	G*VM960604CXA*	23,600	17,500	15.00	12.50	4655217
	CA*F3743*6A*+TXV	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652122
	CA*F3743*6A*+TXV	G*VM960603BXA*	23,600	17,500	15.00	12.50	4652080
	CA*F3743*6A*+TXV	A*VM960603BXA*	23,600	17,500	15.00	12.50	4652079
	CA*F3743*6A*+TXV	G*VC950714CXA*	23,600	17,500	15.00	12.50	4589055
	CA*F3743*6A*+TXV	G*VC950704CXA*	23,600	17,500	15.00	12.50	4589054
	CA*F3743*6A*+TXV	G*VC90704CXA*	23,600	17,500	15.00	12.50	4589053
	CA*F3743*6A*+TXV	A*VC950714CXA*	23,600	17,500	15.00	12.50	4518831
	CA*F3743*6A*+TXV	G*VC950453BXA*	23,600	17,500	15.00	12.50	4100688
	CA*F3743*6A*+TXV	A*VC950704CXA*	23,600	17,500	15.00	12.50	4100464
	CA*F3743*6A*+TXV	A*VC950453BXA*	23,600	17,500	15.00	12.50	4100447
	CA*F3743*6A*+TXV	A*VC90704CXA*	23,600	17,500	15.00	12.50	4100424
	CA*F3743*6D*	GME950603BXA*	23,400	17,300	14.50	12.00	4703606
	CA*F3743*6D*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652126
	CA*F3743*6D*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652125
	CA*F3743*6D*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4589236
	CA*F3743*6D*	G*VC950714CXA*	23,600	17,500	15.00	12.50	4518834
	CA*F3743*6D*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4518833
	CA*F3743*6D*	A*VC950714CXA*	23,600	17,500	15.00	12.50	4518832
	CA*F3743*6D*+EEP		24,000	17,800	14.00	12.00	4518835
	CA*F3743*6D*+EEP+TXV		24,000	17,800	14.50	12.20	4518836
	CA*F3743*6D*+TXV	GME950603BXA*	23,400	17,300	14.50	12.00	4703609
	CA*F3743*6D*+TXV	GME950403BXA*	23,400	17,300	15.00	12.50	4703565
	CA*F3743*6D*+TXV	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652129
	CA*F3743*6D*+TXV	G*VM960603BXA*	23,600	17,500	15.00	12.50	4652084
	CA*F3743*6D*+TXV	A*VM960603BXA*	23,600	17,500	15.00	12.50	4652083
	CA*F3743*6D*+TXV	G*VC950714CXA*	23,600	17,500	15.00	12.50	4594167
	CA*F3743*6D*+TXV	G*VC950704CXA*	23,600	17,500	15.00	12.50	4594166
	CA*F3743*6D*+TXV	G*VC90704CXA*	23,600	17,500	15.00	12.50	4594165
	CA*F3743*6D*+TXV	G*VC950453BXA*	23,600	17,500	15.00	12.50	4518841
	CA*F3743*6D*+TXV	A*VC950714CXA*	23,600	17,500	15.00	12.50	4518840
	CA*F3743*6D*+TXV	A*VC950704CXA*	23,600	17,500	15.00	12.50	4518839
	CA*F3743*6D*+TXV	A*VC950453BXA*	23,600	17,500	15.00	12.50	4518838
	CA*F3743*6D*+TXV	A*VC90704CXA*	23,600	17,500	15.00	12.50	4518837
	CHPF3636B6C*	GME950403BXA*	23,400	17,300	14.50	12.30	4703569
	CHPF3636B6C*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652136
	CHPF3636B6C*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652135
	CHPF3636B6C*	G*VM960603BXA*	23,600	17,500	15.00	12.50	4652087
	CHPF3636B6C*	A*VM960603BXA*	23,600	17,500	15.00	12.50	4652086
	CHPF3636B6C*	A*VC80704BXA*	23,600	17,500	14.50	12.20	4589238
	CHPF3636B6C*	G*VC80704BXA*	23,600	17,500	14.50	12.20	4589061
	CHPF3636B6C*	MBVC1200**--1A*	24,000	17,800	15.00	12.50	4100869
	CHPF3636B6C*	MBE1200**--1B*	24,000	17,800	15.00	12.50	4100867
	CHPF3636B6C*	G*VC950453BXA*	23,600	17,500	15.00	12.50	4100691
	CHPF3636B6C*	G*E80703B**	23,600	17,500	14.50	12.20	4100523
	CHPF3636B6C*	A*VC950453BXA*	23,600	17,500	15.00	12.50	4100450
CHPF3636B6C*+EEP		24,000	17,800	14.00	12.00	4100863	
CHPF3636B6C*+EEP+TXV		24,000	17,800	14.50	12.20	4100866	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0241A* (cont.)	CHPF3642C6B*	GME950603BXA*	23,400	17,300	14.50	12.00	4703611
	CHPF3642C6B*+TXV	GME950603BXA*	23,400	17,300	15.00	12.50	4703631
	CHPF3642C6C*	GME950603BXA*	23,400	17,300	14.50	12.00	4703614
	CHPF3642C6C*	G*VM960604CXA*	23,600	17,500	15.00	12.50	4652142
	CHPF3642C6C*	A*VM960604CXA*	23,600	17,500	15.00	12.50	4652141
	CHPF3642C6C*	A*VC81155CXA*	23,000	17,000	15.00	12.50	4589241
	CHPF3642C6C*	A*VC80905CXA*	23,000	17,000	15.00	12.50	4589240
	CHPF3642C6C*	G*VC81155CXA*	23,000	17,000	15.00	12.50	4589066
	CHPF3642C6C*	G*VC80905CXA*	23,000	17,000	15.00	12.50	4589065
	CHPF3642C6C*	G*VC90704CXA*	23,600	17,500	15.00	12.50	4589063
	CHPF3642C6C*	G*VC950704CXA*	23,600	17,500	15.00	12.50	4100714
	CHPF3642C6C*	A*VC950704CXA*	23,600	17,500	15.00	12.50	4100474
	CHPF3642C6C*	A*VC90704CXA*	23,600	17,500	15.00	12.50	4100428
	CHPF3642C6C*+TXV	GME950603BXA*	23,400	17,300	15.00	12.50	4703634
	CSCF3036N6B*	G*VM960604CXA*	23,600	17,500	14.50	12.20	4655220
	CSCF3036N6B*	A*VM960604CXA*	23,600	17,500	14.50	12.20	4652147
	CSCF3036N6B*	G*VM960603BXA*	23,600	17,500	14.50	12.20	4652091
	CSCF3036N6B*	A*VM960603BXA*	23,600	17,500	14.50	12.20	4652090
	CSCF3036N6B*	A*VC81155CXA*	23,600	17,500	15.00	12.50	4589244
	CSCF3036N6B*	A*VC80905CXA*	23,600	17,500	15.00	12.50	4589243
	CSCF3036N6B*	A*VC80704BXA*	23,600	17,500	14.50	12.20	4589242
	CSCF3036N6B*	G*VC81155CXA*	23,600	17,500	15.00	12.50	4589073
	CSCF3036N6B*	G*VC80905CXA*	23,600	17,500	15.00	12.50	4589072
	CSCF3036N6B*	G*VC80704BXA*	23,600	17,500	14.50	12.20	4589071
	CSCF3036N6B*	G*VC90704CXA*	23,600	17,500	14.50	12.20	4589067
	CSCF3036N6B*	G*VC950704CXA*	23,600	17,500	14.50	12.20	4100719
	CSCF3036N6B*	G*VC950453BXA*	23,600	17,500	14.50	12.20	4100693
	CSCF3036N6B*	G*E80703B**	23,600	17,500	14.50	12.20	4100524
	CSCF3036N6B*	A*VC950704CXA*	23,600	17,500	14.50	12.20	4100479
	CSCF3036N6B*	A*VC950453BXA*	23,600	17,500	14.50	12.20	4100452
	CSCF3036N6B*	A*VC90704CXA*	23,600	17,500	14.50	12.20	4100430
	CSCF3036N6B*+EEP		23,600	17,500	14.00	12.00	4100891
	CSCF3036N6B*+TXV	GME950603BXA*	23,400	17,300	14.50	12.00	4703617
	CSCF3036N6B*+TXV	GME950403BXA*	23,400	17,300	14.50	12.00	4703572
	CSCF3642N6C*+EEP+TXV		24,000	17,800	14.50	12.20	4100895
	CSCF3642N6D*+EEP+TXV		24,000	17,800	14.00	12.00	4767436
GSX14 0301A*	AEPF313716A*		28,800	22,500	15.0	12.5	4100771
	AR*F193116B*		28,800	22,500	14.0	12.0	4100780
	AR*F193116C*		28,800	22,500	14.0	12.0	4260514
	AR*F363616B*		28,000	21,800	13.5	11.8	4100782
	AR*F363616C*		28,000	21,800	13.5	11.8	4260508
	ASPF313716C*		29,000	22,600	15.0	12.5	4518847
	ASPF313716D*		29,000	22,600	15.0	12.5	4518848
	ASPF313716E*		29,000	22,600	15.0	12.5	4518849
	AT*F193116A*		28,800	22,500	14.0	12.0	4100806
	AT*F363616A*		28,000	21,800	13.5	11.8	4100808
	AVPTC313714A*		28,800	22,500	15.0	12.5	4589079
	AWUF31XX16A*		28,000	21,800	14.0	12.0	4100815
	AWUF31XX16A*+TXV		28,400	22,200	14.5	12.3	4589080
	AWUF32XX16A*		28,000	21,800	14.0	12.0	4100817
	AWUF32XX16A*+TXV		28,400	22,200	14.5	12.3	4101583
AWUF37XX16B*		28,400	22,200	14.0	12.0	4635480	

See Notes on Page 18.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0301A* (cont.)	AWUF37XX16B*+TXV		28,600	22,300	14.5	12.0	4635482
	CA*F3636*6C*	G*VM960604CXA*	28,800	22,500	14.5	12.3	4655232
	CA*F3636*6C*	G*VM960603BXA*	28,800	22,500	15.0	13.0	4655229
	CA*F3636*6C*	A*VM960604CXA*	28,800	22,500	14.5	12.3	4652326
	CA*F3636*6C*	A*VM960603BXA*	28,800	22,500	15.0	13.0	4652296
	CA*F3636*6C*	A*VC80704BXA*	28,000	21,800	14.5	12.3	4589250
	CA*F3636*6C*	MBVC1200** -1A*	28,800	22,500	15.0	12.5	4589087
	CA*F3636*6C*	G*VC80704BXA*	28,000	21,800	14.5	12.3	4589085
	CA*F3636*6C*	G*VC950714CXA*	28,800	22,500	14.5	12.3	4589084
	CA*F3636*6C*	G*VC950704CXA*	28,800	22,500	14.5	12.3	4589083
	CA*F3636*6C*	G*VC950453BXA*	28,800	22,500	15.0	13.0	4589082
	CA*F3636*6C*	G*VC90704CXA*	28,800	22,500	14.5	12.3	4589081
	CA*F3636*6C*	A*VC950714CXA*	28,800	22,500	14.5	12.3	4518850
	CA*F3636*6C*	A*VC950704CXA*	28,800	22,500	14.5	12.3	4100456
	CA*F3636*6C*	A*VC950453BXA*	28,800	22,500	15.0	13.0	4100444
	CA*F3636*6C*	A*VC90704CXA*	28,800	22,500	14.5	12.3	4100418
	CA*F3636*6C*+EEP+TXV		28,800	22,500	14.0	12.0	4589086
	CA*F3636*6C*+TXV	GME950603BXA*	28,600	22,300	14.5	12.3	4703637
	CA*F3636*6C*+TXV	A*VC80704BXA*	28,000	21,800	15.0	12.5	4589251
	CA*F3636*6C*+TXV	G*VC80704BXA*	28,000	21,800	15.0	12.5	4589088
	CA*F3636*6D*	GME950403BXA*	28,800	22,500	15.0	12.8	4701054
	CA*F3636*6D*	G*VM960604CXA*	28,800	22,500	14.5	12.3	4655235
	CA*F3636*6D*	G*VM960603BXA*	28,800	22,500	15.0	12.8	4655231
	CA*F3636*6D*	A*VM960604CXA*	28,800	22,500	14.5	12.3	4652328
	CA*F3636*6D*	A*VM960603BXA*	28,800	22,500	15.0	12.8	4652298
	CA*F3636*6D*	MBVC1200** -1A*	28,800	22,500	15.0	12.5	4589093
	CA*F3636*6D*	G*VC950714CXA*	28,800	22,500	14.5	12.3	4589092
	CA*F3636*6D*	G*VC950704CXA*	28,800	22,500	14.5	12.3	4589091
	CA*F3636*6D*	G*VC950453BXA*	28,800	22,500	15.0	12.8	4589090
	CA*F3636*6D*	G*VC90704CXA*	28,800	22,500	14.5	12.3	4589089
	CA*F3636*6D*	A*VC950714CXA*	28,800	22,500	14.5	12.3	4518854
	CA*F3636*6D*	A*VC950704CXA*	28,800	22,500	14.5	12.3	4518853
	CA*F3636*6D*	A*VC950453BXA*	28,800	22,500	15.0	12.8	4518852
	CA*F3636*6D*	A*VC90704CXA*	28,800	22,500	14.5	12.3	4518851
	CA*F3636*6D*+EEP+TXV		28,800	22,500	14.0	12.0	4518855
	CA*F3636*6D*+TXV	GME950603BXA*	28,600	22,300	14.5	12.3	4703639
	CA*F3636*6D*+TXV	A*VC80704BXA*	28,000	21,800	15.0	12.5	4589252
	CA*F3636*6D*+TXV	G*VC80704BXA*	28,000	21,800	15.0	12.5	4589094
	CA*F3642*6B*	G*VM960805DXA*	29,000	22,600	15.0	12.5	4655249
	CA*F3642*6B*	A*VM960805DXA*	29,000	22,600	15.0	12.5	4655248
	CA*F3642*6B*	A*VM960604CXA*	28,800	22,500	15.0	12.5	4655237
	CA*F3642*6B*	G*VM960604CXA*	28,800	22,500	15.0	12.5	4655236
	CA*F3642*6B*	A*VC950915DXA*	29,000	22,600	15.0	12.5	4589254
	CA*F3642*6B*	A*VC950714CXA*	28,800	22,500	15.0	12.5	4589253
	CA*F3642*6B*	G*VC950915DXA*	29,000	22,600	15.0	12.5	4589096
	CA*F3642*6B*	G*VC950714CXA*	28,800	22,500	15.0	12.5	4589095
	CA*F3642*6B*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703641
	CA*F3642*6C*	A*VC81155CXA*	28,800	22,500	15.0	12.5	4589259
	CA*F3642*6C*	A*VC80905CXA*	28,800	22,500	15.0	12.5	4589258
	CA*F3642*6C*	A*VC950905CXA*	29,000	22,600	15.0	12.5	4589257
CA*F3642*6C*	A*VC950714CXA*	28,800	22,500	15.0	12.5	4589256	
CA*F3642*6C*	A*VC90905DXA*	28,800	22,500	15.0	13.0	4589255	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0301A* (cont.)	CA*F3642*6C*	G*VC81155CXA*	28,800	22,500	15.0	12.5	4589106
	CA*F3642*6C*	G*VC80905CXA*	28,800	22,500	15.0	12.5	4589105
	CA*F3642*6C*	G*VC950915DXA*	29,000	22,600	15.0	12.5	4589100
	CA*F3642*6C*	G*VC950905CXA*	29,000	22,600	15.0	12.5	4589099
	CA*F3642*6C*	G*VC950714CXA*	28,800	22,500	15.0	12.5	4589098
	CA*F3642*6C*	G*VC90905DXA*	28,800	22,500	15.0	13.0	4589097
	CA*F3642*6C*	A*VC950915DXA*	29,000	22,600	15.0	12.5	4518856
	CA*F3642*6C*	G*VC951155DXA*	28,600	22,300	14.7	12.3	4100745
	CA*F3642*6C*	G*VC950905DXA*	29,000	22,600	15.0	12.5	4100726
	CA*F3642*6C*	G*VC950704CXA*	28,800	22,500	15.0	12.5	4100700
	CA*F3642*6C*	G*VC90704CXA*	28,800	22,500	14.2	11.8	4100670
	CA*F3642*6C*	A*VC951155DXA*	28,600	22,300	14.7	12.3	4100502
	CA*F3642*6C*	A*VC950905DXA*	29,000	22,600	15.0	12.5	4100483
	CA*F3642*6C*	A*VC950704CXA*	28,800	22,500	15.0	12.5	4100458
	CA*F3642*6C*	A*VC90704CXA*	28,800	22,500	15.0	12.5	4100420
	CA*F3642*6C*+EEP		28,800	22,500	14.0	12.0	4100829
	CA*F3642*6C*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703644
	CA*F3642*6C*+TXV	G*E80703B**	28,800	22,500	15.0	12.5	4589107
	CA*F3642*6C*+TXV	G*E81155C**	28,800	22,500	15.0	12.5	4100552
	CA*F3642*6C*+TXV	G*E80905C**	28,800	22,500	15.0	12.5	4100540
	CA*F3642*6D*	G*VM960805CXA*	29,000	22,600	15.0	12.5	4655245
	CA*F3642*6D*	A*VM960805CXA*	29,000	22,600	15.0	12.5	4655244
	CA*F3642*6D*	G*VM960805DXA*	29,000	22,600	15.0	12.5	4652414
	CA*F3642*6D*	A*VM960805DXA*	29,000	22,600	15.0	12.5	4652413
	CA*F3642*6D*	G*VM960604CXA*	28,800	22,500	15.0	12.5	4652338
	CA*F3642*6D*	A*VM960604CXA*	28,800	22,500	15.0	12.5	4652336
	CA*F3642*6D*	G*VM961005DXA*	28,600	22,300	14.7	12.3	4652248
	CA*F3642*6D*	A*VM961005DXA*	28,600	22,300	14.7	12.3	4652247
	CA*F3642*6D*	G*VM961155DXA*	28,600	22,300	14.7	12.3	4652234
	CA*F3642*6D*	A*VM961155DXA*	28,600	22,300	14.7	12.3	4652233
	CA*F3642*6D*	A*VC81155CXA*	28,800	22,500	15.0	12.5	4589262
	CA*F3642*6D*	A*VC80905CXA*	28,800	22,500	15.0	12.5	4589261
	CA*F3642*6D*	A*VC950905CXA*	29,000	22,600	15.0	12.5	4589260
	CA*F3642*6D*	G*VC950905CXA*	29,000	22,600	15.0	12.5	4589108
	CA*F3642*6D*	G*VC950915DXA*	29,000	22,600	15.0	12.5	4518862
	CA*F3642*6D*	G*VC950714CXA*	28,800	22,500	15.0	12.5	4518861
	CA*F3642*6D*	G*VC81155CXA*	28,800	22,500	15.0	12.5	4518860
	CA*F3642*6D*	G*VC80905CXA*	28,800	22,500	15.0	12.5	4518859
	CA*F3642*6D*	A*VC950915DXA*	29,000	22,600	15.0	12.5	4518858
	CA*F3642*6D*	A*VC950714CXA*	28,800	22,500	15.0	12.5	4518857
	CA*F3642*6D*	G*VC951155DXA*	28,600	22,300	14.7	12.3	4100746
	CA*F3642*6D*	G*VC950905DXA*	29,000	22,600	15.0	12.5	4100727
	CA*F3642*6D*	G*VC950704CXA*	28,800	22,500	15.0	12.5	4100702
	CA*F3642*6D*	G*VC90704CXA*	28,800	22,500	14.2	11.8	4100672
	CA*F3642*6D*	A*VC951155DXA*	28,600	22,300	14.7	12.3	4100503
	CA*F3642*6D*	A*VC950905DXA*	29,000	22,600	15.0	12.5	4100484
	CA*F3642*6D*	A*VC950704CXA*	28,800	22,500	15.0	12.5	4100460
	CA*F3642*6D*	A*VC90704CXA*	28,800	22,500	15.0	12.5	4100422
	CA*F3642*6D*+EEP		28,800	22,500	14.0	12.0	4589110
	CA*F3642*6D*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703647
CA*F3642*6D*+TXV	G*E80703B**	28,800	22,500	15.0	12.5	4589111	
CA*F3642*6D*+TXV	G*E81155C**	28,800	22,500	15.0	12.5	4100553	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0301A* (cont.)	CA*F3642*6D*+TXV	G*E80905C**	28,800	22,500	15.0	12.5	4100541
	CA*F3743*6A*	G*VM960805CXA*	29,000	22,600	15.0	12.5	4655247
	CA*F3743*6A*	A*VM960805CXA*	29,000	22,600	15.0	12.5	4655246
	CA*F3743*6A*	G*VM960805DXA*	29,000	22,600	15.0	12.5	4652419
	CA*F3743*6A*	A*VM960805DXA*	29,000	22,600	15.0	12.5	4652418
	CA*F3743*6A*	A*VM960604CXA*	28,800	22,500	15.0	12.5	4652342
	CA*F3743*6A*	G*VM960604CXA*	28,800	22,500	15.0	12.5	4652341
	CA*F3743*6A*	G*VM960603BXA*	28,800	22,500	14.5	12.2	4652303
	CA*F3743*6A*	A*VM960603BXA*	28,800	22,500	14.5	12.2	4652302
	CA*F3743*6A*	A*VM961005DXA*	28,600	22,300	14.7	12.3	4652254
	CA*F3743*6A*	G*VM961005DXA*	28,600	22,300	14.7	12.3	4652253
	CA*F3743*6A*	A*VM961155DXA*	28,600	22,300	14.7	12.3	4652240
	CA*F3743*6A*	G*VM961155DXA*	28,600	22,300	14.7	12.3	4652239
	CA*F3743*6A*	A*VC90704CXA*	28,800	22,500	14.2	11.8	4589264
	CA*F3743*6A*	A*VC950905CXA*	29,000	22,600	15.0	12.5	4589263
	CA*F3743*6A*	G*VC950905CXA*	29,000	22,600	15.0	12.5	4589112
	CA*F3743*6A*	G*VC950915DXA*	29,000	22,600	15.0	12.5	4518866
	CA*F3743*6A*	G*VC950714CXA*	28,800	22,500	15.0	12.5	4518865
	CA*F3743*6A*	A*VC950915DXA*	29,000	22,600	15.0	12.5	4518864
	CA*F3743*6A*	A*VC950714CXA*	28,800	22,500	15.0	12.5	4518863
	CA*F3743*6A*	G*VC951155DXA*	28,600	22,300	14.7	12.3	4100747
	CA*F3743*6A*	G*VC950905DXA*	29,000	22,600	15.0	12.5	4100728
	CA*F3743*6A*	G*VC950704CXA*	28,800	22,500	15.0	12.5	4100704
	CA*F3743*6A*	G*VC950453BXA*	28,800	22,500	14.5	12.2	4100686
	CA*F3743*6A*	G*VC90704CXA*	28,800	22,500	14.2	11.8	4100674
	CA*F3743*6A*	A*VC951155DXA*	28,600	22,300	14.7	12.3	4100504
	CA*F3743*6A*	A*VC950905DXA*	29,000	22,600	15.0	12.5	4100485
	CA*F3743*6A*	A*VC950704CXA*	28,800	22,500	15.0	12.5	4100462
	CA*F3743*6A*	A*VC950453BXA*	28,800	22,500	14.5	12.2	4100445
	CA*F3743*6A*+EEP+TXV		28,800	22,500	14.5	12.2	4100836
	CA*F3743*6A*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703650
	CA*F3743*6A*+TXV	A*VM960604CXA*	28,800	22,500	15.0	12.5	4655240
	CA*F3743*6A*+TXV	G*VM960604CXA*	28,800	22,500	15.0	12.5	4655239
	CA*F3743*6A*+TXV	G*VM960603BXA*	28,800	22,500	15.0	12.5	4652308
	CA*F3743*6A*+TXV	A*VM960603BXA*	28,800	22,500	15.0	12.5	4652307
	CA*F3743*6A*+TXV	A*VC950905DXA*	28,800	22,500	15.0	13.0	4589267
	CA*F3743*6A*+TXV	A*VC950714CXA*	28,800	22,500	15.0	12.5	4589266
	CA*F3743*6A*+TXV	A*VC90905DXA*	28,800	22,500	15.0	13.0	4589265
	CA*F3743*6A*+TXV	G*VC950905DXA*	28,800	22,500	15.0	13.0	4589122
	CA*F3743*6A*+TXV	G*VC950714CXA*	28,800	22,500	15.0	12.5	4589121
	CA*F3743*6A*+TXV	G*VC950704CXA*	28,800	22,500	15.0	12.5	4589120
	CA*F3743*6A*+TXV	G*VC90905DXA*	28,800	22,500	15.0	13.0	4589119
	CA*F3743*6A*+TXV	G*VC90704CXA*	28,800	22,500	15.0	12.5	4589118
	CA*F3743*6A*+TXV	G*VC950453BXA*	28,800	22,500	15.0	12.5	4100689
	CA*F3743*6A*+TXV	G*E81155C**	28,800	22,500	15.0	12.5	4100554
	CA*F3743*6A*+TXV	G*E80905C**	28,800	22,500	15.0	12.5	4100542
	CA*F3743*6A*+TXV	A*VC950704CXA*	28,800	22,500	15.0	12.5	4100465
	CA*F3743*6A*+TXV	A*VC950453BXA*	28,800	22,500	15.0	12.5	4100448
	CA*F3743*6A*+TXV	A*VC90704CXA*	28,800	22,500	15.0	12.5	4100425
	CA*F3743*6D*	GME950403BXA*	28,800	22,500	14.5	12.2	4701064
CA*F3743*6D*	G*VM960805DXA*	29,000	22,600	15.0	12.5	4652424	
CA*F3743*6D*	A*VM960805DXA*	29,000	22,600	15.0	12.5	4652423	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0301A* (cont.)	CA*F3743*6D*	G*VM960805CXA*	29,000	22,600	15.0	12.5	4652396
	CA*F3743*6D*	A*VM960805CXA*	29,000	22,600	15.0	12.5	4652395
	CA*F3743*6D*	G*VM960604CXA*	28,800	22,500	15.0	12.5	4652351
	CA*F3743*6D*	A*VM960604CXA*	28,800	22,500	15.0	12.5	4652350
	CA*F3743*6D*	A*VM960603BXA*	28,800	22,500	14.5	12.2	4652312
	CA*F3743*6D*	G*VM960603BXA*	28,800	22,500	14.5	12.2	4652311
	CA*F3743*6D*	A*VM961005DXA*	28,600	22,300	14.7	12.3	4652258
	CA*F3743*6D*	G*VM961005DXA*	28,600	22,300	14.7	12.3	4652257
	CA*F3743*6D*	A*VM961155DXA*	28,600	22,300	14.7	12.3	4652244
	CA*F3743*6D*	G*VM961155DXA*	28,600	22,300	14.7	12.3	4652243
	CA*F3743*6D*	A*VC90704CXA*	28,800	22,500	14.2	11.8	4589268
	CA*F3743*6D*	G*VC951155DXA*	28,600	22,300	14.7	12.3	4518881
	CA*F3743*6D*	G*VC950915DXA*	29,000	22,600	15.0	12.5	4518880
	CA*F3743*6D*	G*VC950905DXA*	29,000	22,600	15.0	12.5	4518879
	CA*F3743*6D*	G*VC950905CXA*	29,000	22,600	15.0	12.5	4518878
	CA*F3743*6D*	G*VC950714CXA*	28,800	22,500	15.0	12.5	4518877
	CA*F3743*6D*	G*VC950704CXA*	28,800	22,500	15.0	12.5	4518876
	CA*F3743*6D*	G*VC950453BXA*	28,800	22,500	14.5	12.2	4518875
	CA*F3743*6D*	G*VC90704CXA*	28,800	22,500	14.2	11.8	4518874
	CA*F3743*6D*	A*VC951155DXA*	28,600	22,300	14.7	12.3	4518873
	CA*F3743*6D*	A*VC950915DXA*	29,000	22,600	15.0	12.5	4518872
	CA*F3743*6D*	A*VC950905DXA*	29,000	22,600	15.0	12.5	4518871
	CA*F3743*6D*	A*VC950905CXA*	29,000	22,600	15.0	12.5	4518870
	CA*F3743*6D*	A*VC950714CXA*	28,800	22,500	15.0	12.5	4518869
	CA*F3743*6D*	A*VC950704CXA*	28,800	22,500	15.0	12.5	4518868
	CA*F3743*6D*	A*VC950453BXA*	28,800	22,500	14.5	12.2	4518867
	CA*F3743*6D*+EEP+TXV		28,800	22,500	14.5	12.2	4518882
	CA*F3743*6D*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703653
	CA*F3743*6D*+TXV	GME950403BXA*	28,800	22,500	15.0	12.5	4701069
	CA*F3743*6D*+TXV	A*VM960604CXA*	28,800	22,500	15.0	12.5	4652355
	CA*F3743*6D*+TXV	A*VM960603BXA*	28,800	22,500	15.0	12.5	4652315
	CA*F3743*6D*+TXV	G*VM960603BXA*	28,800	22,500	15.0	12.5	4652314
	CA*F3743*6D*+TXV	G*VC950905DXA*	28,800	22,500	15.0	13.0	4594172
	CA*F3743*6D*+TXV	G*VC950714CXA*	28,800	22,500	15.0	12.5	4594171
	CA*F3743*6D*+TXV	G*VC950704CXA*	28,800	22,500	15.0	12.5	4594170
	CA*F3743*6D*+TXV	G*VC90905DXA*	28,800	22,500	15.0	13.0	4594169
	CA*F3743*6D*+TXV	G*VC90704CXA*	28,800	22,500	15.0	12.5	4594168
	CA*F3743*6D*+TXV	G*VC950453BXA*	28,800	22,500	15.0	12.5	4518891
	CA*F3743*6D*+TXV	G*E81155C**	28,800	22,500	15.0	12.5	4518890
	CA*F3743*6D*+TXV	G*E80905C**	28,800	22,500	15.0	12.5	4518889
	CA*F3743*6D*+TXV	A*VC950905DXA*	28,800	22,500	15.0	13.0	4518888
	CA*F3743*6D*+TXV	A*VC950714CXA*	28,800	22,500	15.0	12.5	4518887
	CA*F3743*6D*+TXV	A*VC950704CXA*	28,800	22,500	15.0	12.5	4518886
	CA*F3743*6D*+TXV	A*VC950453BXA*	28,800	22,500	15.0	12.5	4518885
	CA*F3743*6D*+TXV	A*VC90905DXA*	28,800	22,500	15.0	13.0	4518884
	CA*F3743*6D*+TXV	A*VC90704CXA*	28,800	22,500	15.0	12.5	4518883
	CA*F4860*6B*	A*VC950915DXA*	28,800	22,500	15.0	13.0	4589270
	CA*F4860*6B*	A*VC950905CXA*	28,800	22,500	15.0	13.0	4589269
	CA*F4860*6B*	G*VC950915DXA*	28,800	22,500	15.0	13.0	4589127
	CA*F4860*6B*	G*VC950905DXA*	28,800	22,500	15.0	13.0	4589126
CA*F4860*6B*	G*VC950905CXA*	28,800	22,500	15.0	13.0	4589125	
CA*F4860*6B*	G*VC90905DXA*	28,800	22,500	15.0	13.0	4589124	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0301A* (cont.)	CA*F4860*6B*	A*VC950905DXA*	28,800	22,500	15.0	13.0	4100488
	CA*F4860*6B*	A*VC90905DXA*	28,800	22,500	15.0	13.0	4100434
	CA*F4860*6D*	G*VM960805DXA*	28,800	22,500	15.0	13.0	4655242
	CA*F4860*6D*	G*VM960805CXA*	28,800	22,500	15.0	13.0	4655226
	CA*F4860*6D*	A*VM960805CXA*	28,800	22,500	15.0	13.0	4655225
	CA*F4860*6D*	A*VM960805DXA*	28,800	22,500	15.0	13.0	4652382
	CA*F4860*6D*	A*VC950905CXA*	28,800	22,500	15.0	13.0	4589271
	CA*F4860*6D*	G*VC950915DXA*	28,800	22,500	15.0	13.0	4589131
	CA*F4860*6D*	G*VC950905DXA*	28,800	22,500	15.0	13.0	4589130
	CA*F4860*6D*	G*VC950905CXA*	28,800	22,500	15.0	13.0	4589129
	CA*F4860*6D*	G*VC90905DXA*	28,800	22,500	15.0	13.0	4589128
	CA*F4860*6D*	A*VC950915DXA*	28,800	22,500	15.0	13.0	4518892
	CA*F4860*6D*	A*VC950905DXA*	28,800	22,500	15.0	13.0	4100493
	CA*F4860*6D*	A*VC90905DXA*	28,800	22,500	15.0	13.0	4100437
	CHPF3636B6C*	GME950403BXA*	28,800	22,500	15.0	12.5	4701107
	CHPF3636B6C*	G*VM960603BXA*	28,800	22,500	15.0	12.5	4652321
	CHPF3636B6C*	A*VM960603BXA*	28,800	22,500	15.0	12.5	4652320
	CHPF3636B6C*	MBVC1200** -1A*	28,800	22,500	15.0	12.5	4100870
	CHPF3636B6C*	MBE1200** -1B*	28,800	22,500	15.0	12.5	4100868
	CHPF3636B6C*	G*VC950453BXA*	28,800	22,500	15.0	12.5	4100692
	CHPF3636B6C*	A*VC950453BXA*	28,800	22,500	15.0	12.5	4100451
	CHPF3636B6C*+EEP		28,800	22,500	14.0	12.0	4100864
	CHPF3642C6C*	G*VM960604CXA*	28,800	22,500	15.0	12.5	4652361
	CHPF3642C6C*	A*VM960604CXA*	28,800	22,500	15.0	12.5	4652358
	CHPF3642C6C*	A*VC81155CXA*	28,800	22,500	15.0	12.5	4589274
	CHPF3642C6C*	A*VC80905CXA*	28,800	22,500	15.0	12.5	4589273
	CHPF3642C6C*	A*VC80704BX*	28,800	22,500	15.0	13.0	4589272
	CHPF3642C6C*	G*VC80704BX*	28,800	22,500	15.0	13.0	4589135
	CHPF3642C6C*	G*VC90704CXA*	28,800	22,500	15.0	12.5	4589133
	CHPF3642C6C*	G*VC81155CXA*	28,800	22,500	15.0	12.5	4518897
	CHPF3642C6C*	G*VC80905CXA*	28,800	22,500	15.0	12.5	4518896
	CHPF3642C6C*	G*VC80704BXA*	28,800	22,500	15.0	13.0	4518895
	CHPF3642C6C*	A*VC80704BXA*	28,800	22,500	15.0	13.0	4518893
	CHPF3642C6C*	G*VC950704CXA*	28,800	22,500	15.0	12.5	4100715
	CHPF3642C6C*	A*VC950704CXA*	28,800	22,500	15.0	12.5	4100475
	CHPF3642C6C*	A*VC90704CXA*	28,800	22,500	15.0	12.5	4100429
	CHPF3642C6C*+EEP+TXV		28,800	22,500	14.5	12.2	4100871
	CHPF3642C6C*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703655
	CHPF3642C6C*+EEP+TXV		28,800	22,500	14.5	12.2	4589136
	CHPF3642D6B*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703658
	CHPF3642D6C*	G*VM960604CXA*	28,800	22,500	15.0	12.5	4652369
	CHPF3642D6C*	A*VM960604CXA*	28,800	22,500	15.0	12.5	4652368
	CHPF3642D6C*	G*VC950704CXA*	28,800	22,500	15.0	12.5	4100717
	CHPF3642D6C*	A*VC950704CXA*	28,800	22,500	15.0	12.5	4100477
	CHPF3642D6C*+EEP		28,800	22,500	14.0	12.0	4100872
	CHPF3642D6C*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703661
	CHPF3642D6C*+TXV	G*E81155C**	28,800	22,500	15.0	12.5	4100560
	CHPF3642D6C*+TXV	G*E80905C**	28,800	22,500	15.0	12.5	4100548
	CSCF3642N6C*	A*VM960604CXA*	28,800	22,500	15.0	12.5	4652372
	CSCF3642N6C*	G*VM960604CXA*	28,800	22,500	15.0	12.5	4652370
CSCF3642N6C*	A*VC81155CXA*	28,800	22,500	15.0	12.5	4589279	
CSCF3642N6C*	A*VC80905CXA*	28,800	22,500	15.0	12.5	4589278	

See Notes on Page 18.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0301A* (cont.)	CSCF3642N6C*	A*VC80704BXA*	28,800	22,500	15.0	13.0	4589277
	CSCF3642N6C*	G*VC90704CXA*	28,800	22,500	15.0	12.5	4589139
	CSCF3642N6C*	G*VC81155CXA*	28,800	22,500	15.0	12.5	4518905
	CSCF3642N6C*	G*VC80905CXA*	28,800	22,500	15.0	12.5	4518904
	CSCF3642N6C*	G*VC80704BXA*	28,800	22,500	15.0	13.0	4518903
	CSCF3642N6C*	G*VC950704CXA*	28,800	22,500	15.0	12.5	4100721
	CSCF3642N6C*	G*E80703B**	28,000	21,800	14.5	12.5	4100526
	CSCF3642N6C*	A*VC950704CXA*	28,800	22,500	15.0	12.5	4100481
	CSCF3642N6C*	A*VC90704CXA*	28,800	22,500	15.0	12.5	4100432
	CSCF3642N6C*+EEP		28,800	22,500	14.0	12.0	4100893
	CSCF3642N6C*+EEP+TXV		28,800	22,500	14.5	12.2	4100896
	CSCF3642N6C*+TXV	GME950603BXA*	28,600	22,300	15.0	12.5	4703664
	CSCF3642N6C*+TXV	G*E81155C**	28,800	22,500	15.0	12.5	4100563
	CSCF3642N6C*+TXV	G*E80905C**	28,800	22,500	15.0	12.5	4100551
	CSCF3642N6D*	G*VC950704CXA*	28,800	22,500	15.0	12.5	4767446
	CSCF3642N6D*	G*VC81155CXA*	28,800	22,500	15.0	12.5	4767445
	CSCF3642N6D*	G*VC80905CXA*	28,800	22,500	15.0	12.5	4767444
	CSCF3642N6D*	G*VC80704BXA*	28,800	22,500	15.0	12.5	4767443
	CSCF3642N6D*	G*E80704B***	28,000	21,800	14.5	12.5	4767442
	CSCF3642N6D*	G*E80703B***	28,000	21,800	14.5	12.5	4767441
	CSCF3642N6D*	A*VC950704CXA*	28,800	22,500	15.0	12.5	4767440
	CSCF3642N6D*	A*VC81155CXA*	28,800	22,500	15.0	12.5	4767439
	CSCF3642N6D*	A*VC80905CXA*	28,800	22,500	15.0	12.5	4767438
	CSCF3642N6D*	A*VC80704BXA*	28,800	22,500	15.0	12.5	4767437
	CSCF3642N6D*+EEP		28,800	22,500	14.0	12.0	4767447
	CSCF3642N6D*+EEP+TXV		28,800	22,500	14.5	12.0	4767448
GSX14 0361A*	AEPF313716A*		34,000	26,500	14.5	12.0	4100772
	AEPF426016C*		35,000	27,300	15.0	13.0	4100775
	AR*F363616B*		33,000	25,700	13.5	11.5	4100783
	AR*F363616C*		33,000	25,700	13.5	11.5	4260509
	AR*F374316B*		35,000	27,300	14.0	12.0	4100784
	AR*F374316C*		35,000	27,300	14.0	12.0	4358257
	ASPF426016B*		34,600	27,000	15.0	12.5	4589143
	ASPF426016C*		34,600	27,000	15.0	12.5	4518907
	ASPF426016D*		34,600	27,000	15.0	12.5	4518908
	ASPF426016E*		34,600	27,000	15.0	12.5	4518909
	AT*F363616A*		33,000	25,700	13.5	11.5	4100809
	AT*F374316A*		35,000	27,300	14.0	12.0	4100810
	AVPTC313714A*		34,000	26,500	14.5	12.0	4518910
	AVPTC426014A*		35,000	27,300	15.0	13.0	4518911
	AWUF37XX16B*+TXV		33,000	25,700	14.5	12.2	4100818
	CA*F3636*6C*+EEP+TXV		33,000	25,700	14.0	11.8	4588195
	CA*F3636*6D*+EEP+TXV		33,000	25,700	14.0	11.8	4588200
	CA*F3642*6C*	GME950603BXA*	34,200	26,700	13.5	11.5	4703667
	CA*F3642*6C*	A*VC950704CXA*	34,600	27,000	14.5	12.2	4589285
	CA*F3642*6C*	A*VC90905DXA*	34,600	27,000	15.0	12.5	4589284
	CA*F3642*6C*	A*VC90704CXA*	34,600	27,000	14.5	12.2	4589283
	CA*F3642*6C*	A*VC950905CXA*	34,600	27,000	15.0	12.5	4589282
	CA*F3642*6C*	G*VC950905CXA*	34,600	27,000	15.0	12.5	4589144
	CA*F3642*6C*	G*VC950704CXA*	34,600	27,000	14.5	12.2	4588197
	CA*F3642*6C*	G*VC90905DXA*	34,600	27,000	15.0	12.5	4100677
	CA*F3642*6C*	G*VC90704CXA*	34,600	27,000	14.5	12.2	4100671

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0361A* (cont.)	CA*F3642*6C*+EEP		34,600	27,000	14.0	12.0	4100830
	CA*F3642*6C*+TXV	A*VC950905CXA*	34,600	27,000	15.0	12.5	4589286
	CA*F3642*6C*+TXV	G*VC950905CXA*	34,600	27,000	15.0	12.5	4589147
	CA*F3642*6D*	GME950603BXA*	34,200	26,700	13.5	11.5	4703669
	CA*F3642*6D*	GME950805CXA*	34,600	27,000	15.0	12.5	4701157
	CA*F3642*6D*	G*VM960805CXA*	34,600	27,000	15.0	12.5	4652503
	CA*F3642*6D*	A*VM960805CXA*	34,600	27,000	15.0	12.5	4652502
	CA*F3642*6D*	A*VC90905DXA*	34,600	27,000	15.0	12.5	4589288
	CA*F3642*6D*	A*VC90704CXA*	34,600	27,000	14.5	12.2	4589287
	CA*F3642*6D*	G*VC950704CXA*	34,600	27,000	14.5	12.2	4588199
	CA*F3642*6D*	G*VC950905CXA*	34,600	27,000	15.0	12.5	4518913
	CA*F3642*6D*	A*VC950905CXA*	34,600	27,000	15.0	12.5	4518912
	CA*F3642*6D*	G*VC90905DXA*	34,600	27,000	15.0	12.5	4100678
	CA*F3642*6D*	G*VC90704CXA*	34,600	27,000	14.5	12.2	4100673
	CA*F3642*6D*+EEP		34,600	27,000	14.0	12.0	4588192
	CA*F3642*6D*+TXV	GME950805CXA*	34,600	27,000	15.0	12.5	4701062
	CA*F3642*6D*+TXV	G*VM960805CXA*	34,600	27,000	15.0	12.5	4652509
	CA*F3642*6D*+TXV	A*VM960805CXA*	34,600	27,000	15.0	12.5	4652508
	CA*F3642*6D*+TXV	G*VC950905CXA*	34,600	27,000	15.0	12.5	4518915
	CA*F3642*6D*+TXV	A*VC950905CXA*	34,600	27,000	15.0	12.5	4518914
	CA*F3743*6A*	G*VM960805CXA*	34,600	27,000	15.0	12.5	4655262
	CA*F3743*6A*	A*VM960805CXA*	34,600	27,000	15.0	12.5	4655261
	CA*F3743*6A*	A*VC90905DXA*	34,600	27,000	15.0	12.5	4589291
	CA*F3743*6A*	A*VC90704CXA*	34,600	27,000	14.5	12.2	4589290
	CA*F3743*6A*	A*VC950905CXA*	34,600	27,000	15.0	12.5	4589289
	CA*F3743*6A*	G*VC950905CXA*	34,600	27,000	15.0	12.5	4589152
	CA*F3743*6A*	G*VC90905DXA*	34,600	27,000	15.0	12.5	4100679
	CA*F3743*6A*	G*VC90704CXA*	34,600	27,000	14.5	12.2	4100675
	CA*F3743*6A*+EEP		34,600	27,000	14.0	12.0	4100833
	CA*F3743*6A*+EEP+TXV		34,600	27,000	14.5	12.2	4100837
	CA*F3743*6A*+TXV	G*VM960805DXA*	34,600	27,000	15.0	12.5	4655272
	CA*F3743*6A*+TXV	A*VM960805DXA*	34,600	27,000	15.0	12.5	4655271
	CA*F3743*6A*+TXV	G*VM960805CXA*	34,600	27,000	15.0	12.5	4655264
	CA*F3743*6A*+TXV	A*VM960805CXA*	34,600	27,000	15.0	12.5	4655263
	CA*F3743*6A*+TXV	A*VM961005DXA*	34,600	27,000	15.0	12.5	4652478
	CA*F3743*6A*+TXV	G*VM961005DXA*	34,600	27,000	15.0	12.5	4652477
	CA*F3743*6A*+TXV	A*VM961155DXA*	34,600	27,000	15.0	12.5	4652451
	CA*F3743*6A*+TXV	G*VM961155DXA*	34,600	27,000	15.0	12.5	4652450
	CA*F3743*6A*+TXV	A*VC950915DXA*	34,600	27,000	15.0	12.5	4589293
	CA*F3743*6A*+TXV	A*VC950905CXA*	34,600	27,000	15.0	12.5	4589292
	CA*F3743*6A*+TXV	G*VC950905CXA*	34,600	27,000	15.0	12.5	4589155
	CA*F3743*6A*+TXV	G*VC950915DXA*	34,600	27,000	15.0	12.5	4588205
	CA*F3743*6A*+TXV	G*VC951155DXA*	34,600	27,000	15.0	12.5	4100748
	CA*F3743*6A*+TXV	G*VC950905DXA*	34,600	27,000	15.0	12.5	4100729
	CA*F3743*6A*+TXV	A*VC951155DXA*	34,600	27,000	15.0	12.5	4100505
	CA*F3743*6A*+TXV	A*VC950905DXA*	34,600	27,000	15.0	12.5	4100486
	CA*F3743*6D*	GME950805CXA*	34,600	27,000	15.0	12.5	4701158
	CA*F3743*6D*	G*VM960805CXA*	34,600	27,000	15.0	12.5	4652519
	CA*F3743*6D*	A*VM960805CXA*	34,600	27,000	15.0	12.5	4652518
	CA*F3743*6D*	A*VC90905DXA*	34,600	27,000	15.0	12.5	4589295
CA*F3743*6D*	A*VC90704CXA*	34,600	27,000	14.5	12.2	4589294	
CA*F3743*6D*	G*VC950905CXA*	34,600	27,000	15.0	12.5	4518919	

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0361A* (cont.)	CA*F3743*6D*	G*VC90905DXA*	34,600	27,000	15.0	12.5	4518918
	CA*F3743*6D*	G*VC90704CXA*	34,600	27,000	14.5	12.2	4518917
	CA*F3743*6D*	A*VC950905CXA*	34,600	27,000	15.0	12.5	4518916
	CA*F3743*6D*+EEP		34,600	27,000	14.0	12.0	4518920
	CA*F3743*6D*+EEP+TXV		34,600	27,000	14.5	12.2	4518921
	CA*F3743*6D*+TXV	GME951005DXA*	34,600	27,000	15.0	12.5	4701077
	CA*F3743*6D*+TXV	GME950805CXA*	34,600	27,000	15.0	12.5	4701075
	CA*F3743*6D*+TXV	G*VM960805DXA*	34,600	27,000	15.0	12.5	4652580
	CA*F3743*6D*+TXV	A*VM960805DXA*	34,600	27,000	15.0	12.5	4652579
	CA*F3743*6D*+TXV	G*VM960805CXA*	34,600	27,000	15.0	12.5	4652525
	CA*F3743*6D*+TXV	A*VM960805CXA*	34,600	27,000	15.0	12.5	4652524
	CA*F3743*6D*+TXV	G*VM961005DXA*	34,600	27,000	15.0	12.5	4652483
	CA*F3743*6D*+TXV	A*VM961005DXA*	34,600	27,000	15.0	12.5	4652482
	CA*F3743*6D*+TXV	G*VM961155DXA*	34,600	27,000	15.0	12.5	4652456
	CA*F3743*6D*+TXV	A*VM961155DXA*	34,600	27,000	15.0	12.5	4652455
	CA*F3743*6D*+TXV	G*VC951155DXA*	34,600	27,000	15.0	12.5	4518929
	CA*F3743*6D*+TXV	G*VC950915DXA*	34,600	27,000	15.0	12.5	4518928
	CA*F3743*6D*+TXV	G*VC950905DXA*	34,600	27,000	15.0	12.5	4518927
	CA*F3743*6D*+TXV	G*VC950905CXA*	34,600	27,000	15.0	12.5	4518926
	CA*F3743*6D*+TXV	A*VC951155DXA*	34,600	27,000	15.0	12.5	4518925
	CA*F3743*6D*+TXV	A*VC950915DXA*	34,600	27,000	15.0	12.5	4518924
	CA*F3743*6D*+TXV	A*VC950905DXA*	34,600	27,000	15.0	12.5	4518923
	CA*F3743*6D*+TXV	A*VC950905CXA*	34,600	27,000	15.0	12.5	4518922
	CA*F4860*6B*	GME950603BXA*	34,200	26,700	14.0	11.5	4703671
	CA*F4860*6B*	A*VC81155CXA*	34,600	27,000	14.5	12.5	4589298
	CA*F4860*6B*	A*VC80905CXA*	34,600	27,000	14.5	12.5	4589297
	CA*F4860*6B*	A*VC950905CXA*	34,600	27,000	15.0	12.5	4589296
	CA*F4860*6B*	G*VC950905CXA*	34,600	27,000	15.0	12.5	4589158
	CA*F4860*6B*	G*VC950714CXA*	34,600	27,000	14.5	12.2	4588206
	CA*F4860*6B*	G*VC950915DXA*	34,600	27,000	15.0	12.5	4518934
	CA*F4860*6B*	G*VC81155CXA*	34,600	27,000	14.5	12.5	4518933
	CA*F4860*6B*	G*VC80905CXA*	34,600	27,000	14.5	12.5	4518932
	CA*F4860*6B*	A*VC950915DXA*	34,600	27,000	15.0	12.5	4518931
	CA*F4860*6B*	A*VC950714CXA*	34,600	27,000	14.5	12.2	4518930
	CA*F4860*6B*	G*VC951155DXA*	34,600	27,000	14.5	12.2	4100750
	CA*F4860*6B*	G*VC950905DXA*	34,600	27,000	15.0	12.5	4100731
	CA*F4860*6B*	G*VC950704CXA*	34,600	27,000	14.5	12.2	4100706
	CA*F4860*6B*	G*E81155C**	34,600	27,000	15.0	12.5	4100555
	CA*F4860*6B*	G*E80905C**	34,600	27,000	15.0	12.5	4100543
	CA*F4860*6B*	A*VC951155DXA*	34,600	27,000	14.5	12.2	4100507
	CA*F4860*6B*	A*VC950905DXA*	34,600	27,000	15.0	12.5	4100489
	CA*F4860*6B*	A*VC950704CXA*	34,600	27,000	14.5	12.2	4100466
	CA*F4860*6B*+EEP		35,000	27,300	14.0	12.0	4100838
	CA*F4860*6B*+TXV	GME950603BXA*	34,200	26,700	14.5	12.0	4703673
	CA*F4860*6B*+TXV	A*VC81155CXA*	34,600	27,000	15.0	12.5	4589299
	CA*F4860*6B*+TXV	G*VC950714CXA*	34,600	27,000	15.0	12.5	4518939
	CA*F4860*6B*+TXV	G*VC81155CXA*	34,600	27,000	15.0	12.5	4518938
	CA*F4860*6B*+TXV	G*VC80905CXA*	34,600	27,000	15.0	12.5	4518937
	CA*F4860*6B*+TXV	A*VC950714CXA*	34,600	27,000	15.0	12.5	4518936
	CA*F4860*6B*+TXV	A*VC80905CXA*	34,600	27,000	15.0	12.5	4518935
CA*F4860*6B*+TXV	G*VC950704CXA*	34,600	27,000	15.0	12.5	4100708	
CA*F4860*6B*+TXV	A*VC950704CXA*	34,600	27,000	15.0	12.5	4100468	

See Notes on Page 42.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0361A* (cont.)	CA*F4860*6D*	GME950603BXA*	34,200	26,700	14.0	11.5	4703675
	CA*F4860*6D*	GME951005DXA*	34,600	27,000	14.5	12.2	4701084
	CA*F4860*6D*	GME950805CXA*	34,600	27,000	15.0	12.5	4701081
	CA*F4860*6D*	G*VM960805CXA*	34,600	27,000	15.0	12.5	4655266
	CA*F4860*6D*	A*VM960805CXA*	34,600	27,000	15.0	12.5	4655265
	CA*F4860*6D*	G*VM960805DXA*	34,600	27,000	15.0	12.5	4652584
	CA*F4860*6D*	A*VM960805DXA*	34,600	27,000	15.0	12.5	4652583
	CA*F4860*6D*	A*VM960604CXA*	34,600	27,000	14.5	12.2	4652552
	CA*F4860*6D*	G*VM960604CXA*	34,600	27,000	14.5	12.2	4652551
	CA*F4860*6D*	A*VM961005DXA*	34,600	27,000	14.5	12.2	4652487
	CA*F4860*6D*	G*VM961005DXA*	34,600	27,000	14.5	12.2	4652486
	CA*F4860*6D*	A*VM961155DXA*	34,600	27,000	14.5	12.2	4652460
	CA*F4860*6D*	G*VM961155DXA*	34,600	27,000	14.5	12.2	4652459
	CA*F4860*6D*	A*VC81155CXA*	34,600	27,000	14.5	12.5	4589302
	CA*F4860*6D*	A*VC80905CXA*	34,600	27,000	14.5	12.5	4589301
	CA*F4860*6D*	A*VC950905CXA*	34,600	27,000	15.0	12.5	4589300
	CA*F4860*6D*	G*VC950905CXA*	34,600	27,000	15.0	12.5	4589163
	CA*F4860*6D*	G*VC950915DXA*	34,600	27,000	15.0	12.5	4518945
	CA*F4860*6D*	G*VC950714CXA*	34,600	27,000	14.5	12.2	4518944
	CA*F4860*6D*	G*VC81155CXA*	34,600	27,000	14.5	12.5	4518943
	CA*F4860*6D*	G*VC80905CXA*	34,600	27,000	14.5	12.5	4518942
	CA*F4860*6D*	A*VC950915DXA*	34,600	27,000	15.0	12.5	4518941
	CA*F4860*6D*	A*VC950714CXA*	34,600	27,000	14.5	12.2	4518940
	CA*F4860*6D*	G*VC951155DXA*	34,600	27,000	14.5	12.2	4100754
	CA*F4860*6D*	G*VC950905DXA*	34,600	27,000	15.0	12.5	4100734
	CA*F4860*6D*	G*VC950704CXA*	34,600	27,000	14.5	12.2	4100709
	CA*F4860*6D*	G*E81155C**	34,600	27,000	15.0	12.5	4100557
	CA*F4860*6D*	G*E80905C**	34,600	27,000	15.0	12.5	4100545
	CA*F4860*6D*	A*VC951155DXA*	34,600	27,000	14.5	12.2	4100511
	CA*F4860*6D*	A*VC950905DXA*	34,600	27,000	15.0	12.5	4100494
	CA*F4860*6D*	A*VC950704CXA*	34,600	27,000	14.5	12.2	4100469
	CA*F4860*6D*+EEP		35,000	27,300	14.0	12.0	4100849
	CA*F4860*6D*+TXV	GME950603BXA*	34,200	26,700	14.5	12.0	4703677
	CA*F4860*6D*+TXV	G*VM960604CXA*	34,600	27,000	15.0	12.5	4652556
	CA*F4860*6D*+TXV	A*VM960604CXA*	34,600	27,000	15.0	12.5	4652555
	CA*F4860*6D*+TXV	A*VC81155CXA*	34,600	27,000	15.0	12.5	4589303
	CA*F4860*6D*+TXV	G*VC950714CXA*	34,600	27,000	15.0	12.5	4518950
	CA*F4860*6D*+TXV	G*VC81155CXA*	34,600	27,000	15.0	12.5	4518949
	CA*F4860*6D*+TXV	G*VC80905CXA*	34,600	27,000	15.0	12.5	4518948
	CA*F4860*6D*+TXV	A*VC950714CXA*	34,600	27,000	15.0	12.5	4518947
	CA*F4860*6D*+TXV	A*VC80905CXA*	34,600	27,000	15.0	12.5	4518946
	CA*F4860*6D*+TXV	G*VC950704CXA*	34,600	27,000	15.0	12.5	4100711
	CA*F4860*6D*+TXV	A*VC950704CXA*	34,600	27,000	15.0	12.5	4100471
	CHPF3642C6C*	GME950603BXA*	34,200	26,700	13.8	11.5	4703679
	CHPF3642C6C*	A*VM960604CXA*	34,600	27,000	14.5	12.2	4652560
	CHPF3642C6C*	G*VM960604CXA*	34,600	27,000	14.5	12.2	4652559
	CHPF3642C6C*	A*VC81155CXA*	34,600	27,000	14.5	12.2	4589305
	CHPF3642C6C*	A*VC80905CXA*	34,600	27,000	14.5	12.2	4589304
	CHPF3642C6C*	G*VC81155CXA*	34,600	27,000	14.5	12.2	4518953
	CHPF3642C6C*	G*VC80905CXA*	34,600	27,000	14.5	12.2	4518952
CHPF3642C6C*	G*VC950704CXA*	34,600	27,000	14.5	12.2	4100716	
CHPF3642C6C*	G*E81155C**	34,600	27,000	15.0	12.5	4100559	
CHPF3642C6C*	G*E80905C**	34,600	27,000	15.0	12.5	4100547	
CHPF3642C6C*	A*VC950704CXA*	34,600	27,000	14.5	12.2	4100476	

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0361A* (cont.)	CHPF3642C6C*+EEP		34,600	27,000	14.0	12.0	4588202
	CHPF3642C6C*+TXV	GME950603BXA*	34,200	26,700	14.5	11.5	4703681
	CHPF3642C6C*+TXV	G*VM960604CXA*	34,600	27,000	15.0	12.2	4655267
	CHPF3642C6C*+TXV	G*VC81155CXA*	34,600	27,000	15.0	12.2	4588204
	CHPF3642C6C*+TXV	G*VC950704CXA*	34,600	27,000	15.0	12.2	4588186
	CHPF3642D6C*	GME951005DXA*	34,600	27,000	15.0	12.2	4701111
	CHPF3642D6C*	G*VM961005DXA*	34,600	27,000	15.0	12.2	4652493
	CHPF3642D6C*	A*VM961005DXA*	34,600	27,000	15.0	12.2	4652492
	CHPF3642D6C*	G*VM961155DXA*	34,600	27,000	15.0	12.2	4652466
	CHPF3642D6C*	A*VM961155DXA*	34,600	27,000	15.0	12.2	4652465
	CHPF3642D6C*	A*VC80704BXA*	34,600	27,000	14.5	12.2	4589306
	CHPF3642D6C*	MBVC2000** -1A*	35,000	27,300	15.0	12.5	4588209
	CHPF3642D6C*	G*VC80704BXA*	34,600	27,000	14.5	12.2	4518955
	CHPF3642D6C*	MBE2000** -1B*	35,000	27,300	15.0	12.5	4100874
	CHPF3642D6C*	G*VC951155DXA*	34,600	27,000	15.0	12.2	4100758
	CHPF3642D6C*	A*VC951155DXA*	34,600	27,000	15.0	12.2	4100515
	CHPF3642D6C*+EEP		34,600	27,000	14.0	12.0	4100873
	CHPF3743D6B*	GME950805CXA*	34,400	26,800	14.5	12.2	4701116
	CHPF3743D6B*	G*VM960805CXA*	34,400	26,800	14.5	12.2	4655252
	CHPF3743D6B*	A*VM960805CXA*	34,400	26,800	14.5	12.2	4655251
	CHPF3743D6B*	A*VC950905CXA*	34,400	26,800	14.5	12.2	4589307
	CHPF3743D6B*	G*VC950905CXA*	34,400	26,800	14.5	12.2	4589167
	CHPF3743D6B*+EEP+TXV		34,600	27,000	14.5	12.2	4588196
	CSCF3642N6C*	A*VC80704BXA*	34,600	27,000	14.5	12.2	4589308
	CSCF3642N6C*	G*VC80704BXA*	34,600	27,000	14.5	12.2	4589168
	CSCF3642N6D*	G*VC80704BXA*	34,600	27,000	14.5	12.0	4767450
	CSCF3642N6D*	A*VC80704BXA*	34,600	27,000	14.5	12.0	4767449
	CSCF4860N6C*	GME950603BXA*	34,200	26,700	13.8	11.5	4703683
	CSCF4860N6C*	GME951005DXA*	34,600	27,000	14.5	12.2	4701142
	CSCF4860N6C*	A*VM961005DXA*	34,600	27,000	14.5	12.2	4655259
	CSCF4860N6C*	A*VM961155DXA*	34,600	27,000	14.5	12.2	4655257
	CSCF4860N6C*	G*VM960805DXA*	34,400	26,800	14.5	12.2	4655255
	CSCF4860N6C*	A*VM960805DXA*	34,400	26,800	14.5	12.2	4655254
	CSCF4860N6C*	G*VM960604CXA*	34,600	27,000	14.5	12.2	4652572
	CSCF4860N6C*	A*VM960604CXA*	34,600	27,000	14.5	12.2	4652570
	CSCF4860N6C*	G*VM961005DXA*	34,600	27,000	14.5	12.2	4652500
	CSCF4860N6C*	G*VM961155DXA*	34,600	27,000	14.5	12.2	4652473
	CSCF4860N6C*	A*VC951155DXA*	34,600	27,000	14.5	12.2	4589313
	CSCF4860N6C*	A*VC950704CXA*	34,600	27,000	14.5	12.2	4589312
	CSCF4860N6C*	A*VC81155CXA*	34,600	27,000	14.5	12.2	4589311
	CSCF4860N6C*	A*VC80905CXA*	34,600	27,000	14.5	12.2	4589310
	CSCF4860N6C*	G*VC81155CXA*	34,600	27,000	14.5	12.2	4518957
	CSCF4860N6C*	G*VC80905CXA*	34,600	27,000	14.5	12.2	4518956
	CSCF4860N6C*	G*VC951155DXA*	34,600	27,000	14.5	12.2	4100764
	CSCF4860N6C*	G*VC950704CXA*	34,600	27,000	14.5	12.2	4100722
	CSCF4860N6C*	G*E81155C**	34,600	27,000	15.0	12.5	4100564
	CSCF4860N6C*+EEP		34,600	27,000	14.0	12.0	4588193
	CSCF4860N6C*+EEP+TXV		35,000	27,300	14.5	12.2	4100900
	CSCF4860N6C*+TXV	GME950603BXA*	34,200	26,700	14.5	11.5	4703685
	CSCF4860N6C*+TXV	G*VM960604CXA*	34,600	27,000	15.0	12.2	4655269
	CSCF4860N6C*+TXV	G*VC950704CXA*	34,600	27,000	15.0	12.2	4588191
	CT*F4860*6A*	A*VC950915DXA*	34,600	27,000	15.0	12.5	4589315
	CT*F4860*6A*	A*VC950714CXA*	34,600	27,000	14.5	12.2	4589314
	CT*F4860*6A*	G*VC950915DXA*	34,600	27,000	15.0	12.5	4589174
	CT*F4860*6A*	G*VC950714CXA*	34,600	27,000	14.5	12.2	4589173

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0421A*	AEPF426016C*		40,000	31,600	15.0	12.5	4100776
	AR*F374316B*		40,000	31,600	14.5	12.2	4100785
	AR*F374316C*		40,000	31,600	14.5	12.2	4358297
	AR*F486016C*		40,000	31,600	14.5	12.2	4589175
	ASPF426016B*		40,000	31,600	15.0	12.5	4100800
	ASPF426016C*		40,000	31,600	15.0	12.5	4358298
	ASPF426016D*		40,000	31,600	15.0	12.5	4518959
	ASPF426016E*		40,000	31,600	15.0	12.5	4518960
	AVPTC426014A*		40,000	31,600	15.0	12.5	4589176
	CA*F3743*6A*+EEP+TXV		40,000	31,600	14.5	12.2	4589177
	CA*F3743*6A*+TXV	GME950805CXA*	39,500	31,200	14.5	12.0	4703734
	CA*F3743*6A*+TXV	G*VM960805CXA*	40,000	31,600	14.5	12.2	4655278
	CA*F3743*6A*+TXV	A*VM960805CXA*	40,000	31,600	14.5	12.2	4655277
	CA*F3743*6A*+TXV	G*VM960805DXA*	40,000	31,600	14.5	12.2	4652894
	CA*F3743*6A*+TXV	A*VM960805DXA*	40,000	31,600	14.5	12.2	4652893
	CA*F3743*6A*+TXV	A*VM961005DXA*	40,000	31,600	14.5	12.2	4652843
	CA*F3743*6A*+TXV	G*VM961005DXA*	40,000	31,600	14.5	12.2	4652842
	CA*F3743*6A*+TXV	A*VM961155DXA*	40,000	31,600	14.5	12.2	4652825
	CA*F3743*6A*+TXV	G*VM961155DXA*	40,000	31,600	14.5	12.2	4652824
	CA*F3743*6A*+TXV	A*VC950905CXA*	40,000	31,600	14.5	12.2	4589316
	CA*F3743*6A*+TXV	G*VC950905CXA*	40,000	31,600	14.5	12.2	4589178
	CA*F3743*6A*+TXV	G*VC950915DXA*	40,000	31,600	14.5	12.2	4518962
	CA*F3743*6A*+TXV	A*VC950915DXA*	40,000	31,600	14.5	12.2	4518961
	CA*F3743*6A*+TXV	G*VC951155DXA*	40,000	31,600	14.5	12.2	4100749
	CA*F3743*6A*+TXV	G*VC950905DXA*	40,000	31,600	14.5	12.2	4100730
	CA*F3743*6A*+TXV	A*VC951155DXA*	40,000	31,600	14.5	12.2	4100506
	CA*F3743*6A*+TXV	A*VC950905DXA*	40,000	31,600	14.5	12.2	4100487
	CA*F3743*6D*+EEP+TXV		40,000	31,600	14.5	12.2	4518963
	CA*F3743*6D*+TXV	GME950805CXA*	39,500	31,200	14.5	12.0	4703737
	CA*F3743*6D*+TXV	GME951005DXA*	40,000	31,600	14.5	12.2	4701078
	CA*F3743*6D*+TXV	G*VM960805DXA*	40,000	31,600	14.5	12.2	4652900
	CA*F3743*6D*+TXV	A*VM960805DXA*	40,000	31,600	14.5	12.2	4652899
	CA*F3743*6D*+TXV	G*VM960805CXA*	40,000	31,600	14.5	12.2	4652863
	CA*F3743*6D*+TXV	A*VM960805CXA*	40,000	31,600	14.5	12.2	4652862
	CA*F3743*6D*+TXV	A*VM961005DXA*	40,000	31,600	14.5	12.2	4652847
	CA*F3743*6D*+TXV	G*VM961005DXA*	40,000	31,600	14.5	12.2	4652846
	CA*F3743*6D*+TXV	A*VM961155DXA*	40,000	31,600	14.5	12.2	4652829
	CA*F3743*6D*+TXV	G*VM961155DXA*	40,000	31,600	14.5	12.2	4652828
	CA*F3743*6D*+TXV	G*VC951155DXA*	40,000	31,600	14.5	12.2	4518971
	CA*F3743*6D*+TXV	G*VC950915DXA*	40,000	31,600	14.5	12.2	4518970
	CA*F3743*6D*+TXV	G*VC950905DXA*	40,000	31,600	14.5	12.2	4518969
	CA*F3743*6D*+TXV	G*VC950905CXA*	40,000	31,600	14.5	12.2	4518968
	CA*F3743*6D*+TXV	A*VC951155DXA*	40,000	31,600	14.5	12.2	4518967
	CA*F3743*6D*+TXV	A*VC950915DXA*	40,000	31,600	14.5	12.2	4518966
	CA*F3743*6D*+TXV	A*VC950905DXA*	40,000	31,600	14.5	12.2	4518965
	CA*F3743*6D*+TXV	A*VC950905CXA*	40,000	31,600	14.5	12.2	4518964
	CA*F4860*6B*	A*VC81155CXA*	39,500	31,200	14.0	12.0	4589319
	CA*F4860*6B*	A*VC80905CXA*	39,500	31,200	14.0	12.0	4589318
	CA*F4860*6B*	A*VC950905CXA*	40,000	31,600	14.7	12.5	4589317
	CA*F4860*6B*	G*VC950905CXA*	40,000	31,600	14.7	12.5	4589179
CA*F4860*6B*	G*VC950915DXA*	40,000	31,600	14.7	12.5	4518977	
CA*F4860*6B*	G*VC950714CXA*	40,000	31,600	14.0	12.0	4518976	

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0421A* (cont.)	CA*F4860*6B*	G*VC81155CXA*	39,500	31,200	14.0	12.0	4518975
	CA*F4860*6B*	G*VC80905CXA*	39,500	31,200	14.0	12.0	4518974
	CA*F4860*6B*	A*VC950915DXA*	40,000	31,600	14.7	12.5	4518973
	CA*F4860*6B*	A*VC950714CXA*	40,000	31,600	14.0	12.0	4518972
	CA*F4860*6B*	MBVC2000** -1A*	40,000	31,600	15.0	12.5	4100846
	CA*F4860*6B*	MBE2000** -1B*	40,000	31,600	15.0	12.5	4100844
	CA*F4860*6B*	G*VC951155DXA*	40,000	31,600	14.7	12.5	4100751
	CA*F4860*6B*	G*VC950905DXA*	40,000	31,600	14.7	12.5	4100732
	CA*F4860*6B*	G*VC950704CXA*	40,000	31,600	14.0	12.0	4100707
	CA*F4860*6B*	A*VC951155DXA*	40,000	31,600	14.7	12.5	4100508
	CA*F4860*6B*	A*VC950905DXA*	40,000	31,600	14.7	12.5	4100490
	CA*F4860*6B*	A*VC950704CXA*	40,000	31,600	14.0	12.0	4100467
	CA*F4860*6B*+EEP		40,000	31,600	14.0	12.0	4100839
	CA*F4860*6B*+TXV	GME950805CXA*	39,500	31,200	14.5	12.0	4703739
	CA*F4860*6D*	GME951005DXA*	40,000	31,600	14.7	12.5	4701085
	CA*F4860*6D*	G*VM960805CXA*	40,000	31,600	14.7	12.5	4655280
	CA*F4860*6D*	A*VM960805CXA*	40,000	31,600	14.7	12.5	4655279
	CA*F4860*6D*	G*VM960805DXA*	40,000	31,600	14.7	12.5	4652906
	CA*F4860*6D*	A*VM960805DXA*	40,000	31,600	14.7	12.5	4652905
	CA*F4860*6D*	G*VM960604CXA*	40,000	31,600	14.0	12.0	4652876
	CA*F4860*6D*	A*VM960604CXA*	40,000	31,600	14.0	12.0	4652875
	CA*F4860*6D*	G*VM961005DXA*	40,000	31,600	14.7	12.5	4652851
	CA*F4860*6D*	A*VM961005DXA*	40,000	31,600	14.7	12.5	4652850
	CA*F4860*6D*	G*VM961155DXA*	40,000	31,600	14.7	12.5	4652833
	CA*F4860*6D*	A*VM961155DXA*	40,000	31,600	14.7	12.5	4652832
	CA*F4860*6D*	A*VC81155CXA*	39,500	31,200	14.0	12.0	4589322
	CA*F4860*6D*	A*VC80905CXA*	39,500	31,200	14.0	12.0	4589321
	CA*F4860*6D*	A*VC950905CXA*	40,000	31,600	14.7	12.5	4589320
	CA*F4860*6D*	G*VC950905CXA*	40,000	31,600	14.7	12.5	4589180
	CA*F4860*6D*	G*VC950915DXA*	40,000	31,600	14.7	12.5	4518983
	CA*F4860*6D*	G*VC950714CXA*	40,000	31,600	14.0	12.0	4518982
	CA*F4860*6D*	G*VC81155CXA*	39,500	31,200	14.0	12.0	4518981
	CA*F4860*6D*	G*VC80905CXA*	39,500	31,200	14.0	12.0	4518980
	CA*F4860*6D*	A*VC950915DXA*	40,000	31,600	14.7	12.5	4518979
	CA*F4860*6D*	A*VC950714CXA*	40,000	31,600	14.0	12.0	4518978
	CA*F4860*6D*	MBVC2000** -1A*	40,000	31,600	15.0	12.5	4100854
	CA*F4860*6D*	MBE2000** -1B*	40,000	31,600	15.0	12.5	4100850
	CA*F4860*6D*	G*VC951155DXA*	40,000	31,600	14.7	12.5	4100755
	CA*F4860*6D*	G*VC950905DXA*	40,000	31,600	14.7	12.5	4100735
	CA*F4860*6D*	G*VC950704CXA*	40,000	31,600	14.0	12.0	4100710
	CA*F4860*6D*	A*VC951155DXA*	40,000	31,600	14.7	12.5	4100512
	CA*F4860*6D*	A*VC950905DXA*	40,000	31,600	14.7	12.5	4100495
	CA*F4860*6D*	A*VC950704CXA*	40,000	31,600	14.0	12.0	4100470
	CA*F4860*6D*+EEP		40,000	31,600	14.0	12.0	4589181
	CA*F4860*6D*+TXV	GME950805CXA*	39,500	31,200	14.5	12.0	4703743
	CA*F4961*6A*+EEP		40,000	31,600	14.5	12.2	4100857
	CA*F4961*6D*+EEP		40,000	31,600	14.5	12.2	4589182
	CHPF3743D6B*+EEP+TXV		40,000	31,600	14.5	12.2	4100875
	CHPF4860D6D*	GME951005DXA*	40,000	31,600	15.0	12.5	4701120
	CHPF4860D6D*	G*VM960805CXA*	40,000	31,600	15.0	12.5	4655282
CHPF4860D6D*	A*VM960805CXA*	40,000	31,600	15.0	12.5	4655281	

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0421A* (cont.)	CHPF4860D6D*	G*VM960805DXA*	40,000	31,600	15.0	12.5	4652913
	CHPF4860D6D*	A*VM960805DXA*	40,000	31,600	15.0	12.5	4652912
	CHPF4860D6D*	G*VM960604CXA*	40,000	31,600	14.0	12.0	4652885
	CHPF4860D6D*	A*VM960604CXA*	40,000	31,600	14.0	12.0	4652884
	CHPF4860D6D*	G*VM961005DXA*	40,000	31,600	15.0	12.5	4652855
	CHPF4860D6D*	A*VM961005DXA*	40,000	31,600	15.0	12.5	4652854
	CHPF4860D6D*	G*VM961155DXA*	40,000	31,600	15.0	12.5	4652837
	CHPF4860D6D*	A*VM961155DXA*	40,000	31,600	15.0	12.5	4652836
	CHPF4860D6D*	A*VC81155CXA*	39,500	31,200	14.0	12.0	4589325
	CHPF4860D6D*	A*VC80905CXA*	39,500	31,200	14.0	12.0	4589324
	CHPF4860D6D*	A*VC950905CXA*	40,000	31,600	15.0	12.5	4589323
	CHPF4860D6D*	G*VC950905CXA*	40,000	31,600	15.0	12.5	4589183
	CHPF4860D6D*	G*VC81155CXA*	39,500	31,200	14.0	12.0	4518987
	CHPF4860D6D*	G*VC80905CXA*	39,500	31,200	14.0	12.0	4518986
	CHPF4860D6D*	MBVC2000** -1A*	40,000	31,600	15.0	12.5	4100889
	CHPF4860D6D*	MBE2000** -1B*	40,000	31,600	15.0	12.5	4100886
	CHPF4860D6D*	G*VC951155DXA*	40,000	31,600	15.0	12.5	4100761
	CHPF4860D6D*	G*VC950905DXA*	40,000	31,600	15.0	12.5	4100739
	CHPF4860D6D*	G*VC950704CXA*	40,000	31,600	14.0	12.0	4100718
	CHPF4860D6D*	A*VC951155DXA*	40,000	31,600	15.0	12.5	4100516
	CHPF4860D6D*	A*VC950905DXA*	40,000	31,600	15.0	12.5	4100498
	CHPF4860D6D*	A*VC950704CXA*	40,000	31,600	14.0	12.0	4100478
	CHPF4860D6D*+EEP		40,000	31,600	14.0	12.0	4100881
	CHPF4860D6D*+TXV	GME950805CXA*	39,500	31,200	15.0	12.0	4703748
	CSCF4860N6C*	GME951005DXA*	40,000	31,600	15.0	12.5	4701143
	CSCF4860N6C*	A*VM960805DXA*	40,000	31,600	15.0	12.5	4655286
	CSCF4860N6C*	G*VM960805CXA*	40,000	31,600	15.0	12.5	4655284
	CSCF4860N6C*	A*VM960805CXA*	40,000	31,600	15.0	12.5	4655283
	CSCF4860N6C*	A*VM961005DXA*	40,000	31,600	15.0	12.5	4655275
	CSCF4860N6C*	A*VM961155DXA*	40,000	31,600	15.0	12.5	4655273
	CSCF4860N6C*	G*VM960805DXA*	40,000	31,600	15.0	12.5	4652918
	CSCF4860N6C*	A*VM960604CXA*	40,000	31,600	14.5	12.2	4652891
	CSCF4860N6C*	G*VM960604CXA*	40,000	31,600	14.5	12.2	4652889
	CSCF4860N6C*	G*VM961005DXA*	40,000	31,600	15.0	12.5	4652858
	CSCF4860N6C*	G*VM961155DXA*	40,000	31,600	15.0	12.5	4652840
	CSCF4860N6C*	A*VC951155DXA*	40,000	31,600	15.0	12.5	4589332
	CSCF4860N6C*	A*VC950905DXA*	40,000	31,600	15.0	12.5	4589330
	CSCF4860N6C*	A*VC950905CXA*	40,000	31,600	15.0	12.5	4589329
	CSCF4860N6C*	A*VC950704CXA*	40,000	31,600	14.5	12.2	4589328
	CSCF4860N6C*	A*VC81155CXA*	39,500	31,200	14.0	12.0	4589327
	CSCF4860N6C*	A*VC80905CXA*	39,500	31,200	14.0	12.0	4589326
	CSCF4860N6C*	G*VC950905CXA*	40,000	31,600	15.0	12.5	4589184
	CSCF4860N6C*	G*VC81155CXA*	39,500	31,200	14.0	12.0	4518991
	CSCF4860N6C*	G*VC80905CXA*	39,500	31,200	14.0	12.0	4518990
	CSCF4860N6C*	MBVC2000** -1A*	40,000	31,600	15.0	12.5	4100905
	CSCF4860N6C*	MBE2000** -1B*	40,000	31,600	15.0	12.5	4100903
	CSCF4860N6C*	G*VC951155DXA*	40,000	31,600	15.0	12.5	4100765
	CSCF4860N6C*	G*VC950905DXA*	40,000	31,600	15.0	12.5	4100742
	CSCF4860N6C*	G*VC950704CXA*	40,000	31,600	14.5	12.2	4100723
	CSCF4860N6C*+EEP		40,000	31,600	14.0	12.0	4100897
CSCF4860N6C*+EEP+TXV		40,000	31,600	14.5	12.2	4100901	
CSCF4860N6C*+TXV	GME950805CXA*	39,500	31,200	15.0	12.0	4703751	

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0481A*	ADPF486016B*		45,000	35,100	13.5	11.5	4100768
	ADPF486016C*		45,000	35,100	13.5	11.5	4358258
	AEPF426016C*		46,000	35,900	14.5	12.2	4100777
	AR*F374316B*		45,500	35,500	14.0	12.0	4100786
	AR*F374316C*		45,500	35,500	14.0	12.0	4358299
	AR*F486016B*		45,000	35,100	14.0	12.0	4100789
	AR*F486016C*		45,000	35,100	14.0	12.0	4100791
	AR*F496116A*		45,000	35,100	14.0	12.0	4100793
	AR*F496116C*		45,000	35,100	14.0	12.0	4358259
	ASPF426016B*		47,000	36,700	15.0	12.5	4100801
	ASPF426016B*+TXV		46,000	35,900	15.0	12.0	4100803
	ASPF426016C*		47,000	36,700	15.0	12.5	4358300
	ASPF426016C*+TXV		46,000	35,900	15.0	12.0	4358301
	ASPF426016D*		47,000	36,700	15.0	12.5	4589185
	AT*F374316A*		46,000	35,900	14.0	12.0	4100811
	AVPTC426014A*		46,000	35,900	14.5	12.2	4589186
	CA*F4860*6B*	G*VC90905DXA*	45,500	35,500	15.0	12.5	4589187
	CA*F4860*6B*	MBVC2000** -1A*	46,000	35,900	15.0	13.0	4100847
	CA*F4860*6B*	MBE2000** -1B*	46,000	35,900	15.0	13.0	4100842
	CA*F4860*6B*	G*VC951155DXA*	45,500	35,500	15.0	12.5	4100752
	CA*F4860*6B*	G*VC950905DXA*	45,500	35,500	15.0	12.5	4100733
	CA*F4860*6B*	A*VC951155DXA*	45,500	35,500	15.0	12.5	4100509
	CA*F4860*6B*	A*VC950905DXA*	45,500	35,500	15.0	12.5	4100491
	CA*F4860*6B*	A*VC90905DXA*	45,500	35,500	15.0	12.5	4100435
	CA*F4860*6B*+EEP		46,000	35,900	14.0	12.0	4100840
	CA*F4860*6B*+TXV	G*E81155C**	46,000	35,900	14.5	12.0	4100556
	CA*F4860*6B*+TXV	G*E80905C**	45,500	35,500	14.5	12.0	4100544
	CA*F4860*6D*	G*VM960805CXA*	45,500	35,500	15.0	12.5	4655293
	CA*F4860*6D*	A*VM960805CXA*	45,500	35,500	15.0	12.5	4655292
	CA*F4860*6D*	G*VM960805DXA*	45,500	35,500	15.0	12.5	4653014
	CA*F4860*6D*	A*VM960805DXA*	45,500	35,500	15.0	12.5	4653013
	CA*F4860*6D*	G*VM961005DXA*	45,500	35,500	15.0	12.5	4652979
	CA*F4860*6D*	A*VM961005DXA*	45,500	35,500	15.0	12.5	4652978
	CA*F4860*6D*	G*VM961155DXA*	45,500	35,500	15.0	12.5	4652961
	CA*F4860*6D*	A*VM961155DXA*	45,500	35,500	15.0	12.5	4652960
	CA*F4860*6D*	A*VC950905CXA*	45,500	35,500	15.0	12.5	4589333
	CA*F4860*6D*	G*VC950905CXA*	45,500	35,500	15.0	12.5	4589189
	CA*F4860*6D*	G*VC90905DXA*	45,500	35,500	15.0	12.5	4589188
	CA*F4860*6D*	G*VC950915DXA*	45,500	35,500	15.0	12.5	4518995
	CA*F4860*6D*	A*VC950915DXA*	45,500	35,500	15.0	12.5	4518994
	CA*F4860*6D*	MBVC2000** -1A*	46,000	35,900	15.0	13.0	4100855
	CA*F4860*6D*	MBE2000** -1B*	46,000	35,900	15.0	13.0	4100851
	CA*F4860*6D*	G*VC951155DXA*	45,500	35,500	15.0	12.5	4100756
	CA*F4860*6D*	G*VC950905DXA*	45,500	35,500	15.0	12.5	4100736
	CA*F4860*6D*	A*VC951155DXA*	45,500	35,500	15.0	12.5	4100513
	CA*F4860*6D*	A*VC950905DXA*	45,500	35,500	15.0	12.5	4100496
	CA*F4860*6D*	A*VC90905DXA*	45,500	35,500	15.0	12.5	4100438
	CA*F4860*6D*+EEP		45,500	35,500	14.0	12.0	4589190
	CA*F4860*6D*+EEP+TXV		45,500	35,500	14.0	12.0	4589191
	CA*F4860*6D*+TXV	GME950805CXA*	45,000	35,100	15.0	12.5	4703755
	CA*F4860*6D*+TXV	GME951005DXA*	45,000	35,100	15.0	12.0	4703687
	CA*F4860*6D*+TXV	G*E81155C**	45,500	35,500	14.5	12.0	4100558
CA*F4860*6D*+TXV	G*E80905C**	45,000	35,100	14.5	12.0	4100546	

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0481A* (cont.)	CA*F4961*6A*+EEP+TXV		46,000	35,900	14.5	12.0	4100858
	CA*F4961*6A*+TVX	MBVC2000** -1A*	46,000	35,900	15.0	12.5	4589193
	CA*F4961*6A*+TVX	MBE2000** -1B*	46,000	35,900	15.0	12.5	4589192
	CA*F4961*6D*+EEP+TXV		46,000	35,900	14.5	12.0	4518996
	CA*F4961*6D*+TVX	MBVC2000** -1A*	46,000	35,900	15.0	12.5	4518997
	CHPF4860D6D*	G*VM960805CXA*	45,500	35,500	15.0	12.5	4655295
	CHPF4860D6D*	A*VM960805CXA*	45,500	35,500	15.0	12.5	4655294
	CHPF4860D6D*	G*VM960805DXA*	45,500	35,500	15.0	12.5	4653020
	CHPF4860D6D*	A*VM960805DXA*	45,500	35,500	15.0	12.5	4653019
	CHPF4860D6D*	A*VM961005DXA*	45,500	35,500	15.0	12.5	4652988
	CHPF4860D6D*	G*VM961005DXA*	45,500	35,500	15.0	12.5	4652987
	CHPF4860D6D*	A*VM961155DXA*	45,500	35,500	15.0	12.5	4652970
	CHPF4860D6D*	G*VM961155DXA*	45,500	35,500	15.0	12.5	4652969
	CHPF4860D6D*	A*VC90905DXA*	45,500	35,500	15.0	12.5	4589335
	CHPF4860D6D*	A*VC950905CXA*	45,500	35,500	15.0	12.5	4589334
	CHPF4860D6D*	G*VC950905CXA*	45,500	35,500	15.0	12.5	4589194
	CHPF4860D6D*	MBVC2000** -1A*	46,000	35,900	15.5	13.0	4100890
	CHPF4860D6D*	MBE2000** -1B*	46,000	35,900	15.0	13.0	4100887
	CHPF4860D6D*	G*VC951155DXA*	45,500	35,500	15.0	12.5	4100762
	CHPF4860D6D*	G*VC950905DXA*	45,500	35,500	15.0	12.5	4100740
	CHPF4860D6D*	G*VC90905DXA*	45,500	35,500	15.0	12.5	4100683
	CHPF4860D6D*	A*VC951155DXA*	45,500	35,500	15.0	12.5	4100517
	CHPF4860D6D*	A*VC950905DXA*	45,500	35,500	15.0	12.5	4100499
	CHPF4860D6D*+EEP		46,000	35,900	14.0	12.0	4100882
	CHPF4860D6D*+EEP+TXV		46,000	35,900	14.5	12.0	4100884
	CHPF4860D6D*+TXV	GME950805CXA*	45,000	35,100	15.0	12.5	4703757
	CHPF4860D6D*+TXV	GME951005DXA*	45,000	35,100	15.0	12.0	4703689
	CHPF4860D6D*+TXV	G*VC81155CXA*	45,500	35,500	14.5	12.0	4519003
	CHPF4860D6D*+TXV	G*VC80905CXA*	45,500	35,500	15.0	12.0	4519002
	CHPF4860D6D*+TXV	A*VC81155CXA*	45,500	35,500	14.5	12.0	4519001
	CHPF4860D6D*+TXV	A*VC80905CXA*	45,500	35,500	15.0	12.0	4519000
	CHPF4860D6D*+TXV	G*E81155C**	45,500	35,500	14.5	12.0	4100562
	CHPF4860D6D*+TXV	G*E80905C**	45,500	35,500	14.5	12.0	4100550
	CSCF4860N6C*	GME951005DXA*	45,500	35,500	14.5	12.3	4701144
	CSCF4860N6C*	G*VM960805CXA*	45,500	35,500	14.5	12.3	4655297
	CSCF4860N6C*	A*VM960805CXA*	45,500	35,500	14.5	12.3	4655296
	CSCF4860N6C*	A*VM961005DXA*	45,500	35,500	14.5	12.3	4655290
	CSCF4860N6C*	A*VM961155DXA*	45,500	35,500	14.5	12.3	4655288
	CSCF4860N6C*	G*VM960805DXA*	45,500	35,500	14.5	12.3	4653026
	CSCF4860N6C*	A*VM960805DXA*	45,500	35,500	14.5	12.3	4653025
	CSCF4860N6C*	G*VM961005DXA*	45,500	35,500	14.5	12.3	4652993
	CSCF4860N6C*	G*VM961155DXA*	45,500	35,500	14.5	12.3	4652975
	CSCF4860N6C*	A*VC951155DXA*	45,500	35,500	14.5	12.3	4589338
	CSCF4860N6C*	A*VC950905DXA*	45,500	35,500	14.5	12.3	4589337
	CSCF4860N6C*	A*VC950905CXA*	45,500	35,500	14.5	12.3	4589336
	CSCF4860N6C*	G*VC950905CXA*	45,500	35,500	14.5	12.3	4589195
	CSCF4860N6C*	G*VC81155CXA*	45,500	35,500	14.5	12.0	4519008
	CSCF4860N6C*	G*VC80905CXA*	45,500	35,500	15.0	12.0	4519007
	CSCF4860N6C*	A*VC81155CXA*	45,500	35,500	14.5	12.0	4519005
	CSCF4860N6C*	A*VC80905CXA*	45,500	35,500	15.0	12.0	4519004
	CSCF4860N6C*	G*VC951155DXA*	45,500	35,500	14.5	12.3	4100766
	CSCF4860N6C*	G*VC950905DXA*	45,500	35,500	14.5	12.3	4100743
	CSCF4860N6C*+EEP		46,000	35,900	14.0	12.0	4100898
	CSCF4860N6C*+TXV	GME950805CXA*	45,000	35,100	14.5	12.3	4703759

See Notes on Page 42.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0601A*	AEPF426016C*		56,000	40,900	14.3	11.7	4100778
	AR*F374316B*		57,000	41,600	13.5	11.5	4100787
	AR*F374316C*		57,000	41,600	13.5	11.5	4358260
	AR*F486016B*		56,000	40,900	13.5	11.5	4100790
	AR*F486016C*		56,000	40,900	13.5	11.5	4100792
	AR*F496116A*		56,000	40,900	13.5	11.5	4100794
	AR*F496116A*+TXV		56,000	40,900	13.5	11.5	4100795
	AR*F496116C*		56,000	40,900	13.5	11.5	4358261
	AR*F496116C*+TXV		56,000	40,900	13.5	11.5	4358262
	ASPF426016B*		57,000	41,600	14.5	12.0	4100802
	ASPF426016B*+TXV		56,000	40,900	15.0	12.5	4100804
	ASPF426016C*		57,000	41,600	14.5	12.0	4358263
	ASPF426016C*+TXV		56,000	40,900	15.0	12.5	4358264
	ASPF426016D*		57,000	41,600	14.5	12.0	4519010
	ASPF426016D*+TXV		56,000	40,900	15.0	12.5	4519011
	ASPF426016E*		57,000	41,600	14.5	12.0	4519012
	ASPF426016E*+TXV		56,000	40,900	15.0	12.5	4519013
	AT*F374316A*		57,000	41,600	13.5	11.5	4100812
	AVPTC426014A*		56,000	40,900	15.0	12.5	4519014
	CA*F4860*6B*	A*VC950915DXA*	56,000	40,900	13.5	11.5	4589340
	CA*F4860*6B*	A*VC950905CXA*	56,000	40,900	13.5	11.5	4589339
	CA*F4860*6B*	G*VC950915DXA*	56,000	40,900	13.5	11.5	4589198
	CA*F4860*6B*	G*VC950905DXA*	56,000	40,900	13.5	11.5	4589197
	CA*F4860*6B*	G*VC950905CXA*	56,000	40,900	13.5	11.5	4589196
	CA*F4860*6B*	MBVC2000** -1A*	56,000	40,900	15.0	12.5	4100848
	CA*F4860*6B*	MBR2000** -1	56,000	40,900	14.0	12.0	4100845
	CA*F4860*6B*	MBE2000** -1B*	56,000	40,900	15.0	12.5	4100843
	CA*F4860*6B*	G*VC951155DXA*	56,000	40,900	13.5	11.5	4100753
	CA*F4860*6B*	G*VC90905DXA*	56,000	40,900	13.5	11.5	4100680
	CA*F4860*6B*	A*VC951155DXA*	56,000	40,900	13.5	11.5	4100510
	CA*F4860*6B*	A*VC950905DXA*	56,000	40,900	13.5	11.5	4100492
	CA*F4860*6B*	A*VC90905DXA*	56,000	40,900	13.5	11.5	4100436
	CA*F4860*6B*+EEP		56,000	40,900	14.0	12.0	4100841
	CA*F4860*6D*	G*VM960805DXA*	56,000	40,900	13.5	11.5	4655306
	CA*F4860*6D*	G*VM960805CXA*	56,000	40,900	13.5	11.5	4655300
	CA*F4860*6D*	A*VM960805CXA*	56,000	40,900	13.5	11.5	4655299
	CA*F4860*6D*	A*VM960805DXA*	56,000	40,900	13.5	11.5	4653232
	CA*F4860*6D*	G*VM961005DXA*	56,000	40,900	13.5	11.5	4653188
	CA*F4860*6D*	A*VM961005DXA*	56,000	40,900	13.5	11.5	4653187
	CA*F4860*6D*	G*VM961155DXA*	56,000	40,900	13.5	11.5	4653160
	CA*F4860*6D*	A*VM961155DXA*	56,000	40,900	13.5	11.5	4653159
	CA*F4860*6D*	A*VC950905CXA*	56,000	40,900	13.5	11.5	4589341
	CA*F4860*6D*	G*VC950915DXA*	56,000	40,900	13.5	11.5	4589203
	CA*F4860*6D*	G*VC950905DXA*	56,000	40,900	13.5	11.5	4589202
	CA*F4860*6D*	G*VC950905CXA*	56,000	40,900	13.5	11.5	4589201
	CA*F4860*6D*	A*VC950915DXA*	56,000	40,900	13.5	11.5	4519015
	CA*F4860*6D*	MBVC2000** -1A*	56,000	40,900	15.0	12.5	4100856
	CA*F4860*6D*	MBR2000** -1	56,000	40,900	14.0	12.0	4100853
	CA*F4860*6D*	MBE2000** -1B*	56,000	40,900	15.0	12.5	4100852

See Notes on Page 42.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0601A* (cont.)	CA*F4860*6D*	G*VC951155DXA*	56,000	40,900	13.5	11.5	4100757
	CA*F4860*6D*	G*VC90905DXA*	56,000	40,900	13.5	11.5	4100681
	CA*F4860*6D*	A*VC951155DXA*	56,000	40,900	13.5	11.5	4100514
	CA*F4860*6D*	A*VC950905DXA*	56,000	40,900	13.5	11.5	4100497
	CA*F4860*6D*	A*VC90905DXA*	56,000	40,900	13.5	11.5	4100439
	CA*F4961*6A*+EEP+TXV		56,000	40,900	14.5	12.0	4100859
	CA*F4961*6A*+TXV	A*VC81155CXA*	57,000	41,600	14.5	12.3	4589343
	CA*F4961*6A*+TXV	A*VC80905CXA*	57,000	41,600	14.5	12.3	4589342
	CA*F4961*6A*+TXV	G*VC81155CXA*	57,000	41,600	14.5	12.3	4589206
	CA*F4961*6A*+TXV	G*VC80905CXA*	57,000	41,600	14.5	12.3	4589205
	CA*F4961*6D*+EEP+TXV		56,000	40,900	14.5	12.0	4519016
	CA*F4961*6D*+TXV	G*VC81155CXA*	57,000	41,600	14.5	12.3	4519020
	CA*F4961*6D*+TXV	G*VC80905CXA*	57,000	41,600	14.5	12.3	4519019
	CA*F4961*6D*+TXV	A*VC81155CXA*	57,000	41,600	14.5	12.3	4519018
	CA*F4961*6D*+TXV	A*VC80905CXA*	57,000	41,600	14.5	12.3	4519017
	CHPF4860D6D*	G*VM960805CXA*	56,000	40,900	13.5	11.5	4655303
	CHPF4860D6D*	A*VM960805CXA*	56,000	40,900	13.5	11.5	4655302
	CHPF4860D6D*	G*VM960805DXA*	56,000	40,900	13.5	11.5	4653241
	CHPF4860D6D*	A*VM960805DXA*	56,000	40,900	13.5	11.5	4653240
	CHPF4860D6D*	G*VM961005DXA*	56,000	40,900	13.5	11.5	4653204
	CHPF4860D6D*	A*VM961005DXA*	56,000	40,900	13.5	11.5	4653203
	CHPF4860D6D*	G*VM961155DXA*	56,000	40,900	13.5	11.5	4653176
	CHPF4860D6D*	A*VM961155DXA*	56,000	40,900	13.5	11.5	4653175
	CHPF4860D6D*	A*VC950905CXA*	56,000	40,900	13.5	11.5	4589345
	CHPF4860D6D*	MBVC2000** -1A*	56,000	40,900	15.0	12.5	4589212
	CHPF4860D6D*	G*VC950905CXA*	56,000	40,900	13.5	11.5	4589209
	CHPF4860D6D*	G*VC90905DXA*	56,000	40,900	13.5	11.5	4589208
	CHPF4860D6D*	MBR2000** -1	56,000	40,900	14.0	12.0	4100888
	CHPF4860D6D*	G*VC951155DXA*	56,000	40,900	13.5	11.5	4100763
	CHPF4860D6D*	G*VC950905DXA*	56,000	40,900	13.5	11.5	4100741
	CHPF4860D6D*	A*VC951155DXA*	56,000	40,900	13.5	11.5	4100518
	CHPF4860D6D*	A*VC950905DXA*	56,000	40,900	13.5	11.5	4100500
	CHPF4860D6D*	A*VC90905DXA*	56,000	40,900	13.5	11.5	4100440
	CHPF4860D6D*+EEP		56,000	40,900	14.0	12.0	4100883
	CHPF4860D6D*+EEP+TXV		56,000	40,900	14.5	12.0	4100885
	CHPF4860D6D*+TXV	G*VC81155CXA*	57,000	41,600	14.5	12.3	4519026
	CHPF4860D6D*+TXV	G*VC80905CXA*	57,000	41,600	14.5	12.3	4519025
	CHPF4860D6D*+TXV	A*VC81155CXA*	57,000	41,600	14.5	12.3	4519024
	CHPF4860D6D*+TXV	A*VC80905CXA*	57,000	41,600	14.5	12.3	4519023
	CSCF4860N6C*	G*VM960805CXA*	56,000	40,900	13.5	11.5	4655305
	CSCF4860N6C*	A*VM960805CXA*	56,000	40,900	13.5	11.5	4655304
	CSCF4860N6C*	G*VM960805DXA*	56,000	40,900	13.5	11.5	4653249
	CSCF4860N6C*	A*VM960805DXA*	56,000	40,900	13.5	11.5	4653248
	CSCF4860N6C*	G*VM961005DXA*	56,000	40,900	13.5	11.5	4653210
	CSCF4860N6C*	A*VM961005DXA*	56,000	40,900	13.5	11.5	4653209
	CSCF4860N6C*	G*VM961155DXA*	56,000	40,900	13.5	11.5	4653182
	CSCF4860N6C*	A*VM961155DXA*	56,000	40,900	13.5	11.5	4653181
	CSCF4860N6C*	A*VC950905CXA*	56,000	40,900	13.5	11.5	4589346
	CSCF4860N6C*	G*VC950905CXA*	56,000	40,900	13.5	11.5	4589214

See Notes on Page 42.

## AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)		SEER <sup>1</sup>	EER <sup>2</sup>	AHRI
	COILS & AIR HANDLERS	FURNACES & BLOWERS	TOTAL	SENSIBLE			
GSX14 0601A* (cont.)	CSCF4860N6C*	G*VC90905DXA*	56,000	40,900	13.5	11.5	4589213
	CSCF4860N6C*	MBVC2000**-1A*	56,000	40,900	15.0	12.0	4100906
	CSCF4860N6C*	MBR2000**-1	56,000	40,900	14.0	12.0	4100904
	CSCF4860N6C*	MBE2000**-1B*	56,000	40,900	15.0	12.0	4100902
	CSCF4860N6C*	G*VC951155DXA*	56,000	40,900	13.5	11.5	4100767
	CSCF4860N6C*	G*VC950905DXA*	56,000	40,900	13.5	11.5	4100744
	CSCF4860N6C*	A*VC951155DXA*	56,000	40,900	13.5	11.5	4100519
	CSCF4860N6C*	A*VC950905DXA*	56,000	40,900	13.5	11.5	4100501
	CSCF4860N6C*	A*VC90905DXA*	56,000	40,900	13.5	11.5	4100441
	CSCF4860N6C*+EEP		56,000	40,900	14.0	12.0	4100899


<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

**NOTES**


- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or what is specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

## DIMENSIONS

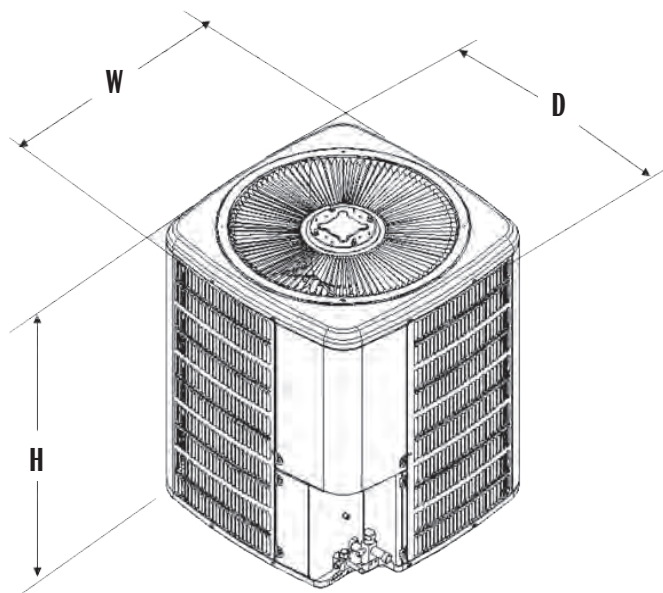

MODEL	DIMENSIONS		
	W"	D"	H"
GSX140181A	26	26	27½
GSX140241A	26	26	32½
GSX140301A	29	29	32½
GSX140361A	29	29	32½
GSX140421A	29	29	38¼
GSX140481A	35½	35½	38¼
GSX140601A	35½	35½	38¼

# WIRING DIAGRAM

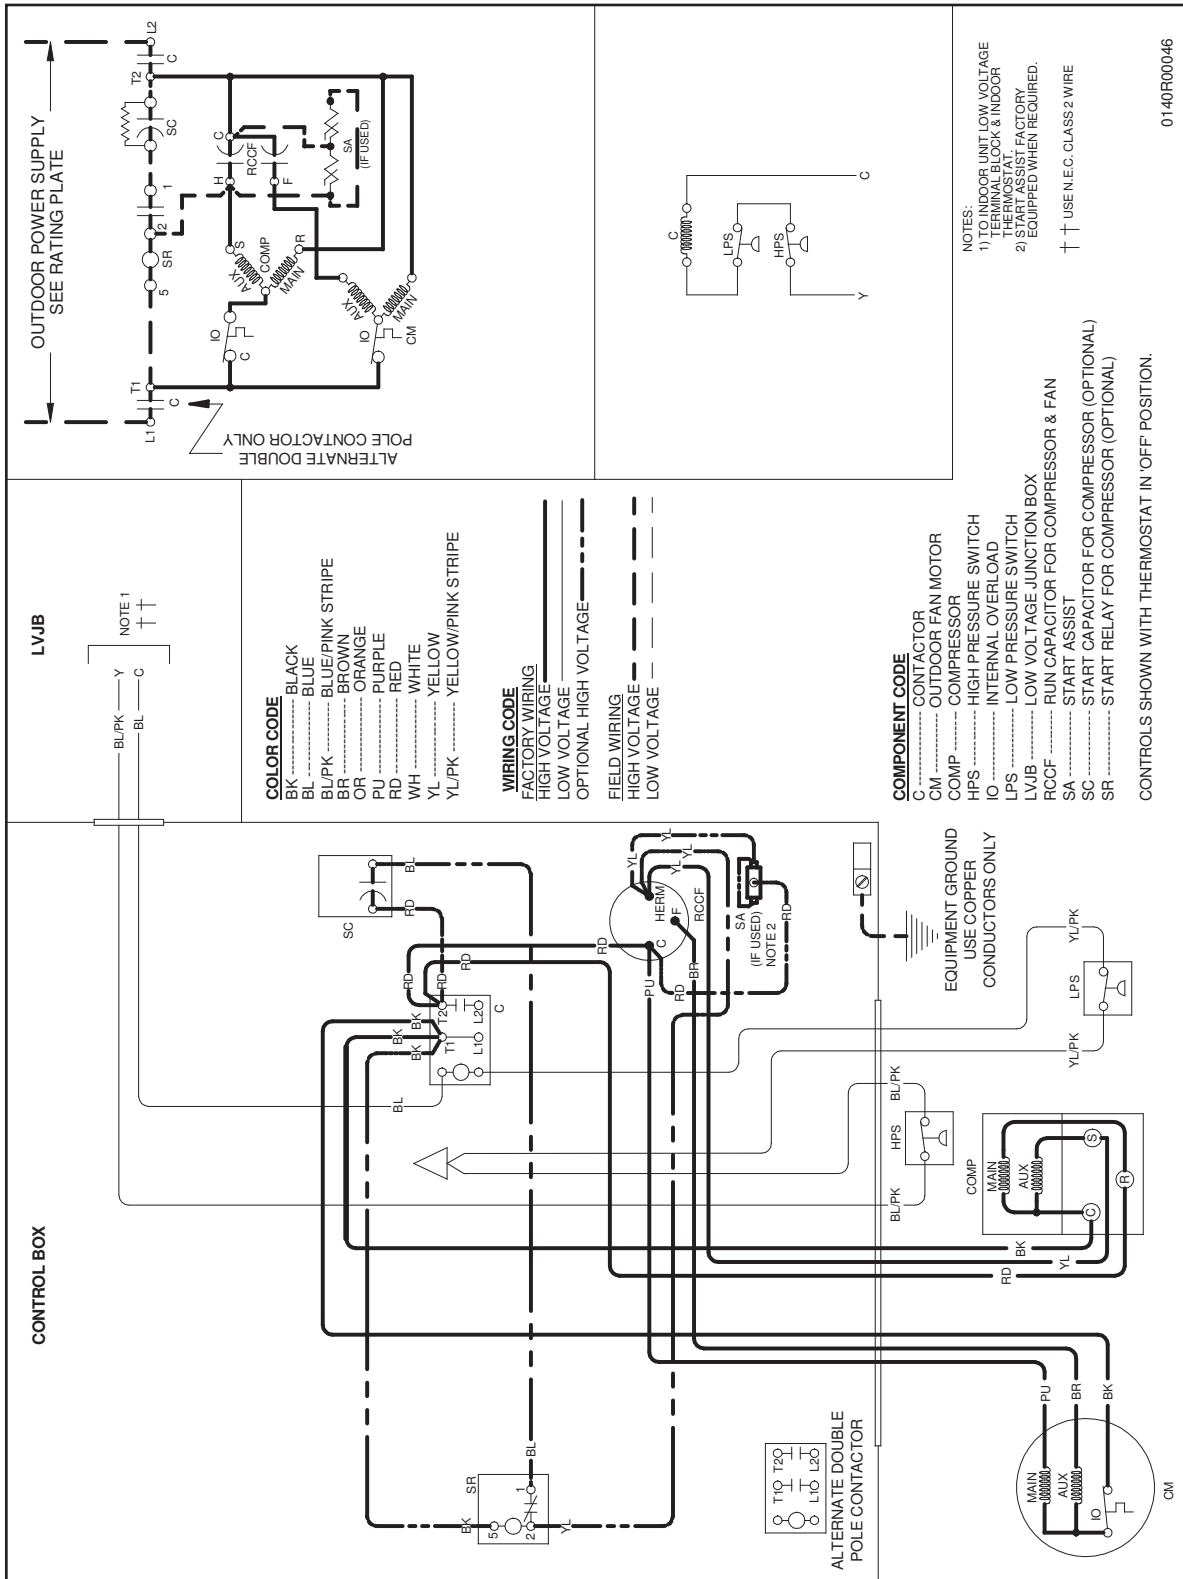

**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

ACCESSORIES

MODEL	DESCRIPTION	GSX14 018	GSX14 024	GSX14 030	GSX14 036	GSX14 042	GSX14 048	GSX14 060
ABK-20	Anchor Bracket Kit *	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X
LSK01A	Liquid Line Solenoid Kit	X	X	X	X	X	X	X
OT18-60A	Outdoor Thermostat / Lockout Stat	X	X	X	X	X	X	X
TX2N4 <sup>2</sup>	TXV Kit	X						
TX3N4 <sup>2</sup>	TXV Kit		X	X	X			
TX5N4 <sup>2</sup>	TXV Kit					X	X	X

\* Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device.

