

## TECHNICAL SPECIFICATIONS

# JS5BD-KA/B Series

## High Efficiency Air Conditioner 13+ SEER Residential System 1.5 - 5 Ton Capacity

The JS5BD Series of air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a line of quality, split system cooling equipment. The JS5BD is rated at 13 SEER when matched with our air handler and coils. Units are ideally sized for slab or rooftop mounting.




## WARRANTY

- This product offers a 10-year all-parts warranty.
- This product offers a 1 Year Quality Pledge to replace the unit if the compressor fails in the first year of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil.
- Consumer product registration required for 10 year All Parts Warranty and Quality Pledge within a limited period of time after the installation. See current warranty document or visit our consumer web site listed on the back of this document for warranty details.

## FEATURES and BENEFITS

- **Durable, Attractive Cabinet:** Designed using galvanized steel with a polyester urethane finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.
- **Composite Base Pan:** Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.
- **Permanently Lubricated Motor:** A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Full Service Valves:** These brass valves are easily accessible and simplify servicing of the refrigeration system.
- **Complete Metal Wrapper:** Protects the units coil from being damaged.
- **Removable Top Grille Assembly:** Allows ease of service from the top without disconnecting fan motor leads.
- **One Piece Top/Orifice:** Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access:** Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.


## MODEL IDENTIFICATION CODES

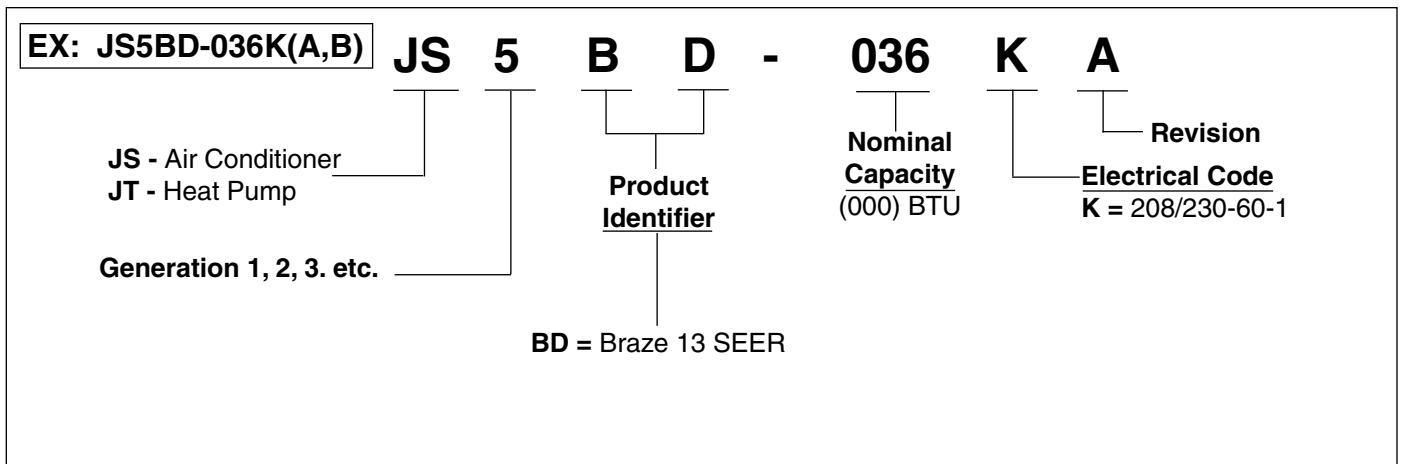

## DIMENSIONS

### AIR CONDITIONER OUTDOOR SECTION

JS5BD-	018KA	024KB	030KB	036KB	042KA	048KA	060KA
H	23	23	27	27	31	31	43
W	22-3/4	22-3/4	22-3/4	22-3/4	30-3/4	30-3/4	30-3/4
D	22-3/4	22-3/4	22-3/4	22-3/4	30-3/4	30-3/4	30-3/4

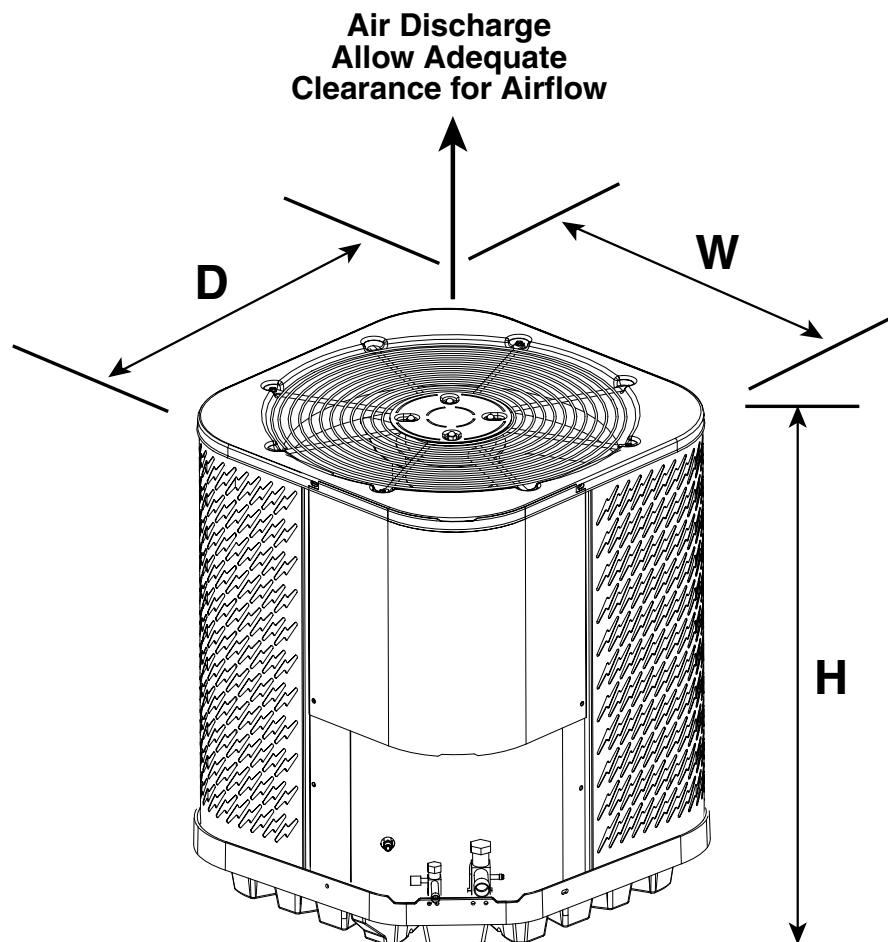

# PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

## 13+ SEER — High Efficiency — Single Phase

Model Number JS5BD-		018KA	024KB	030KB	036KB	042KA	048KA	060KA	
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	
	Total Amps	8.0	11.1	14.8	15.6	16.1	20.6	26.7	
	Delay Fuse Max. (2)	15	20	30	30	30	40	50	
	Min. Circuit Ampacity	10.0	13.7	18.3	19.2	19.8	25.4	33.0	
Component Data	Coil	Area	8.23	9.88	9.88	9.88	17.74	17.74	25.42
		Rows-FPI	1 - 22	1 - 18	1 - 18	1 - 18	1 - 22	1 - 22	1 - 22
		Tube Dia	3/8" O.D.	MC	MC	MC	3/8" O.D.	3/8" O.D.	3/8" O.D.
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	0.34	0.67	0.67	1.20	1.40	1.40	1.40
		HP	1/20	1/10	1/10	1/4	1/4	1/4	1/4
	Fan Blade	Dia-# Blades	18" - 3	18" - 3	18" - 3	18" - 3	24" - 3	24" - 3	24" - 3
		SCFM	1410	1985	3000	3000	4000	4000	4000
	Compressor Data	RLA	7.7	10.4	14.1	14.4	14.7	19.2	25.3
		LRA	40	54	68	77	77	97	141
Refrigerant suction line- Length/O.D. (Liq. Line All Lengths - 3/8" O.D.)	0-24 ft.	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	
	25-39 ft.	3/4"	3/4"	7/8" (3)	7/8" (3)	7/8"	7/8"	1-1/8" (4)	
	40-75 ft.	3/4"	3/4"	7/8" (3)	7/8" (3)	7/8"	1-1/8" (4)	1-1/8" (4)	
Refrigerant charge in Ounces (Outdoor unit, Indoor Unit 15' Line Set)		78	53	56	68	122	126	160	
Weight	Net	103	112	105	105	156	176	229	
	Approximate (lbs.) Ship	107	117	109	109	162	183	238	

(1) Operating Voltage Range: 187v min. — 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 7/8" to 3/4" reducer from line to unit.

(4) Requires 7/8" to 1-1/8" reducer from line to unit.

## ACCESSORIES - Condensing Unit

### Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

### Fan Delay Kit (TDR)

911758 - 80-second fan delay

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit Ampacity
200	150	100	50	
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

# SYSTEM COOLING CAPACITIES

## 13 SEER — High Efficiency — Single Phase

Outdoor Unit	Indoor TXV Coil + TDR	Cooling Capacity BTUH	SEER	EER	SCFM
018KA	C6B(A,H)-T24(C,U)-A	17,800	13.0	11.9	550
018KA	C6B(A,H)-T24(C,U)-B	17,800	13.0	11.9	550
024KA/B	C6B(A,H)-T24(C,U)-A	23,800	13.0	11.5	700
024KA/B	C6B(A,H)-T24(C,U)-B	23,800	13.0	11.5	700
030KA/B	C6B(A,H)-T30(C,U)-A	29,000	13.0	11.5	900
030KA/B	C6B(A,H)-T30(C,U)-B	29,000	13.0	11.5	900
036KA/B	C6B(A,H)-T36(C,U)-B	36,000	13.0	11.4	1100
036KA/B	C6B(A,H)-T36(C,U)-C	36,000	13.0	11.4	1100
042KA	C6B(A,H)-T42(C,U)-B	39,500	13.0	11.9	1300
042KA	C6B(A,H)-T42(C,U)-C	39,500	13.0	11.9	1300
048KA	C6B(A,H)-T48(C,U)-C	46,500	13.0	11.3	1550
048KA	C6B(A,H)-T48(C,U)-D	46,500	13.0	11.3	1550
060KA	C6B(A,H)-T60(C,U)-C	58,500	13.0	11.7	1600
060KA	C6B(A,H)-T60(C,U)-D	58,500	13.0	11.7	1600

Outdoor Unit	Indoor TXV Air Handler GB5BM-	Cooling Capacity BTUH	SEER	EER	SCFM
018KA	T24K-A	17,800	13.0	11.9	550
018KA	T24K-B	17,800	13.0	11.9	550
024KA/B	T24K-A	23,800	13.0	11.5	700
024KA/B	T24K-B	23,200	13.0	11.4	725
030KA/B	T30K-A	28,600	13.0	11.3	890
030KA/B	T30K-B	28,600	13.0	11.3	890
036KA/B	T36K-B	35,200	13.0	11.4	975
042KA	T42K-B	40,000	13.0	11.9	1,400
048KA	T48K-C	46,500	13.0	11.3	1,300
060KA	T60K-C	57,000	13.0	11.2	1,600

(1) Field Supplied Piston  
 LLS = Liquid Line Solenoid  
 TDR = Time Delay Relay included with G6\* furnace and air handler  
 VSB = Variable Speed Blower

Air handlers and coils used in tables are designed and manufactured by NORDYNE.

See Current AHRI Directory for certified combinations and ratings. [www.ahridirectory.org](http://www.ahridirectory.org)



### GENERAL TERMS OF LIMITED WARRANTY

NORDYNE will furnish a replacement for any part of this product which fails in normal use and service within the first ten years of installation, in accordance with the terms of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the NORDYNE warranty department for a copy.

# NORDYNE

COMPLETE COMFORT. GENUINE VALUE. 8000 Phoenix Parkway | O'Fallon MO 63368-3827

Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (07/2009)

084D-0709 (Replaces 084D-1208)