


These instructions are applicable to Rinnai's R50LSi, R75LSi, and R94LSi indoor water heaters where it is desired to do one of the following:

1. Replace the female vent top (supplied on VA LS series models) with a male vent top.
2. Reposition the condensate collector on a female vent top.

NOTE: The condensate collector is an integral part of the female vent top and is not on the male vent top. When the male vent top is used, a separate vent piece with a condensate collector is available.

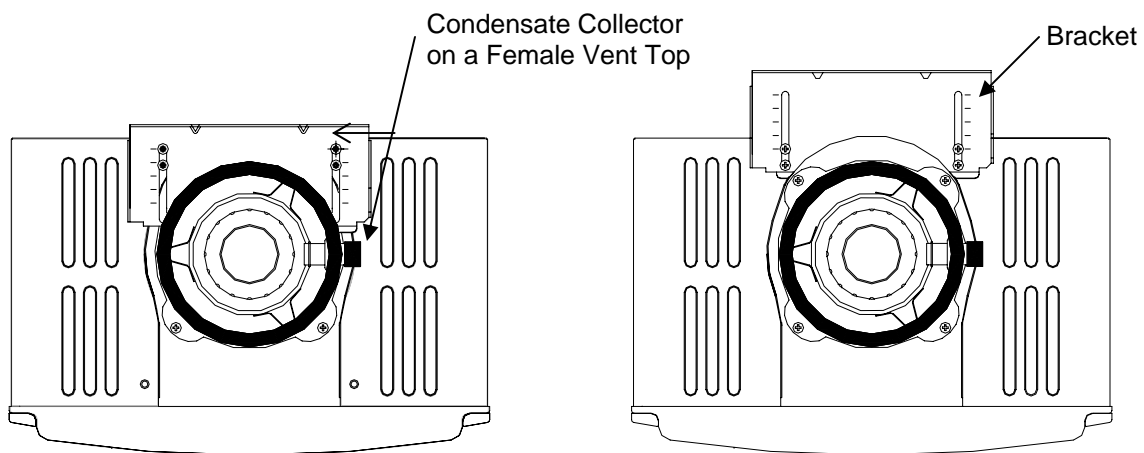

1. Loosen the 4 screws at the rear bracket at the top of the water heater. (If the water heater is installed it may be necessary to loosen both the top and bottom rear brackets.)
2. Slide the bracket away from the vent top.
3. Remove the 4 screws attaching the vent top to the water heater.
4. Pull out the vent top and replace with another.
-OR-
Reposition as desired.
5. Install the 4 screws at the vent top.
6. Slide the bracket back to the desired position and tighten the 4 screws at the bracket.