THE ASHTON SERIES


Fireplaces Inserts 2



THE ASHTON SERIES

Founded in fire and forged in history, Lexington Forge offers the tradition of fine craftsmanship and the convenience of contemporary technology in each of its uniquely beautiful stoves. Beyond its utilitarian uses for cooking and heating, fire has always been a gathering point at the hearth of every home. Create your

own gathering space and add the beauty and classic warmth of a Lexington Forge to yours. It will spark your own traditions and new reasons for coming together. After all, it's never too late to forge your own history.

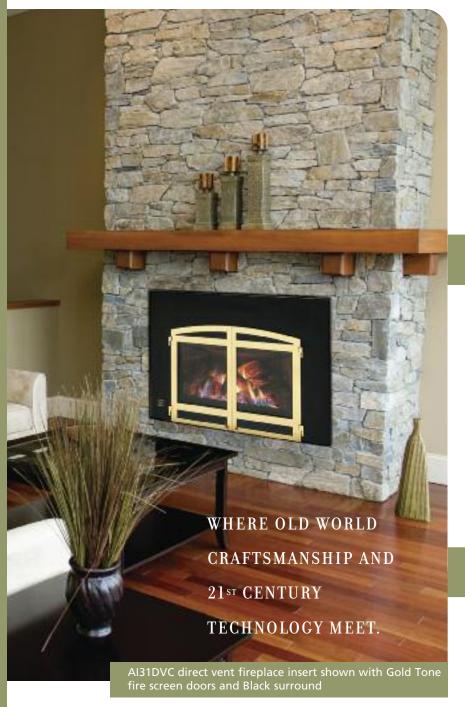



A131DVC direct vent inserts



A142DV direct vent inserts

OPTIONAL ACCESSORIES



Touch Light™ table top/wall mount TLM on/off and TLT thermostat remote control with receiver



Multi-functional Ambient Technologies® remote controls available for all units



Programmable wireless wall thermostat with receiver



Decorative arched front – Black

Decorative arched front – Brushed Pewter

Decorative arched front – Gold Tone



Fire screen doors
– Black

Fire screen doors
– Gold Tone

Fire screen doors

– Brushed Pewter

DIRECT VENT INSERTS

The Ashton Insert Series, like all Lexington Forge appliances, is built to stand the test of time. We understand that durability and performance are important criteria when selecting an insert for your home. While we deliver these features on every product we produce, we also know that a fireplace is often the focal point of a room or home. An insert adds value, comfort and beauty to any setting. Our designers and craftsman have meticulously scrutinized every detail to ensure that you receive the finest fireplace insert built today.

LEXFIRE BURN SYSTEM TM



Exclusive LexFire Burn
System – combines all of
the elements of a natural
wood fire to produce flames
so realistic, you'll forget it's
not real wood.

Realistic Logs – starting with hand carved samples that are perfectly proportioned to fit the insert size and viewing area and then color enhanced to match real wood.

Yellow Flames – bright yellow flames appear almost translucent in color.

Log glow – as log surfaces heat up they produce a bright reddish orange glow, similar to wood in the secondary stages of combustion.

Ember Bed – a large area of burning ember replicates the look of wood in the final stages of combustion.

Primary Combustion Zone – primary combustion of fuel load.

LexFire Burner – gas and oxygen are precisely metered and strategically distributed to provide optimum flame presentation.

ASHTON DIRECT VENT FEATURES

- Flush face design
- Ceramic glass with large viewing area
 - 371 Square Inches (AI31DVC)
 - 475 Square Inches (AI42DV)
- Fireplace interior offers a beautiful, richly colored ceramic brick pattern
- Featuring the exclusive LexFire Burn System™ with a realistic detailed dual burner log set, a beautiful glow with five distinct flame areas and a large ember bed
- Optional decorative fronts and fire screen doors available in several different finishes
- Optional surround trim available in Gold Tone
- Thermal efficiency Up to 80%

- Battery operated pilot ignitor
- External air shutter (natural gas models only)
- Operator friendly deluxe control panel with color illustrated decal including Off/Pilot/On knob, Hi/Lo knob, blower control, optional remote receiver and an easily accessible shut off valve
- Variable flame control

Al31DVC – 23,000 to 33,000 Btu/hr input (natural gas) and 23,000 to 31,000 Btu/hr input (propane gas)

Al42DV – 29,000 to 42,000 Btu/hr input (natural gas) and 28,000 to 40,000 Btu/hr input (propane gas)

Standard heat activated blower with variable speed control

AI31DVC

1.500

28" x 40"

32" x 44"

- Built in adjustable flue restrictor
- Top flue outlet
- · CSA design certified

Specifications

Model	AI31DVC	AI42DV	
Shipping Weight (Lbs)	120	200	Heating Capacity (Sq. ft.)
Width	29.75"	36"	Surround Size
Depth	19.75"	17.75"	
Height	23.75"	25.75"	
Fire Viewing Area (Sq. inch)	371	475	
Flue Size	3" x 3"	4" x 3"	N ap
Fan	135 CFM	135 CFM	ur
BTU/hr Input Rate (NG)	23,000 - 33,000	29,000 – 42,000	de te
BTU/hr Input Rate (LP)	23,000 - 31,000	28,000 - 40,000	Te
FE/P4 Ratings (Cdn. Fireplace Efficiency)	63.6% NG / 66% LP	64.2% NG / 67.7% LP	CS fii
Thermal Efficiency (%)	Up to 80	Up to 80	
			1

Note: Square foot heating capacities are approximations only. They will vary depending upon the level of insulation, climate, house design, ceiling height, ambient outside temperatures and how the appliance is operated. Tested to Canadian Standards Association's CSAP.4.1-02 testing method for measuring fireplace efficiency.

AI42DV

2.200

32" x 44"

34" x 48" 36" x 52"

















A Brand of Monessen Hearth Systems Co. 149 Cleveland Drive, Paris, Kentucky 40361

www.lexingtonforge.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2009 Monessen Hearth Systems Co.