



Slim-Temp
REACH-IN UNIT COOLER
AIR DEFROST



The "SLA" product line offers 7 air defrost models. Typical installations include; glass display and solid door upright coolers, walk-ins, salad cases, back bars and other tight spaced enclosures operating above +34°F.

All models are very low in height. Built with heavy gauge, textured Aluminum, they are compact and mount flush to the ceiling. Quick removal of the drain pan allows easy access to electrical and piping components. Capacity ratings are shown at +25°F evaporator temperature.

Our specially formulated epoxy coil coating is optionally available for all SLA models. This durable, baked on fin coating is highly resistant to many corrosive fumes and can significantly extend the life of the coil.



REACH-IN UNIT COOLER AIR DEFROST


Specifications

MODEL	CAPACITY		CFM	FLA		FAN DIA.	QTY MOTORS	CONNECTIONS(In)			WT. LBS
	10°TD	12°TD		115V	230V			SUC.	LIQ.	DRAIN	
SLA17-10	1000	1200	150	0.73	0.37	6	1	3/8 ODS	1/2 FN.	1/2 OD	15
SLA17-13	1300	1560	180	0.73	0.37	6	1	3/8 ODS	1/2 FN.	1/2 OD	18
SLA27-17	1700	2040	300	1.5	0.75	6	2	3/8 ODS	1/2 FN.	1/2 OD	22
SLA27-23	2300	2760	350	1.5	0.75	6	2	1/2 ODS	1/2 FN.	1/2 OD	29
SLA37-30	3000	3600	500	2.2	1.1	6	3	1/2 ODS	1/2 FN.	1/2 OD	37
SLA47-40	4000	4800	600	2.9	1.5	6	4	1/2 ODS	1/2 FN.	1/2 OD	45
SLA57-50	5000	6000	750	3.7	1.9	6	5	1/2 ODS	1/2 FN.	1/2 OD	61

Dimensions

MODEL	W	D	H	B	C	E	F	G	J	K	L	M	N
SLA17-10	16-1/2	13-1/2	4-3/4	6-3/4	2-1/4	13-3/4	14-3/4	7/8	7/8	1-1/16	2-3/4	3	4-3/4
SLA17-13	20-1/2	13-1/2	4-3/4	6-3/4	2-1/4	13-3/4	18-3/4	7/8	7/8	1-1/16	3-3/4	3	4-3/4
SLA27-17	24	14-1/2	4-3/4	6-3/4	2-1/4	14-3/4	22-1/4	7/8	7/8	1-1/16	11-3/4	3	4-3/4
SLA27-23	31-1/2	14-1/2	4-3/4	6-3/4	2-1/4	14-3/4	29-3/4	7/8	7/8	1-1/16	11-3/4	3	4-3/4
SLA37-30	40	14-1/2	4-3/4	6-3/4	2-1/4	14-3/4	38-1/4	7/8	7/8	1-1/16	6-3/4	3	4-3/4
SLA47-40	53-1/2	14-1/2	4-3/4	6-3/4	2-1/4	14-3/4	51-3/4	7/8	7/8	1-1/16	8-1/2	3	4-3/4
SLA57-50	53-1/2	14-1/2	6-3/4	6-3/4	2-1/4	14-3/4	51-3/4	7/8	7/8	1-1/16	5-1/4	4	5-3/4

* All dimensions are in inches.

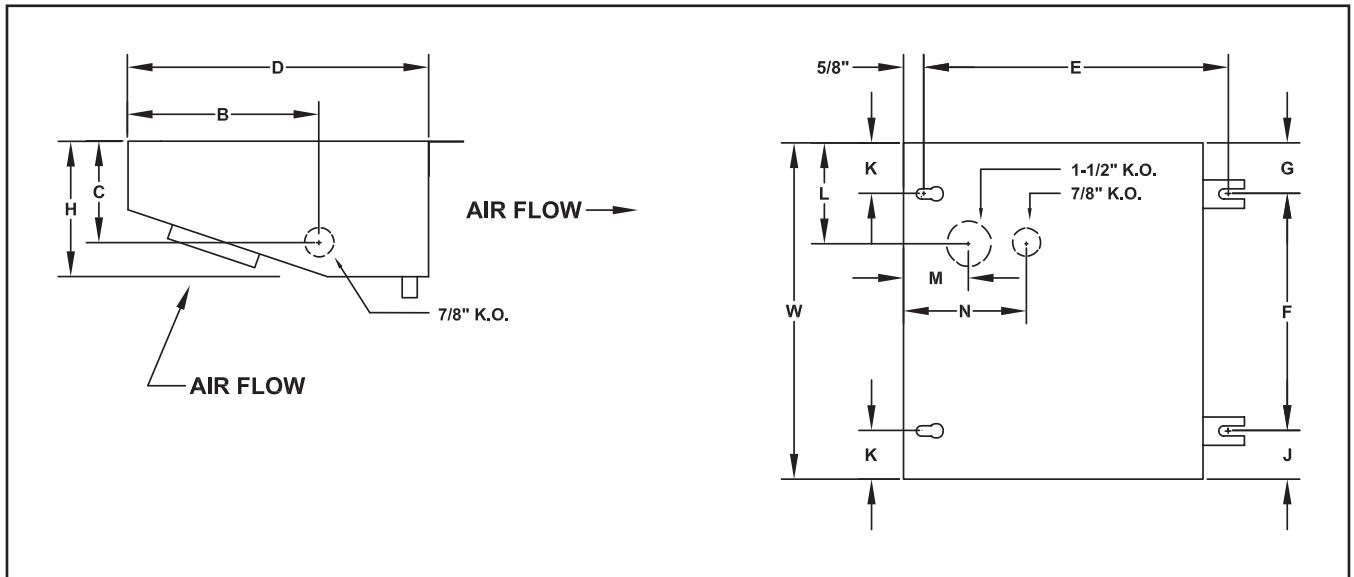

Due to continuing product development, specifications are subject to change without notice.