

PRODUCT SPECIFICATIONS



Air Conditioning & Heating

CLT SERIES 13 SEER

High-Efficiency Split System Air Conditioner

2 to 5 Ton



The CLT split system air conditioner is designed for ground-level or rooftop mount application.



Standard Features

- High-efficiency Copeland® scroll compressor
- Louvered guard protects coil from damage and adds strength to the unit
- Bottom pan rails elevate unit above slab
- Quiet operating top discharge
- Totally enclosed and permanently lubricated 8-pole, 850-RPM PSC condenser motor
- Copper tube/aluminum fin coil
- Brass suction and liquid service valve with sweat connections
- Fully charged for 15' of tubing length
- Factory-installed liquid line filter drier
- Compressor sound blanket
- Contactor with lug connections
- Ground lug connection

Air Handler and Coil Compatibilities

- ARPT, ARUF and AEPT is a versatile upflow, horizontal or downflow air handler; these units may be located in closet, utility room, attic or basement
- AWB vertical wall-mounted electric heat air handler
- AC ceiling-mounted electric heat air handler
- MBR/MBE modular blower
- CA, CH and H indoor coils

Cabinet Construction

- Polyester powder paint provides premium durability and improved UV protection
- Heavy-gauge, zinc-clad, G90 galvanized steel
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds

Accessories

- Standard room thermostat with 1-stage cool/1-stage heat (CHT18-60 or CHSATG)
- Digital room thermostat with 1-stage cool/1-stage heat (CH70TG)
- Outdoor Thermostat (OT18-60)
- Low Ambient Kit (LA-01)



PRODUCT SPECIFICATIONS

Specifications

Model	Service Valve		Type	Approximate Shipping Weight (pounds)
	Liquid	Suction		
CLT24-1A/-1B	3/8"	3/4"	Sweat	173
CLT30-1A/-1B	3/8"	3/4"	Sweat	208
CLT36-1A/-1B	3/8"	3/4"	Sweat	209
CLT42-1A/-1B	3/8"	7/8"	Sweat	258
CLT48-1A/-1B	3/8"	7/8"	Sweat	270
CLT60-1/-1B	3/8"	7/8"	Sweat	271

NOTE: The *-1B models are painted in Architectural Gray. All other models are painted in Bahama Beige.


Electrical Data

Model	Volts	PH	Minimum Circuit Ampacity ¹	Maximum Overcurrent Protection ²	Maximum Volts	Minimum Volts	Compressor		Condenser Fan	
							RLA	LRA	FLA	HP
CLT24-1A/-1B	208/230	1	12.9	20	253	197	9.6	45	0.9	1/6
CLT30-1A/-1B	208/230	1	16.4	20	253	197	12.2	63	1.1	1/6
CLT36-1A/-1B	208/230	1	20.1	30	253	197	14.8	83	1.6	1/4
CLT42-1A/-1B	208/230	1	22.4	30	253	197	16.6	95	1.6	1/4
CLT48-1A/-1B	208/230	1	24.1	40	253	197	18.0	104	1.6	1/4
CLT60-1/-1B	208/230	1	29.2	50	253	197	22.1	137	1.6	1/4

1) Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

2) May use fuses or HACR type Circuit Breakers of the same size as noted.

Dimensions

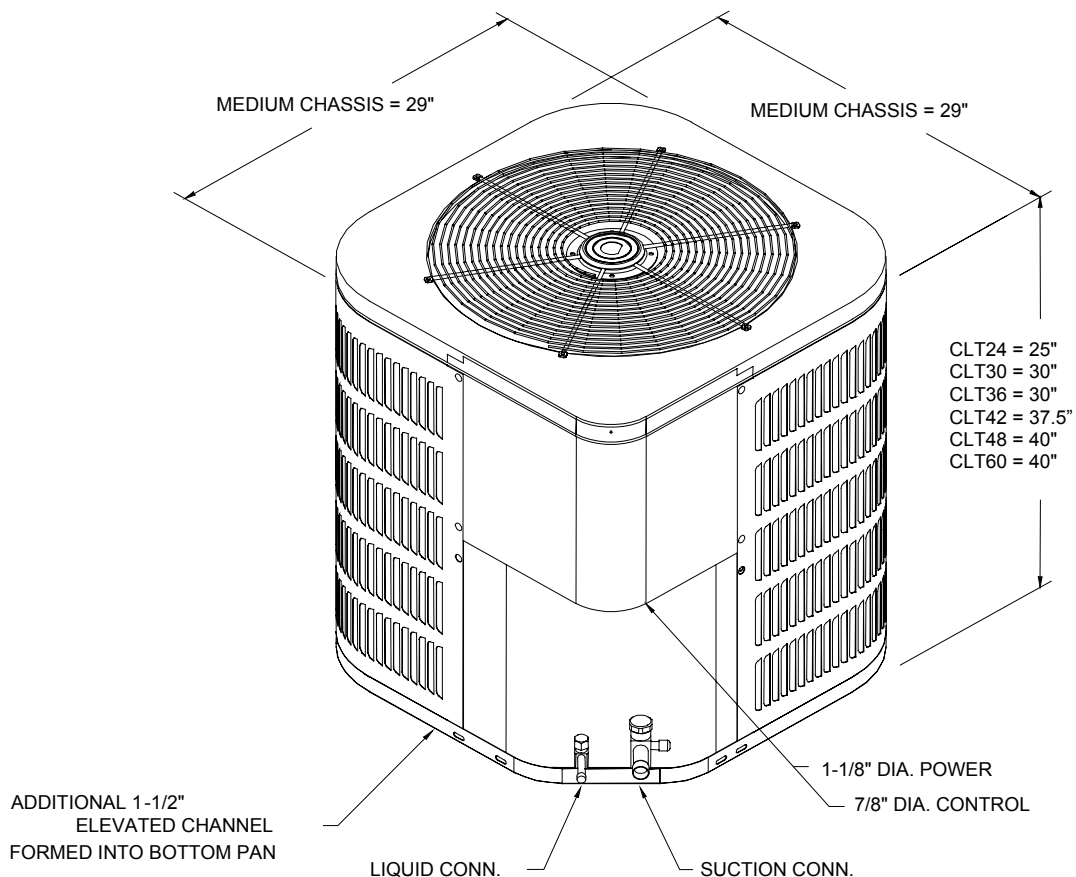

PRODUCT SPECIFICATIONS

Performance Ratings

Condenser	Evaporator Model	Total BTUH	Sensible BTUH	SEER	EER	ARI Ref. #	Decibel
CLT24	AC24-XX	21,000	15,500	12.0	11.0	503821	74
	AEPT030-00A-1	22,400	16,800	14.0	13.0	503822	74
	ARPT024-00A-1	21,000	15,500	12.0	11.0	503823	74
	ARPT032-00A-1	22,000	16,500	13.0	11.8	503824	74
	ARUF024-00A-1	21,000	15,500	12.0	11.0	503825	74
	ARUF032-00A-1	22,000	16,500	13.0	11.8	503826	74
	AWB24-XX	22,000	16,500	12.0	11.0	503827	74
	AWB36-XX	22,000	16,500	13.0	11.8	503828	74
	CA*F030*2*+EEP	21,000	15,500	12.0	11.0	503829	74
	CA*F030*2*+G*V90453B**	22,000	16,500	14.0	13.0	503830	74
	CA*F030*2*+GMV80703BXA	22,000	16,500	14.0	13.0	521038	74
	CA*F036*2*+EEP	22,000	16,500	13.0	11.8	503832	74
	CA*F042*2*+G*V90704C**	22,400	16,800	14.0	13.0	503833	74
	CA*F042*2*+GMV80703BXA	22,400	16,800	14.0	13.0	521047	74
	CA*F048*2*+EEP	22,400	16,800	13.0	11.8	503834	74
	CA*X030*2*+EEP	21,000	15,500	12.0	11.0	503835	74
	CA*X030*2*+G*V90453B**	22,000	16,500	14.0	13.0	503836	74
	CA*X030*2*+GMV80703BXA	22,000	16,500	14.0	13.0	521046	74
	CA*X036*2*+EEP	22,000	16,500	13.0	11.8	503837	74
	CA*X042*2*+G*V90704C**	22,400	16,800	14.0	13.0	503838	74
	CA*X042*2*+GMV80703BXA	22,400	16,800	14.0	13.0	521045	74
	CHPF024A2*+EEP	21,000	15,500	12.0	11.0	503839	74
	CHPF030A2*+EEP	22,000	16,500	13.0	11.8	503840	74
	CHPF030A2*+G*V90453B**	22,000	16,500	14.0	13.0	503841	74
	CHPF030A2*+GMV80703BXA	22,000	16,500	14.0	13.0	521039	74
	CHPF036B2*+EEP	22,400	16,800	13.0	11.8	503843	74
	CHPF042B2*+G*V90704C**	22,400	16,800	14.0	13.0	503844	74
	CHPF042B2*+GMV80703BXA	22,400	16,800	14.0	13.0	521039	74
	CHPX024A2*+EEP	21,000	15,500	12.0	11.0	503845	74
	CHPX030A2*+EEP	22,000	16,500	13.0	11.8	503846	74
	CHPX030A2*+G*V90453B**	22,000	16,500	14.0	13.0	503847	74
	CHPX030A2*+GMV80703BXA	22,000	16,500	14.0	13.0	521041	74
	CHPX042B2*+EEP	22,400	16,800	13.0	11.8	503848	74
	CHPX042B2*+G*V90704C**	22,400	16,800	14.0	13.0	503849	74
	CHPX042B2*+GMV80703BXA	22,400	16,800	14.0	13.0	521043	74
	H24F+EEP	21,000	15,500	12.0	11.0	503850	74
	H36F+EEP	22,000	16,500	13.0	11.8	503851	74
	H49F+EEP	22,400	16,800	13.0	11.8	503853	74

NOTES:

- 1) Seasonal Energy Efficiency Ratio
- 2) Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F
- 3) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 4) Note: XX of a model designates Electric Heat Quantity.
- 5) EEP - Order From Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S.

The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

Performance Ratings (cont.)

Condenser	Evaporator Model	Total BTUH	Sensible BTUH	SEER	EER	ARI Ref. #	Decibel
CLT30	AC30-XX	26,000	19,250	12.6	11.5	503863	74
	AEPT036-00A-1	28,000	21,000	14.0	13.0	503864	74
	ARPT032-00A-1	26,600	20,100	13.0	11.8	503865	74
	ARPT036-00A-1	26,000	19,250	12.5	11.5	503866	74
	ARUF030-00A-1	25,600	18,950	12.0	11.0	503867	74
	ARUF032-00A-1	26,600	20,100	13.0	11.8	503868	74
	ARUF036-00A-1	26,000	19,250	12.5	11.5	503869	74
	AWB30-XX	25,600	18,950	12.0	11.0	503870	74
	AWB36-XX	26,000	19,250	12.5	11.5	503871	74
	CA*F030*2*+EEP	26,600	20,100	13.0	11.8	503872	74
	CA*F030*2*+G*V90453B**	27,000	20,250	14.0	13.0	503873	74
	CA*F030*2*+GMV80703BXA	27,000	20,250	14.0	13.0	521036	74
	CA*F042*2*+EEP	27,000	20,250	13.0	11.8	503875	74
	CA*F042*2*+G*V90704C**	27,000	20,250	14.0	13.0	503876	74
	CA*F042*2*+GMV80703BXA	27,000	20,250	14.0	13.0	521037	74
	CA*X030*2*+EEP	26,600	20,100	13.0	11.8	503877	74
	CA*X030*2*+G*V90453B**	27,000	20,250	14.0	13.0	503878	74
	CA*X030*2*+GMV80703BXA	27,000	20,250	14.0	13.0	521044	74
	CA*X042*2*+EEP	27,000	20,250	13.0	11.8	503879	74
	CA*X042*2*+G*V90704C**	27,000	20,250	14.0	13.0	503880	74
	CA*X042*2*+GMV80703BXA	27,000	20,250	14.0	13.0	521074	74
	CHPF030A2*+EEP	26,600	20,100	13.0	11.8	503881	74
	CHPF030A2*+G*V90453B**	27,000	20,250	14.0	13.0	503882	74
	CHPF030A2*+GMV80703BXA	27,000	20,250	14.0	13.0	521170	74
	CHPF036B2*+EEP	27,000	20,250	13.0	11.8	503884	74
	CHPF042B2*+G*V90704C**	27,000	20,250	14.0	13.0	503885	74
	CHPF042B2*+GMV80703BXA	27,000	20,250	14.0	13.0	521169	74
	CHPX030A2*+EEP	26,600	20,100	13.0	11.8	503886	74
	CHPX030A2*+G*V90453B**	27,000	20,250	14.0	13.0	503887	74
	CHPX030A2*+GMV80703BXA	27,000	20,250	14.0	13.0	521162	74
	CHPX042B2*+EEP	27,000	20,250	13.0	11.8	503888	74
	CHPX042B2*+G*V90704C**	27,000	20,250	14.0	13.0	503889	74
CHPX042B2*+GMV80703BXA	27,000	20,250	14.0	13.0	521174	74	
H36F+EEP	26,600	20,100	13.0	11.8	503890	74	
H49F+EEP	27,000	20,250	13.0	11.8	503891	74	

NOTES:

- 1) Seasonal Energy Efficiency Ratio
- 2) Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F
- 3) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 4) Note: XX of a model designates Electric Heat Quantity.
- 5) EEP - Order From Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S.

The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

Performance Ratings (cont.)

Condenser	Evaporator Model	Total BTUH	Sensible BTUH	SEER	EER	ARI Ref. #	Decibel
CLT36	AEPT036-00A-1	36,000	26,200	14.0	13.0	503901	74
	ARPT036-00A-1	34,000	23,800	12.0	11.0	503902	74
	ARPT049-00A-1	36,000	26,200	13.0	11.8	503903	74
	ARUF036-00A-1	34,000	23,800	12.0	11.0	503904	74
	ARUF042-00A-1	35,000	24,800	12.5	11.4	503905	74
	ARUF048-00A-1	36,000	26,200	13.0	11.8	503906	74
	AWB36-XX	34,000	23,800	12.0	11.0	503907	74
	CA*F036*2*+EEP	34,000	23,800	12.0	11.0	503908	74
	CA*F042*2*+EEP	35,000	24,800	12.5	11.4	503909	74
	CA*F048*2*+EEP	36,000	26,200	13.0	11.8	503910	74
	CA*F048*2*+G*V90905D**	36,000	26,200	14.0	13.0	503911	74
	CA*F048*2*+G*V91155D**	36,000	26,200	14.0	13.0	503912	74
	CA*F048*2*+GMV80905CXA	36,000	26,000	14.0	13.0	521164	74
	CA*F048*2*+GMV81155CXA	36,000	26,000	14.0	13.0	521172	74
	CA*X036*2*+EEP	34,000	23,800	12.0	11.0	503915	74
	CA*X042*2*+EEP	35,000	24,800	12.5	11.4	503916	74
	CA*X048*2*+G*V90905D**	36,000	26,200	14.0	13.0	503917	74
	CA*X048*2*+G*V91155D**	36,000	26,200	14.0	13.0	503918	74
	CA*X048*2*+GMV80905CXA	36,000	26,000	14.0	13.0	TBD	74
	CA*X048*2*+GMV81155CXA	36,000	26,000	14.0	13.0	TBD	74
	CHPF036B2*+EEP	33,800	23,660	12.5	11.4	503919	74
	CHPF048D2*+EEP	36,000	26,200	13.0	11.8	503920	74
	CHPF048D2*+G*V90905D**	36,000	26,200	14.0	13.0	503921	74
	CHPF048D2*+G*V91155D**	36,000	26,200	14.0	13.0	503922	74
	CHPF048D2*+GMV80905CXA	36,000	26,000	14.0	13.0	521163	74
	CHPF048D2*+GMV81155CXA	36,000	26,000	14.0	13.0	521166	74
	CHPX042B2*+EEP	33,800	23,660	12.5	11.4	503925	74
	CHPX048D2*+EEP	36,000	26,200	13.0	11.8	503926	74
	CHPX048D2*+G*V90905D**	36,000	26,200	14.0	13.0	503927	74
	CHPX048D2*+G*V91155D**	36,000	26,200	14.0	13.0	503928	74
	CHPX048D2*+GMV80905CXA	36,000	26,000	14.0	13.0	521167	74
	CHPX048D2*+GMV81155CXA	36,000	26,000	14.0	13.0	521168	74
	H49F+EEP	35,000	24,800	12.5	11.4	503929	74
H60F+EEP	36,000	26,200	13.0	11.8	503930	74	
H61F+EEP	36,000	26,200	13.0	11.8	503933	74	

NOTES:

- 1) Seasonal Energy Efficiency Ratio
- 2) Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F
- 3) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 4) Note: XX of a model designates Electric Heat Quantity.
- 5) EEP - Order From Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S.

The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

Performance Ratings (cont.)

Condenser	Evaporator Model	Total BTUH	Sensible BTUH	SEER	EER	ARI Ref. #	Decibel
CLT42	AEPT060-00A-1	41,000	30,000	14.0	13.0	503944	74
	ARPT042-00A-1	39,000	28,000	12.0	11.0	503945	74
	ARPT049-00A-1	41,000	30,000	13.0	11.8	503946	74
	ARUF042-00A-1	39,000	28,000	12.0	11.0	503947	74
	ARUF048-00A-1	40,000	29,000	12.5	11.5	503948	74
	ARUF049-00A-1	41,000	30,000	13.0	11.8	503949	74
	CA*F042*2*+EEP	39,000	28,000	12.0	11.0	503950	74
	CA*F060*2*+EEP	40,000	29,000	12.5	11.5	503951	74
	CA*F061*2*+EEP	41,000	30,000	13.0	11.8	503952	74
	CA*F061*2*+G*V90905D**	41,000	30,000	14.0	13.0	503953	74
	CA*F061*2*+G*V91155D**	41,000	30,000	14.0	13.0	503954	74
	CA*F061*2*+GMV80905CXA	41,000	30,000	14.0	13.0	521173	74
	CA*F061*2*+GMV81155CXA	41,000	30,000	14.0	13.0	521183	74
	CA*X060*2*+EEP	40,000	29,000	12.5	11.5	503957	74
	CA*X060*2*+G*V91155D**	41,000	30,000	14.0	13.0	503958	74
	CA*X061*2*+EEP	41,000	30,000	13.0	11.8	503959	74
	CA*X061*2*+G*V90905D**	41,000	30,000	14.0	13.0	503960	74
	CA*X061*2*+GMV80905CXA	41,000	30,000	14.0	13.0	521196	74
	CA*X061*2*+GMV81155CXA	41,000	30,000	14.0	13.0	521190	74
	CHPF036B2*+EEP	39,000	28,000	12.0	11.0	503961	74
	CHPF048D2*+EEP	40,000	29,000	12.5	11.5	503962	74
	CHPF060D2*+EEP	41,000	30,000	13.0	11.8	503963	74
	CHPF060D2*+G*V90905D**	41,000	30,000	14.0	13.0	503964	74
	CHPF060D2*+G*V91155D**	41,000	30,000	14.0	13.0	503965	74
	CHPF060D2*+GMV80905CXA	41,000	30,000	14.0	13.0	521192	74
	CHPF060D2*+GMV81155CXA	41,000	30,000	14.0	13.0	521194	74
	CHPX042B2*+EEP	39,000	28,000	12.0	11.0	503968	74
	CHPX048D2*+EEP	40,000	29,000	12.5	11.5	503969	74
	CHPX060D2*+EEP	41,000	30,000	13.0	11.8	503970	74
	CHPX060D2*+G*V90905D**	41,000	30,000	14.0	13.0	503971	74
	CHPX060D2*+G*V91155D**	41,000	30,000	14.0	13.0	503972	74
	CHPX060D2*+GMV80905CXA	41,000	30,000	14.0	13.0	521193	74
	CHPX060D2*+GMV81155CXA	41,000	30,000	14.0	13.0	521188	74
	H49F+EEP	39,000	28,000	12.0	11.0	503973	74
H60F+EEP	40,000	29,000	12.5	11.5	503974	74	
H61F+EEP	41,000	30,000	13.0	11.8	503975	74	

NOTES:

- 1) Seasonal Energy Efficiency Ratio
- 2) Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F
- 3) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 4) Note: XX of a model designates Electric Heat Quantity.
- 5) EEP - Order From Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S.

The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

Performance Ratings (cont.)

Condenser	Evaporator Model	Total BTUH	Sensible BTUH	SEER	EER	ARI Ref. #	Decibel
CLT48	AEPT060-00A-1	44,500	33,400	13.5	12.5	503992	74
	ARPT049-00A-1	44,000	33,000	13.0	11.8	503993	74
	ARUF048-00A-1	43,500	32,000	12.5	11.5	503994	74
	ARUF049-00A-1	44,000	33,000	13.0	11.8	503995	74
	CA*F048*2*+EEP	43,000	31,000	12.5	11.5	503996	74
	CA*F060*2*+EEP	44,000	33,000	12.5	11.5	503997	74
	CA*F061*2*+EEP	45,000	33,700	13.0	11.8	503998	74
	CA*F061*2*+G*V90905D**	45,000	33,700	13.5	12.5	503999	74
	CA*F061*2*+G*V91155D**	45,000	33,700	13.5	12.5	504000	74
	CA*F061*2*+GMV80905CXA	45,000	33,700	13.5	12.5	521197	74
	CA*F061*2*+GMV81155CXA	45,000	33,700	13.5	12.5	521191	74
	CA*X060*2*+EEP	44,000	33,000	12.5	11.5	504003	74
	CA*X060*2*+G*V91155D**	45,000	33,700	13.5	12.5	504004	74
	CA*X061*2*+EEP	45,000	33,700	13.0	11.8	504005	74
	CA*X061*2*+G*V90905D**	45,000	33,700	13.5	12.5	504006	74
	CA*X061*2*+GMV80905CXA	45,000	33,700	13.5	12.5	521185	74
	CA*X061*2*+GMV81155CXA	45,000	33,700	13.5	12.5	521182	74
	CHPF048D2*+EEP	44,000	33,000	12.5	11.5	504007	74
	CHPF060D2*+EEP	45,000	33,700	13.0	11.8	504008	74
	CHPF060D2*+G*V90905D**	45,000	33,700	13.5	12.5	504009	74
	CHPF060D2*+G*V91155D**	45,000	33,700	13.5	12.5	504010	74
	CHPF060D2*+GMV80905CXA	45,000	33,700	13.5	12.5	521186	74
	CHPF060D2*+GMV81155CXA	45,000	33,700	13.5	12.5	521184	74
	CHPX048D2*+EEP	44,000	33,000	12.5	11.5	504013	74
	CHPX060D2*+EEP	45,000	33,700	13.0	11.8	504014	74
	CHPX060D2*+G*V90905D**	45,000	33,700	13.5	12.5	504015	74
	CHPX060D2*+G*V91155D**	45,000	33,700	13.5	12.5	504016	74
	CHPX060D2*+GMV80905CXA	45,000	33,700	13.5	12.5	521181	74
	CHPX060D2*+GMV81155CXA	45,000	33,700	13.5	12.5	521176	74
	H49F+EEP	43,000	31,000	12.5	11.5	504017	74
	H60F+EEP	44,000	33,000	12.5	11.5	504018	74
	H61F+EEP	45,000	33,700	13.0	11.8	504019	74

NOTES:

- 1) Seasonal Energy Efficiency Ratio
- 2) Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F
- 3) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 4) Note: XX of a model designates Electric Heat Quantity.
- 5) EEP - Order From Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S.

The Goodman Gas Furnace contains the EEP cooling time delay.

PRODUCT SPECIFICATIONS

Performance Ratings (cont.)

Condenser	Evaporator Model	Total BTUH	Sensible BTUH	SEER	EER	ARI Ref. #	Decibel
CLT60	AEPT060-00A-1	53,000	40,200	13.0	11.8	504033	74
	ARPT061-00A-1	53,000	40,200	12.5	11.5	504034	74
	ARUF060-00A-1	52,000	39,700	12.0	11.0	504035	74
	ARUF061-00A-1	53,000	40,200	12.5	11.5	504036	74
	CA*F061*2*+EEP	52,000	39,700	13.0	11.8	504037	74
	CA*F061*2*+G*V91155D**	53,000	40,200	13.3	12.3	504038	74
	CA*F061*2*+GMV80905CXA	53,000	40,200	13.3	12.2	521179	74
	CA*F061*2*+GMV81155CXA	53,000	40,200	13.3	12.2	521178	74
	CA*X061*2*+EEP	52,000	39,700	13.0	11.8	504040	74
	CA*X061*2*+G*V91155D**	53,000	40,200	13.3	12.3	504041	74
	CA*X061*2*+GMV80905CXA	53,000	40,200	13.3	12.2	521195	74
	CA*X061*2*+GMV81155CXA	53,000	40,200	13.3	12.2	521177	74
	CHPF060D2*+EEP	52,000	39,700	13.0	11.8	504042	74
	CHPF060D2*+G*V91155D**	53,000	40,200	13.3	12.3	504043	74
	CHPF060D2*+GMV80905CXA	53,000	40,200	13.3	12.2	521175	74
	CHPF060D2*+GMV81155CXA	53,000	40,200	13.3	12.2	521189	74
	CHPX060D2*+EEP	52,000	39,700	13.0	11.8	504045	74
	CHPX060D2*+G*V91155D**	53,000	40,200	13.3	12.3	504046	74
	CHPX060D2*+GMV80905CXA	53,000	40,200	13.3	12.2	521180	74
	CHPX060D2*+GMV81155CXA	53,000	40,200	13.3	12.2	521187	74
H61F+EEP	52,000	39,700	13.0	11.8	504047	74	

NOTES:

- 1) Seasonal Energy Efficiency Ratio
- 2) Energy Efficiency Ratio @ 80 °F/67 °F [26.6 °C/19.4 °C] Inside - 95 °F [35 °C]
- 3) When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- 4) Note: XX of a model designates Electric Heat Quantity.
- 5) EEP - Order From Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is **not interchangeable** with B13707-35S.

The Goodman Gas Furnace contains the EEP cooling time delay.



Goodman Manufacturing Company, L.P., reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.
 Copyright © 2004 Goodman Manufacturing Company, L.P. • Houston, Texas • Printed in the USA. • Goodman® brand products are made proudly in the USA.