



Air Conditioning & Heating

# DSZC18

## SPLIT SYSTEM HEAT PUMP UP TO 18 SEER

**COOLING CAPACITY: 35,000 - 56,500 BTU/H**

**HEATING CAPACITY: 33,600 - 56,400 BTU/H**



### Contents

Nomenclature .....	2
Product Specifications .....	3
Expanded Cooling Data .....	4
Expanded Heating Data .....	16
AHRI Ratings.....	18
Dimensions .....	25
Wiring Diagram.....	26
Accessories .....	27

### Standard Features

- R-410A chlorine-free refrigerant
- Two-Stage Copeland® UltraTech™ scroll compressor
- High-density foam compressor sound blanket
- ComfortNet™ Communications System compatible
- Expanded ComfortAlert diagnostics built in
- Set-up capable with two low-voltage wires to outdoor unit
- Diagnostic indicator lights and storage of six fault codes
- Color-coded terminal strip for non-communicating set-up
- SmartShift® technology with short-cycle protection to ensure quiet, reliable defrost
- Factory-installed bi-flow liquid line filter drier
- Factory-installed suction line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- Factory-installed coil and ambient temperature sensors
- High- and low-pressure switches
- Quiet ECM-style condenser fan motor
- AHRI Certified; ETL Listed

### Cabinet Features

- Unique sound control top design
- Wire fan discharge grille
- Steel louver coil guard
- Baked-on powder paint finish
- Top and side maintenance access
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



\* Complete warranty details available from your local dealer or at [www.goodmanmfg.com](http://www.goodmanmfg.com). To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home), 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

NOMENCLATURE

	D	S	Z	C	18	036	1	A	A		
	1	2	3	4	5,6	7,8,9	10	11	12		
<b>Brand</b>	D Goodman® Brand High Feature Set										<b>Engineering *</b> Minor Revision
<b>Product Category</b>	S Split System										<b>Engineering *</b> Major Revision
<b>Unit Type</b>	X Condenser R-410A Z Heat Pump R-410A										<b>Electrical</b>
<b>Communication Feature</b>	C ComfortNet 4-wire communications ready										1 208/230 V, 1 Phase, 60 Hz 2 220/240 V, 1 Phase, 50 Hz 3 208/230 V, 3 Phase, 60 Hz 4 460 V, 3 Phase, 60 Hz
<b>Efficiency</b>	13 13 SEER    16 16 SEER 14 14 SEER    18 18 SEER										<b>Nominal Capacity</b> 024 2 Tons    048 4 Tons 036 3 Tons    060 5 Tons

\* Neither used for order entry or inventory management.



**SPECIFICATIONS**

	<b>DSZC18 0361A</b>	<b>DSZC18 0481A</b>	<b>DSZC18 0601B</b>
<b>COOLING CAPACITY</b>			
Nominal Cooling (BTU/h)	35,000	47,000	57,000
Nominal Heating (BTU/h)	35,000	47,000	57,000
Decibels	72	73	75
<b>COMPRESSOR</b>			
RLA	15.3	21.2	28.8
LRA	83	104	152.9
<b>CONDENSER FAN MOTOR</b>			
Horsepower (RPM)	½	½	½
FLA	2.8	2.8	2.8
<b>REFRIGERATION SYSTEM</b>			
Refrigerant Line Size <sup>1</sup>			
Liquid Line Size ("O.D.)	¾"	¾"	¾"
Suction Line Size ("O.D.)	¾"	1½"	1½"
Refrigerant Connection Size			
Liquid Valve Size ("O.D.)	¾"	¾"	¾"
Suction Valve Size ("O.D.)	¾"	1½"	1½"
Valve Connection Type	Sweat	Sweat	Sweat
Refrigerant Charge	188	278	278
Expansion Device	TXV	TXV	TXV
Superheat at Service Valve	7-9°F	7-9°F	7-9°F
Subcooling at Service Valve			
High Stage	8-10°F	8-10°F	8-10°F
Low Stage	5-7°F	5-7°F	5-7°F
<b>ELECTRICAL DATA</b>			
Voltage-Phase-Hz	208/230-1-60	208/230-1-60	208/230-1-60
Minimum Circuit Ampacity <sup>2</sup>	21.9	29.3	38.8
Max. Overcurrent Protection <sup>3</sup>	35	50	60
Min / Max Volts	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	½" or ¾"	½" or ¾"	½" or ¾"
<b>EQUIPMENT WEIGHT (LBS)</b>	246	308	314
<b>SHIP WEIGHT (LBS)</b>	268	330	336

<sup>1</sup> Tested and rated in accordance with AHRI Standard 210/240

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**NOTES**

- Always check the rating plate for electrical data on the unit being installed.
- Installer will need to supply ¾" to 1½" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of ¾" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT, NOT THE INDOOR COIL.

COOLING DATA — DSZC180361A\*/CA\*F3743\*6\*\* +TXV/MBVC1600\*\* — LOW STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	24.8	25.7	28.1	-	24.2	25.1	27.5	-	23.6	24.5	26.8	-	23.1	23.9	26.2	-	21.9	22.7	24.9	-	20.3	21.0	23.0	-
	S/T	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.87	0.73	0.50	-	0.88	0.73	0.51	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
	kW	1.34	1.37	1.42	-	1.45	1.48	1.54	-	1.55	1.58	1.64	-	1.63	1.67	1.73	-	1.71	1.75	1.81	-	1.77	1.81	1.88	-
	Amps	5.3	5.4	5.6	-	5.7	5.9	6.1	-	6.2	6.4	6.6	-	6.7	6.8	7.1	-	7.1	7.3	7.5	-	7.5	7.7	8.0	-
956	MBh	24.1	24.9	27.3	-	23.5	24.4	26.7	-	22.9	23.8	26.1	-	22.4	23.2	25.4	-	21.3	22.0	24.1	-	19.7	20.4	22.4	-
	S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-
	kW	1.33	1.36	1.40	-	1.44	1.47	1.52	-	1.54	1.57	1.63	-	1.62	1.66	1.72	-	1.69	1.73	1.79	-	1.76	1.80	1.86	-
	Amps	5.3	5.4	5.6	-	5.7	5.8	6.0	-	6.2	6.3	6.5	-	6.6	6.8	7.0	-	7.0	7.2	7.5	-	7.5	7.6	7.9	-
744	MBh	22.2	23.0	25.2	-	21.7	22.5	24.6	-	21.2	21.9	24.0	-	20.7	21.4	23.5	-	19.6	20.3	22.3	-	18.2	18.8	20.6	-
	S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-
	ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-
	kW	1.29	1.32	1.37	-	1.40	1.43	1.48	-	1.50	1.53	1.58	-	1.58	1.61	1.67	-	1.65	1.69	1.75	-	1.71	1.75	1.81	-
	Amps	5.1	5.2	5.4	-	5.5	5.7	5.9	-	6.0	6.2	6.4	-	6.4	6.6	6.8	-	6.8	7.0	7.2	-	7.2	7.4	7.7	-
75	MBh	25.2	25.9	28.1	30.1	24.6	25.3	27.4	29.4	24.0	24.7	26.8	28.7	23.4	24.1	26.1	28.0	22.8	23.4	25.4	27.2	21.6	22.3	24.1	25.9
	S/T	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.92	0.83	0.63	0.40	0.95	0.85	0.65	0.42	0.99	0.89	0.67	0.43	20.6	21.2	23.0	24.7
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	22	20	16	11	22	20	16	11	20	18	15	10
	kW	1.35	1.38	1.43	1.48	1.46	1.50	1.55	1.60	1.56	1.60	1.65	1.71	1.65	1.69	1.75	1.81	1.72	1.76	1.83	1.89	1.79	1.83	1.89	1.96
	Amps	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.4	6.3	6.5	6.7	6.9	6.7	6.9	7.1	7.4	7.2	7.3	7.6	7.9	7.6	7.8	8.0	8.4
744	MBh	22.6	23.3	25.2	27.0	22.1	22.7	24.6	26.4	21.5	22.2	24.0	25.8	21.0	21.6	23.4	25.1	20.0	20.5	22.2	23.9	18.5	19.0	20.6	22.1
	S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11
	kW	1.31	1.34	1.38	1.43	1.41	1.45	1.50	1.55	1.51	1.54	1.60	1.65	1.59	1.63	1.69	1.75	1.66	1.70	1.76	1.82	1.72	1.77	1.83	1.89
	Amps	5.2	5.3	5.5	5.7	5.6	5.7	5.9	6.1	6.1	6.2	6.4	6.7	6.5	6.6	6.9	7.1	6.9	7.1	7.3	7.6	7.3	7.5	7.7	8.0

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. +fan)







COOLING DATA — DSZC180481A\*/CA\*F3743\*6\*\* +TXV/MBVC2000\*\* — LOW STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE									ENTERING INDOOR WET BULB TEMPERATURE														
		65°F			75°F			85°F			95°F			105°F			115°F								
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
<b>1350</b>	MBh	35.0	36.3	39.8	-	34.2	35.5	38.9	-	33.4	34.6	37.9	-	32.6	33.8	37.0	-	31.0	32.1	35.2	-	28.7	29.7	32.6	-
	S/T	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.72	0.50	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
	kW	1.85	1.89	1.96	-	2.01	2.05	2.13	-	2.14	2.20	2.27	-	2.27	2.32	2.40	-	2.37	2.43	2.51	-	2.46	2.52	2.61	-
<b>70</b>	Amps	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-
	Hi PR	209	225	237	-	234	252	266	-	266	287	303	-	303	326	345	-	341	367	388	-	377	406	429	-
	Lo PR	110	117	128	-	116	123	135	-	121	128	140	-	127	135	147	-	133	141	154	-	137	146	160	-
	MBh	34.0	35.3	38.6	-	33.2	34.4	37.7	-	32.4	33.6	36.8	-	31.6	32.8	35.9	-	30.1	31.2	34.1	-	27.8	28.9	31.6	-
<b>1200</b>	S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.47	-	0.83	0.69	0.48	-
	ΔT	19	16	12	-	19	16	12	-	19	16	13	-	19	17	13	-	19	16	12	-	18	15	12	-
	kW	1.84	1.88	1.94	-	1.99	2.04	2.11	-	2.13	2.18	2.25	-	2.25	2.30	2.38	-	2.35	2.40	2.49	-	2.44	2.49	2.58	-
	Amps	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-
<b>1050</b>	Hi PR	207	222	235	-	232	250	264	-	264	284	300	-	300	323	341	-	338	364	384	-	373	402	424	-
	Lo PR	109	116	126	-	115	122	133	-	119	127	139	-	125	133	146	-	131	140	153	-	136	145	158	-
	MBh	31.4	32.5	35.7	-	30.7	31.8	34.8	-	29.9	31.0	34.0	-	29.2	30.3	33.2	-	27.7	28.8	31.5	-	25.7	26.6	29.2	-
	S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-
<b>1350</b>	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-
	kW	1.87	1.91	1.98	2.05	2.03	2.07	2.14	2.22	2.16	2.22	2.29	2.37	2.29	2.34	2.42	2.51	2.39	2.45	2.53	2.63	2.48	2.54	2.63	2.73
	Amps	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	Hi PR	211	227	240	250	237	255	269	280	269	290	306	319	306	330	348	363	345	371	392	409	381	410	433	452
<b>75</b>	Lo PR	111	118	129	137	117	125	136	145	122	130	142	151	128	136	149	158	134	143	156	166	139	148	161	172
	MBh	34.6	35.6	38.5	41.4	33.8	34.8	37.7	40.4	33.0	34.0	36.8	39.4	32.2	33.1	35.9	38.5	30.6	31.5	34.1	36.6	28.3	29.2	31.6	33.9
	S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
<b>1200</b>	kW	1.85	1.89	1.96	2.03	2.01	2.05	2.13	2.20	2.15	2.20	2.27	2.35	2.27	2.32	2.40	2.49	2.37	2.43	2.51	2.60	2.46	2.52	2.61	2.70
	Amps	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	Hi PR	209	225	237	247	234	252	266	278	266	287	303	316	303	327	345	360	341	367	388	405	377	406	429	447
	Lo PR	110	117	128	136	116	124	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	160	170
<b>1050</b>	MBh	31.9	32.9	35.6	38.2	31.2	32.1	34.8	37.3	30.4	31.3	33.9	36.4	29.7	30.6	33.1	35.5	28.2	29.0	31.4	33.7	26.1	26.9	29.1	31.3
	S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.40
	ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	22	20	17	12	21	19	16	11
	kW	1.80	1.85	1.91	1.98	1.95	2.00	2.07	2.14	2.21	2.09	2.14	2.21	2.29	2.21	2.26	2.34	2.42	2.31	2.36	2.44	2.53	2.39	2.45	2.54
<b>1050</b>	Amps	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	Hi PR	203	218	230	240	227	245	258	269	258	278	294	306	294	317	334	349	331	356	376	392	366	394	416	434
	Lo PR	107	113	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	159	133	142	155	165
	MBh	34.6	35.6	38.5	41.4	33.8	34.8	37.7	40.4	33.0	34.0	36.8	39.4	32.2	33.1	35.9	38.5	30.6	31.5	34.1	36.6	28.3	29.2	31.6	33.9

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.

Shaded area is ACCA (TVA) conditions

kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)



COOLING DATA — DSZC180481A\*/CA\*F3743\*6\*\* +TXV/MBVC2000\*\* — LOW STAGE (CONT.)

Table with columns for IDB, AIRFLOW, and temperature ranges (65°F, 75°F, 85°F, 95°F, 105°F, 115°F). Rows include capacity (1350, 1200, 1050) and performance metrics (MBh, S/T, ΔT, kW, Amps, Hi PR, Lo PR).

Table with columns for IDB, AIRFLOW, and temperature ranges (65°F, 75°F, 85°F, 95°F, 105°F, 115°F). Rows include capacity (1350, 1200, 1050) and performance metrics (MBh, S/T, ΔT, kW, Amps, Hi PR, Lo PR).

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

Shaded area is AHRI (TVSA) conditions

kW = Total system power  
Amps = outdoor unit amps (comp. +fan)

COOLING DATA — DSZC180481A\*/CA\*F3743\*6\*\* +TXV/MBVC2000\*\* — HIGH STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE															ENTERING INDOOR WET BULB TEMPERATURE																																																
		65°F					75°F					85°F					95°F					105°F					115°F																																						
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75																																		
1969	MBh	49.0	50.8	55.6	-	47.9	49.6	54.3	-	46.7	48.4	53.1	-	45.6	47.2	51.8	-	43.3	44.9	49.2	-	40.1	41.6	45.5	-	43.3	44.9	49.2	-	40.1	41.6	45.5	-	40.1	41.6	45.5	-	40.1	41.6	45.5	-	0.87	0.72	0.50	-	16	14	11	-	16	14	11	-	16	14	11	-	16	14	11	-	16	14	11	-
	S/T	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.72	0.50	-	0.86	0.72	0.50	-	0.87	0.72	0.50	-	0.87	0.72	0.50	-	0.87	0.72	0.50	-	0.87	0.72	0.50	-	0.87	0.72	0.50	-																
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-																
	kW	2.88	2.94	3.04	-	3.10	3.17	3.28	-	3.31	3.38	3.49	-	3.48	3.56	3.68	-	3.63	3.72	3.84	-	3.76	3.85	3.98	-	3.63	3.72	3.84	-	3.76	3.85	3.98	-	3.76	3.85	3.98	-	3.76	3.85	3.98	-	3.76	3.85	3.98	-	3.76	3.85	3.98	-																
	Amps	10.3	10.6	10.9	-	11.2	11.5	11.8	-	12.2	12.5	12.9	-	13.1	13.4	13.9	-	13.9	14.3	14.8	-	14.8	15.2	15.7	-	13.9	14.3	14.8	-	14.8	15.2	15.7	-	14.8	15.2	15.7	-	14.8	15.2	15.7	-	14.8	15.2	15.7	-	14.8	15.2	15.7	-																
	Hi PR	214	231	244	-	241	259	273	-	274	295	311	-	312	335	354	-	351	377	399	-	387	417	440	-	351	377	399	-	387	417	440	-	387	417	440	-	387	417	440	-	387	417	440	-	387	417	440	-																
	Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	132	141	154	-	128	136	149	-	132	141	154	-	132	141	154	-	132	141	154	-	132	141	154	-	132	141	154	-																
70	MBh	47.6	49.3	54.0	-	46.5	48.2	52.8	-	45.4	47.0	51.5	-	44.3	45.9	50.3	-	42.0	43.6	47.7	-	38.9	40.4	44.2	-	42.0	43.6	47.7	-	38.9	40.4	44.2	-	38.9	40.4	44.2	-	38.9	40.4	44.2	-	42.0	43.6	47.7	-	38.9	40.4	44.2	-																
	S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.83	0.69	0.48	-	0.82	0.68	0.47	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-																
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	18	16	12	-	17	15	11	-	17	15	11	-	17	15	11	-	18	16	12	-	17	15	11	-																
	kW	2.85	2.92	3.01	-	3.08	3.15	3.25	-	3.28	3.35	3.46	-	3.45	3.53	3.65	-	3.60	3.68	3.81	-	3.73	3.82	3.95	-	3.60	3.68	3.81	-	3.73	3.82	3.95	-	3.73	3.82	3.95	-	3.73	3.82	3.95	-	3.73	3.82	3.95	-	3.73	3.82	3.95	-																
	Amps	10.2	10.5	10.8	-	11.1	11.3	11.7	-	12.1	12.4	12.8	-	12.9	13.3	13.7	-	13.8	14.1	14.6	-	14.7	15.0	15.6	-	13.8	14.1	14.6	-	14.7	15.0	15.6	-	14.7	15.0	15.6	-	14.7	15.0	15.6	-	14.7	15.0	15.6	-	14.7	15.0	15.6	-																
	Hi PR	212	229	241	-	238	256	271	-	271	292	308	-	309	332	351	-	347	374	395	-	384	413	436	-	347	374	395	-	384	413	436	-	384	413	436	-	384	413	436	-	384	413	436	-	384	413	436	-																
	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-	127	135	147	-	131	140	152	-	131	140	152	-	131	140	152	-	127	135	147	-	131	140	152	-																
1531	MBh	43.9	45.5	49.9	-	42.9	44.4	48.7	-	41.9	43.4	47.5	-	40.8	42.3	46.4	-	38.8	40.2	44.1	-	35.9	37.3	40.8	-	40.8	42.3	46.4	-	38.8	40.2	44.1	-	38.8	40.2	44.1	-	38.8	40.2	44.1	-	40.8	42.3	46.4	-	38.8	40.2	44.1	-																
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-																
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	19	16	12	-	17	15	11	-	17	15	11	-	17	15	11	-	19	16	12	-	17	15	11	-																
	kW	2.78	2.84	2.94	-	3.00	3.07	3.17	-	3.20	3.27	3.37	-	3.37	3.44	3.56	-	3.51	3.59	3.71	-	3.64	3.72	3.84	-	3.51	3.59	3.71	-	3.64	3.72	3.84	-	3.64	3.72	3.84	-	3.64	3.72	3.84	-	3.64	3.72	3.84	-	3.64	3.72	3.84	-																
	Amps	9.9	10.2	10.5	-	10.7	11.0	11.4	-	11.7	12.0	12.4	-	12.6	12.9	13.3	-	13.4	13.7	14.2	-	14.2	14.6	15.1	-	13.4	13.7	14.2	-	14.2	14.6	15.1	-	14.2	14.6	15.1	-	14.2	14.6	15.1	-	14.2	14.6	15.1	-	14.2	14.6	15.1	-																
	Hi PR	206	222	234	-	231	249	263	-	263	283	299	-	299	322	340	-	337	362	383	-	372	400	423	-	337	362	383	-	372	400	423	-	372	400	423	-	372	400	423	-	372	400	423	-	372	400	423	-																
	Lo PR	102	108	118	-	108	114	125	-	112	119	130	-	117	125	136	-	123	131	143	-	127	135	148	-	123	131	143	-	127	135	148	-	127	135	148	-	127	135	148	-	127	135	148	-	127	135	148	-																
1969	MBh	49.8	51.3	55.5	59.6	48.7	50.1	54.2	58.2	47.5	48.9	52.9	56.8	46.4	47.7	51.7	55.4	44.0	45.3	49.1	52.7	40.8	42.0	45.5	48.8	44.0	45.3	49.1	52.7	40.8	42.0	45.5	48.8	44.0	45.3	49.1	52.7	40.8	42.0	45.5	48.8	44.0	45.3	49.1	52.7	40.8	42.0	45.5	48.8																
	S/T	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41																
	ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10																
	kW	2.90	2.96	3.06	3.16	3.13	3.20	3.31	3.42	3.33	3.41	3.52	3.64	3.51	3.59	3.71	3.84	3.67	3.75	3.88	4.01	3.80	3.88	4.02	4.16	3.67	3.75	3.88	4.01	3.80	3.88	4.02	4.16	3.67	3.75	3.88	4.01	3.80	3.88	4.02	4.16	3.80	3.88	4.02	4.16	3.80	3.88	4.02	4.16																
	Amps	10.4	10.7	11.0	11.4	11.3	11.6	12.0	12.4	12.3	12.6	13.0	13.6	13.2	13.5	14.0	14.5	14.1	14.4	14.9	15.5	14.9	15.3	15.9	16.5	14.1	14.4	14.9	15.5	14.9	15.3	15.9	16.5	14.1	14.4	14.9	15.5	14.9	15.3	15.9	16.5	14.9	15.3	15.9	16.5	14.9	15.3	15.9	16.5																
	Hi PR	217	233	246	257	243	262	276	288	277	298	314	328	315	339	358	373	354	381	403	420	391	421	445	464	354	381	403	420	391	421	445	464	354	381	403	420	391	421	445	464	391	421	445	464	391	421	445	464																
	Lo PR	107	114	124	132	113	120	131	140	118	125	137	145	123	131	143	153	129	138	150	160	134	142	155	166	129	138	150	160	134	142	155	166	129	138	150	160	134	142	155	166	134	142	155	166	134	142	155	166																
75	MBh	48.4	49.8	53.9	57.9	47.3	48.6	52.7	56.5	46.1	47.5	51.4	55.2	45.0	46.3	50.2	53.8	42.8	44.0	47.6	51.1	39.6	40.8	44.1	47.4	42.8	44.0	47.6	51.1	39.6	40.8	44.1	47.4	42.8	44.0	47.6	51.1	39.6	40.8	44.1	47.4	42.8	44.0	47.6	51.1	39.6	40.8	44.1	47.4																
	S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41	0.93	0																																						

COOLING DATA — DSZC180481A\*/CA\*F3743\*6\*\* + TXV/MBVC2000\*\* — HIGH STAGE (CONT.)

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
1969	MBh	50.7	51.8	55.4	59.2	49.5	50.6	54.1	57.8	48.4	49.4	52.8	56.4	47.2	48.2	51.5	55.1	44.8	45.8	48.9	52.3	41.5	42.4	45.3	48.4
	S/T	0.94	0.88	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.62
	ΔT	22	21	19	15	23	22	19	15	23	22	19	15	22	22	19	15	21	21	19	15	19	20	17	14
	kW	2.93	2.99	3.09	3.19	3.16	3.23	3.33	3.45	3.36	3.44	3.55	3.67	3.54	3.62	3.75	3.87	3.70	3.78	3.91	4.05	3.83	3.92	4.05	4.19
	Amps	10.5	10.8	11.1	11.6	11.4	11.7	12.1	12.5	12.4	12.7	13.2	13.7	13.3	13.6	14.1	14.7	14.2	14.6	15.1	15.7	15.1	15.5	16.0	16.6
1750	MBh	49.2	50.3	53.8	57.5	48.1	49.1	52.5	56.1	46.9	48.0	51.3	54.8	45.8	46.8	50.0	53.5	43.5	44.5	47.5	50.8	40.3	41.2	44.0	47.0
	S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.97	0.79	0.59
	ΔT	23	22	19	15	23	22	20	16	23	23	20	16	24	23	20	16	23	22	19	16	21	21	18	15
	kW	2.90	2.96	3.06	3.16	3.13	3.20	3.31	3.42	3.33	3.41	3.52	3.64	3.51	3.59	3.71	3.84	3.67	3.75	3.88	4.01	3.80	3.88	4.02	4.16
	Amps	10.4	10.7	11.0	11.5	11.3	11.6	12.0	12.4	12.3	12.6	13.0	13.6	13.2	13.5	14.0	14.5	14.1	14.4	14.9	15.5	14.9	15.3	15.9	16.5
1531	MBh	45.4	46.4	49.6	53.0	44.4	45.4	48.5	51.8	43.3	44.3	47.3	50.6	42.3	43.2	46.2	49.3	40.2	41.0	43.8	46.9	37.2	38.0	40.6	43.4
	S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15
	kW	2.83	2.89	2.98	3.08	3.05	3.12	3.22	3.33	3.25	3.32	3.43	3.55	3.42	3.50	3.62	3.74	3.57	3.65	3.78	3.91	3.70	3.78	3.91	4.05
	Amps	10.1	10.4	10.7	11.1	11.0	11.2	11.6	12.1	11.9	12.3	12.7	13.2	12.8	13.1	13.6	14.1	13.7	14.0	14.5	15.1	14.5	14.9	15.4	16.0

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
1969	MBh	51.6	52.6	55.1	58.8	50.4	51.4	53.8	57.4	49.2	50.2	52.5	56.0	48.0	48.9	51.2	54.7	45.6	46.5	48.7	51.9	42.2	43.1	45.1	48.1
	S/T	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.98	0.79	1.00	1.00	0.99	0.80
	ΔT	24	23	22	19	24	24	22	19	23	23	22	19	22	23	23	19	21	22	22	19	20	20	21	18
	kW	2.95	3.01	3.11	3.22	3.18	3.25	3.36	3.48	3.39	3.47	3.58	3.71	3.57	3.65	3.78	3.91	3.73	3.81	3.94	4.08	3.86	3.95	4.09	4.23
	Amps	10.6	10.9	11.2	11.7	11.5	11.8	12.2	12.7	12.5	12.9	13.3	13.8	13.4	13.8	14.3	14.8	14.3	14.7	15.2	15.8	15.2	15.6	16.2	16.8
1750	MBh	50.1	51.1	53.5	57.1	48.9	49.9	52.2	55.7	47.8	48.7	51.0	54.4	46.6	47.5	49.8	53.1	44.3	45.1	47.3	50.4	41.0	41.8	43.8	46.7
	S/T	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76
	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	24	25	23	20	23	24	23	20	22	22	22	19
	kW	2.93	2.99	3.09	3.19	3.16	3.23	3.33	3.45	3.36	3.44	3.55	3.67	3.54	3.62	3.75	3.87	3.70	3.78	3.91	4.05	3.83	3.92	4.05	4.19
	Amps	10.5	10.8	11.1	11.6	11.4	11.7	12.1	12.5	12.4	12.7	13.2	13.7	13.3	13.6	14.1	14.7	14.2	14.6	15.1	15.7	15.1	15.5	16.0	16.6
1531	MBh	46.2	47.1	49.4	52.7	45.2	46.0	48.2	51.4	44.1	44.9	47.1	50.2	43.0	43.8	45.9	49.0	40.9	41.7	43.6	46.5	37.9	38.6	40.4	43.1
	S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
	ΔT	25	25	23	20	25	25	24	20	25	25	24	21	26	25	24	21	25	25	24	20	23	23	22	19
	kW	2.85	2.92	3.01	3.11	3.08	3.15	3.25	3.36	3.28	3.35	3.46	3.58	3.45	3.53	3.65	3.77	3.60	3.68	3.81	3.94	3.73	3.82	3.95	4.08
	Amps	10.2	10.5	10.8	11.2	11.1	11.3	11.7	12.2	12.1	12.4	12.8	13.3	12.9	13.3	13.7	14.3	13.8	14.1	14.6	15.2	14.6	15.0	15.5	16.2

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TV) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

### COOLING DATA — DSZC180601B / CAPF4961D6\* +TXV / MBVC2000A — Low Stage

		OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
		ENTERING INDOOR WET BULB TEMPERATURE																													
		IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	1350	MBh	40.0	41.5	45.5	-	39.1	40.5	44.4	-	38.2	39.6	43.3	-	37.2	38.6	42.3	-	35.4	36.7	40.2	-	32.8	34.0	37.2	-					
		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-					
		DT	20	17	13	-	20	18	13	-	20	18	13	-	20	18	13	-	20	17	13	-	19	16	12	-					
		kW	2.22	2.27	2.35	-	2.41	2.46	2.55	-	2.57	2.63	2.72	-	2.71	2.77	2.87	-	2.83	2.90	3.00	-	2.93	3.00	3.11	-					
		Amps	7.9	8.1	8.3	-	8.5	8.7	9.0	-	9.2	9.4	9.7	-	9.8	10.1	10.4	-	10.5	10.7	11.1	-	11.1	11.3	11.7	-					
	1200	Hi PR	206	222	234	-	231	249	263	-	263	283	299	-	300	322	340	-	337	363	383	-	372	401	423	-					
		Lo PR	107	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-					
		MBh	38.9	40.3	44.1	-	38.0	39.3	43.1	-	37.1	38.4	42.1	-	36.2	37.5	41.1	-	34.3	35.6	39.0	-	31.8	33.0	36.1	-					
		S/T	0.70	0.58	0.40	-	0.72	0.61	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.80	0.66	0.46	-	0.80	0.67	0.46	-					
		DT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	20	17	13	-					
1050	kW	2.21	2.26	2.33	-	2.39	2.44	2.52	-	2.55	2.60	2.69	-	2.69	2.75	2.84	-	2.81	2.87	2.97	-	2.91	2.98	3.08	-						
	Amps	7.8	8.0	8.3	-	8.4	8.6	8.9	-	9.1	9.4	9.7	-	9.8	10.0	10.3	-	10.4	10.6	11.0	-	11.0	11.2	11.6	-						
	Hi PR	204	220	232	-	229	246	260	-	260	280	296	-	297	319	337	-	334	359	379	-	369	397	419	-						
	Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-						
	MBh	35.9	37.2	40.7	-	35.0	36.3	39.8	-	34.2	35.5	38.8	-	33.4	34.6	37.9	-	31.7	32.9	36.0	-	29.4	30.4	33.3	-						
S/T	0.67	0.56	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.77	0.65	0.45	-							
DT	21	18	14	-	21	19	14	-	21	19	14	-	22	19	14	-	21	18	14	-	20	17	13	-							
75	kW	2.15	2.20	2.27	-	2.33	2.38	2.46	-	2.48	2.54	2.62	-	2.62	2.68	2.77	-	2.73	2.79	2.89	-	2.83	2.90	3.00	-						
	Amps	7.6	7.8	8.0	-	8.2	8.4	8.7	-	8.9	9.1	9.4	-	9.5	9.7	10.0	-	10.1	10.3	10.7	-	10.7	10.9	11.3	-						
	Hi PR	198	213	225	-	222	239	252	-	253	272	287	-	288	310	327	-	324	348	368	-	358	385	406	-						
	Lo PR	103	110	120	-	109	116	127	-	113	121	132	-	119	127	138	-	125	133	145	-	129	137	150	-						
	MBh	40.7	41.9	45.4	48.7	39.8	40.9	44.3	47.6	38.8	40.0	43.3	46.4	37.9	39.0	42.2	45.3	36.0	37.0	40.1	43.0	33.3	34.3	37.1	39.9						
S/T	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42							
DT	23	21	17	12	23	22	18	12	23	22	18	12	24	22	18	12	23	21	18	12	22	20	16	11							
1350	kW	2.24	2.29	2.37	2.45	2.43	2.48	2.57	2.66	2.59	2.65	2.74	2.84	2.73	2.80	2.89	3.00	2.85	2.92	3.02	3.13	2.96	3.03	3.14	3.25						
	Amps	8.0	8.1	8.4	8.7	8.6	8.8	9.1	9.4	9.3	9.5	9.8	10.2	9.9	10.2	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.4	11.8	12.3						
	Hi PR	208	224	237	247	234	251	266	277	266	286	302	315	303	326	344	359	340	366	387	404	376	405	427	446						
	Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168						
	MBh	39.5	40.7	44.0	47.3	38.6	39.7	43.0	46.2	37.7	38.8	42.0	45.1	36.8	37.9	41.0	44.0	34.9	36.0	38.9	41.8	32.4	33.3	36.1	38.7						
S/T	0.79	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.84	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.82	0.62	0.40							
DT	24	22	18	13	24	22	18	13	24	22	18	13	25	23	19	13	24	22	18	13	23	21	17	12							
1200	kW	2.23	2.28	2.35	2.43	2.41	2.46	2.55	2.63	2.57	2.63	2.72	2.81	2.71	2.77	2.87	2.97	2.83	2.90	3.00	3.10	2.93	3.00	3.11	3.22						
	Amps	7.9	8.1	8.3	8.6	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.1	9.8	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.3	11.7	12.2						
	Hi PR	206	222	234	244	231	249	263	274	263	283	299	312	300	322	341	355	337	363	383	400	372	401	423	441						
	Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166						
	MBh	36.5	37.6	40.7	43.6	35.6	36.7	39.7	42.6	34.8	35.8	38.8	41.6	33.9	34.9	37.8	40.6	32.2	33.2	35.9	38.6	29.9	30.7	33.3	35.7						
S/T	0.77	0.69	0.52	0.33	0.79	0.71	0.54	0.35	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.88	0.79	0.60	0.38							
DT	24	23	18	13	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13	23	21	17	12							
1050	kW	2.17	2.22	2.29	2.37	2.35	2.40	2.48	2.56	2.50	2.56	2.65	2.74	2.64	2.70	2.79	2.89	2.76	2.82	2.92	3.02	2.86	2.92	3.03	3.13						
	Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.7	9.1	9.0	9.2	9.5	9.8	9.6	9.8	10.1	10.5	10.2	10.4	10.8	11.2	10.8	11.0	11.4	11.8						
	Hi PR	200	215	227	237	224	241	255	266	255	275	290	302	291	313	330	344	327	352	372	388	361	389	411	428						
	Lo PR	104	111	121	129	110	117	128	136	114	122	133	142	120	128	140	149	126	134	146	156	130	139	151	161						
	MBh	33.3	34.3	37.1	39.9	33.3	34.3	37.1	39.9	33.3	34.3	37.1	39.9	33.3	34.3	37.1	39.9	33.3	34.3	37.1	39.9	33.3	34.3	37.1	39.9						

Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.

High and low pressures are measured at the liquid and suction service valves.

# COOLING DATA — DSZC180601B / CAPF4961D6\* +TXV / MBVC2000A — Low Stage (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79
<b>80</b>	1350	MBh	41.4	42.3	45.2	48.4	40.5	41.4	44.2	47.2	50.4	43.1	46.1	49.1	52.1	42.1	45.0	48.0	51.0	54.0	36.6	37.4	40.0	42.7	45.4	48.1	50.8	53.5	56.2	58.9	33.9	34.7	37.0	39.6			
		S/T	0.91	0.86	0.70	0.52	0.35	0.89	0.72	0.54	0.37	0.20	0.91	0.74	0.55	0.38	0.94	0.77	0.57	0.40	0.23	1.00	1.00	0.79	0.59	0.39	0.19	0.00	0.00	1.00	1.00	0.80	0.60				
		DT	26	25	21	17	13	26	25	22	17	12	26	25	22	17	12	26	25	22	18	13	25	25	22	17	12	7	2	23	24	20	16				
		kW	2.26	2.31	2.39	2.47	2.55	2.45	2.50	2.59	2.68	2.76	2.67	2.77	2.86	2.94	2.82	2.92	3.02	3.11	3.20	2.88	2.95	3.05	3.16	3.25	3.34	3.43	3.52	3.61	3.69	3.06	3.16	3.28			
		Amps	8.0	8.2	8.5	8.8	9.1	8.9	9.1	9.5	9.8	10.0	9.6	9.9	10.3	10.6	10.3	10.6	11.0	11.3	11.6	10.7	10.9	11.3	11.7	12.0	12.3	12.6	12.9	11.3	11.5	11.9	12.4				
		Hi PR	210	226	239	249	260	254	268	280	290	296	289	305	318	326	319	330	337	343	349	344	370	391	408	426	443	460	477	494	511	528	432	450			
	Lo PR	110	117	127	136	143	135	143	151	159	164	149	160	168	176	165	176	184	192	199	133	141	151	161	171	181	191	201	210	220	230	146	159	170			
	MBh	40.2	41.1	43.9	46.9	49.9	39.3	40.1	42.9	45.9	48.9	39.2	41.9	44.8	47.7	38.2	40.9	43.7	46.5	49.3	35.5	36.3	38.8	41.5	44.2	46.9	49.6	52.3	55.0	57.7	60.4	63.1	38.4				
	S/T	0.87	0.82	0.67	0.50	0.33	0.90	0.85	0.69	0.52	0.35	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.37	0.99	0.93	0.76	0.57	0.38	0.19	0.00	0.00	1.00	1.00	0.94	0.76	0.57				
	DT	27	26	22	18	14	27	26	23	18	13	27	26	23	18	13	27	26	23	18	13	27	26	23	18	13	8	3	25	24	21	17					
	kW	2.24	2.29	2.37	2.45	2.53	2.43	2.48	2.57	2.66	2.74	2.65	2.74	2.84	2.92	2.80	2.89	2.98	3.06	3.14	2.86	2.92	3.02	3.13	3.23	3.32	3.41	3.50	3.59	3.03	3.14	3.25					
	Amps	8.0	8.1	8.4	8.7	9.0	8.6	8.8	9.1	9.4	9.7	9.3	9.5	9.8	10.2	9.9	10.2	10.5	10.9	11.2	10.6	10.8	11.2	11.6	12.0	12.4	12.8	13.2	11.2	11.4	11.8	12.3					
Hi PR	208	224	237	247	257	234	251	266	277	284	266	286	302	315	303	326	344	359	374	341	366	387	404	421	438	455	472	489	506	523	404	428	446				
Lo PR	109	116	126	134	142	115	122	133	142	151	127	138	147	155	125	133	145	155	164	131	140	152	162	171	180	189	198	207	216	225	144	158	168				
MBh	37.1	37.9	40.5	43.3	46.1	36.3	37.1	39.6	42.3	45.0	36.2	38.6	41.3	44.0	34.5	35.3	37.7	40.3	42.9	32.8	33.5	35.8	38.3	40.8	43.3	45.8	48.3	50.8	53.3	55.8	58.3	35.5					
S/T	0.84	0.79	0.64	0.48	0.32	0.87	0.82	0.67	0.50	0.34	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.53	0.36	0.96	0.90	0.73	0.55	0.37	0.19	0.00	0.00	1.00	1.00	0.91	0.74	0.55					
DT	27	26	23	18	13	28	27	23	18	13	28	27	23	18	13	28	27	23	18	13	27	26	23	18	13	8	3	26	25	21	17						
kW	2.19	2.24	2.31	2.39	2.47	2.37	2.42	2.50	2.59	2.67	2.58	2.67	2.76	2.84	2.72	2.82	2.92	3.00	3.08	2.78	2.84	2.94	3.05	3.15	3.24	3.33	3.42	2.88	2.95	3.05	3.16						
Amps	7.7	7.9	8.2	8.5	8.8	8.4	8.5	8.8	9.1	9.4	9.1	9.3	9.6	9.9	9.7	9.9	10.2	10.6	10.9	10.3	10.5	10.9	11.3	11.7	12.1	12.5	12.9	10.9	11.1	11.5	11.9						
Hi PR	202	217	230	239	249	227	244	258	269	276	258	277	293	306	294	316	334	348	362	330	355	375	391	407	423	439	455	471	487	503	391	415	433				
Lo PR	105	112	122	130	138	111	118	129	138	146	116	123	134	143	121	129	141	150	158	127	135	148	157	165	173	181	189	201	213	225	140	153	163				
<b>85</b>	1350	MBh	42.2	43.0	45.0	48.0	41.2	42.0	44.0	46.9	49.9	41.0	42.9	45.8	48.7	40.0	41.9	44.7	47.5	50.4	37.3	38.0	39.8	42.4	45.1	47.8	50.5	53.2	55.9	58.6	61.3	34.5					
		S/T	0.96	0.92	0.83	0.68	0.51	0.99	0.96	0.86	0.70	0.54	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.74	0.56	1.00	1.00	0.95	0.77	0.59	0.41	0.23	0.05	0.05	1.00	1.00	0.96	0.78			
		DT	28	27	26	22	18	28	27	26	22	18	27	27	26	22	18	27	27	26	23	25	26	26	22	18	14	10	24	24	20	16					
		kW	2.28	2.33	2.41	2.50	2.58	2.47	2.53	2.61	2.70	2.79	2.64	2.70	2.79	2.89	2.78	2.85	2.95	3.05	3.14	2.91	2.97	3.08	3.19	3.29	3.38	3.47	3.01	3.08	3.19	3.31					
		Amps	8.1	8.3	8.5	8.9	9.2	8.7	8.9	9.2	9.6	9.9	9.5	9.7	10.0	10.4	10.1	10.4	10.7	11.1	11.4	10.7	11.0	11.4	11.8	12.2	12.5	12.8	11.4	11.7	12.0	12.5					
		Hi PR	212	229	241	252	262	238	257	271	283	291	271	292	308	321	309	332	351	366	379	347	374	395	412	429	446	463	480	497	514	436	455				
	Lo PR	111	118	129	137	145	117	124	136	145	153	122	129	141	150	128	136	148	158	166	134	142	155	166	175	184	193	202	211	220	147	161	171				
	MBh	40.9	41.7	43.7	46.6	49.5	40.0	40.7	42.7	45.5	48.3	39.0	39.8	41.7	44.4	38.1	38.8	40.6	43.4	46.1	36.2	36.9	38.6	41.2	43.8	46.4	49.0	51.6	54.2	56.8	59.4	62.0	38.2				
	S/T	0.91	0.88	0.80	0.65	0.49	0.95	0.91	0.82	0.67	0.51	0.97	0.94	0.85	0.69	1.00	0.97	0.87	0.71	0.54	1.00	1.00	0.91	0.74	0.56	0.38	0.20	0.02	0.02	1.00	1.00	0.91	0.74				
	DT	29	28	27	23	19	29	29	27	23	19	29	29	27	23	19	29	29	27	24	28	28	27	23	19	15	11	26	26	22	18						
	kW	2.26	2.31	2.39	2.47	2.55	2.45	2.50	2.59	2.68	2.76	2.61	2.67	2.77	2.86	2.76	2.82	2.92	3.02	3.11	2.88	2.95	3.05	3.16	3.25	3.34	3.43	2.99	3.06	3.16	3.28						
	Amps	8.0	8.2	8.5	8.8	9.1	8.7	8.9	9.1	9.5	9.8	9.4	9.6	9.9	10.3	10.0	10.3	10.6	11.0	11.3	10.7	10.9	11.3	11.7	12.1	12.4	12.7	11.3	11.5	11.9	12.4						
Hi PR	210	226	239	249	259	236	254	268	280	286	268	289	305	318	306	329	347	362	376	344	370	391	408	425	442	459	476	493	510	432	450						
Lo PR	110	117	127	136	144	116	123	135	143	151	120	128	140	149	126	135	147	156	164	133	141	154	164	173	182	191	200	209	218	146	159	170					
MBh	37.8	38.5	40.3	43.0	45.7	36.9	37.6	39.4	42.0	44.6	36.0	36.7	38.5	41.0	35.1	35.8	37.5	40.0	42.5	33.4	34.0	35.6	38.0	40.4	42.8	45.2	47.6	50.0	52.4	54.8	57.2	35.2					
S/T	0.88	0.85	0.77	0.62	0.46	0.91	0.88	0.80	0.65	0.49	0.94	0.90	0.82	0.66	1.00	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	0.54	0.37	0.20	0.03	0.03	1.00	0.98	0.88	0.71					
DT	29	29	27	23	19	30	29	27	24	20	30	29	27	24	20	29	29	28	24	29	29	27	24	21	17	13	27	27	25	22							
kW	2.21	2.26	2.33	2.41	2.49	2.39	2.44	2.52	2.61	2.69	2.54	2.60	2.69	2.79	2.69	2.75	2.84	2.94	3.03	2.80	2.87	2.97	3.07	3.17	3.26	3.35	2.91	2.98	3.08	3.19							
Amps	7.8	8.0	8.3	8.5	8.8	8.4	8.6	8.9	9.2	9.4	9.1	9.4	9.7	10.0	9.7	10.0	10.3	10.7	11.0	10.4	10.6	11.0	11.4	11.8	12.2	11.0	11.2	11.6	12.0								
Hi PR	204	220	232	242	251	229	246	260	271	277	260	280	296	309	297	319	337	351	364	334	359	379	395	411	427	443	459	475	491	507	419	437					
Lo PR	106	113	124	132	140	112	120	131	139	146	117	124	136	144	123	131	142	152	161	129	137	149	159	168	177	186	195	204	213	141	154	165					

Shaded area is AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)  
 IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.

COOLING DATA — DSZC180601B / CAPF4961D6\* +TXV / MBVC2000A — HIGH STAGE

		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE																			
		65°F				75°F				85°F				95°F				105°F				115°F											
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
2000	MBh	54.6	56.5	62.0	-	53.3	55.2	60.5	-	52.0	53.9	59.1	-	50.8	52.6	57.6	-	48.2	50.0	54.8	-	44.7	46.3	50.7	-	-	-	-	-	-	-	-	-
	S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-	-	-	-	-	-	-	-	-
	DT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	-	-	-	-	-	-	-	-
	kW	3.48	3.55	3.67	-	3.75	3.83	3.95	-	3.98	4.07	4.20	-	4.19	4.28	4.42	-	4.37	4.46	4.61	-	4.52	4.62	4.77	-	-	-	-	-	-	-	-	-
	Amps	13.0	13.3	13.8	-	14.1	14.4	14.9	-	15.3	15.7	16.2	-	16.4	16.8	17.4	-	17.5	17.9	18.5	-	18.5	19.0	19.7	-	-	-	-	-	-	-	-	-
1800	MBh	33.8	35.7	41.2	-	32.5	34.4	39.9	-	31.2	33.1	38.6	-	29.9	31.8	37.3	-	28.6	30.5	36.0	-	27.3	29.2	34.7	-	-	-	-	-	-	-	-	-
	S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	-	-	-	-	-	-	-	-
	DT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	-	-	-	-	-	-	-	-
	kW	3.46	3.53	3.65	-	3.73	3.81	3.93	-	3.96	4.05	4.18	-	4.17	4.26	4.40	-	4.34	4.44	4.58	-	4.49	4.59	4.75	-	-	-	-	-	-	-	-	-
	Amps	12.9	13.2	13.7	-	14.0	14.3	14.8	-	15.2	15.6	16.1	-	16.3	16.7	17.3	-	17.4	17.8	18.4	-	18.4	18.9	19.5	-	-	-	-	-	-	-	-	-
1600	MBh	23.8	25.7	31.2	-	22.5	24.4	29.9	-	21.2	23.1	28.6	-	20.0	21.9	27.4	-	18.7	20.6	26.1	-	17.4	19.3	24.8	-	-	-	-	-	-	-	-	-
	S/T	0.67	0.56	0.39	-	0.70	0.58	0.40	-	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.77	0.64	0.45	-	-	-	-	-	-	-	-	-
	DT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-	-	-	-	-	-	-	-	-
	kW	3.41	3.48	3.59	-	3.67	3.74	3.86	-	3.90	3.98	4.11	-	4.10	4.19	4.32	-	4.27	4.36	4.51	-	4.42	4.52	4.67	-	-	-	-	-	-	-	-	-
	Amps	12.7	13.0	13.4	-	13.7	14.1	14.5	-	14.9	15.3	15.8	-	16.0	16.4	16.9	-	17.0	17.5	18.1	-	18.1	18.5	19.2	-	-	-	-	-	-	-	-	-
2000	MBh	55.5	57.1	61.8	66.4	54.2	55.8	60.4	64.8	52.9	54.5	59.0	63.3	51.6	53.1	57.5	61.7	49.0	50.5	54.6	58.6	45.4	46.8	50.6	54.3	-	-	-	-	-	-	-	-
	S/T	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42	-	-	-	-	-	-	-	-
	DT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	-	-	-	-	-	-	-	-
	kW	3.51	3.58	3.70	3.81	3.78	3.86	3.98	4.11	4.02	4.10	4.24	4.38	4.23	4.32	4.46	4.61	4.40	4.50	4.65	4.81	4.56	4.66	4.82	4.98	-	-	-	-	-	-	-	-
	Amps	13.1	13.4	13.9	14.4	14.2	14.6	15.1	15.6	15.5	15.9	16.4	17.0	16.6	17.0	17.5	18.2	17.6	18.1	18.7	19.4	18.7	19.2	19.8	20.6	-	-	-	-	-	-	-	-
1800	MBh	34.7	36.3	41.8	46.4	33.4	35.0	40.5	45.1	32.1	33.7	39.2	43.8	30.8	32.4	37.9	42.5	29.5	31.1	36.6	41.2	28.2	29.8	35.3	39.9	-	-	-	-	-	-	-	-
	S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40	-	-	-	-	-	-	-	-
	DT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11	-	-	-	-	-	-	-	-
	kW	3.49	3.56	3.67	3.79	3.76	3.84	3.96	4.09	3.99	4.08	4.21	4.35	4.20	4.29	4.43	4.58	4.38	4.48	4.62	4.78	4.53	4.63	4.79	4.95	-	-	-	-	-	-	-	-
	Amps	13.0	13.4	13.8	14.3	14.1	14.5	15.0	15.5	15.4	15.7	16.3	16.9	16.4	16.9	17.4	18.1	17.5	18.0	18.6	19.3	18.6	19.1	19.7	20.5	-	-	-	-	-	-	-	-
1600	MBh	24.7	26.3	31.8	36.4	23.4	25.0	30.5	35.1	22.1	23.7	29.2	33.8	20.8	22.4	27.9	32.5	19.5	21.1	26.6	31.2	18.2	19.8	25.3	29.9	-	-	-	-	-	-	-	-
	S/T	0.76	0.68	0.52	0.33	0.79	0.71	0.54	0.35	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.88	0.79	0.59	0.38	-	-	-	-	-	-	-	-
	DT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	-	-	-	-	-	-	-	-
	kW	3.43	3.51	3.62	3.73	3.70	3.78	3.90	4.02	3.93	4.01	4.14	4.28	4.13	4.22	4.36	4.51	4.31	4.40	4.55	4.70	4.45	4.55	4.71	4.86	-	-	-	-	-	-	-	-
	Amps	12.8	13.1	13.5	14.1	13.9	14.2	14.7	15.2	15.1	15.5	16.0	16.6	16.1	16.5	17.1	17.8	17.2	17.6	18.2	18.9	18.2	18.7	19.3	20.1	-	-	-	-	-	-	-	-

Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. fan)

COOLING DATA — DSZC180601B / CAPF4961D6\* +TXV / MBVC2000A — HIGH STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
2000	MBh	56.5	57.7	61.6	65.9	55.2	56.4	60.2	64.4	53.8	55.0	58.8	62.8	52.5	53.7	57.3	61.3	49.9	51.0	54.5	58.2	46.2	47.2	50.5	53.9
	S/T	0.91	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.98	0.79	0.59	1.00	0.98	0.80	0.60
	DT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15
	kW	3.54	3.61	3.73	3.85	3.81	3.89	4.02	4.15	4.05	4.14	4.27	4.41	4.26	4.35	4.50	4.65	4.44	4.54	4.69	4.85	4.60	4.70	4.86	5.02
	Amps	13.2	13.6	14.0	14.6	14.3	14.7	15.2	15.8	15.6	16.0	16.5	17.2	16.7	17.1	17.7	18.4	17.8	18.3	18.9	19.6	18.9	19.4	20.0	20.8
1800	MBh	55.6	56.9	60.7	64.9	54.3	55.5	59.3	63.4	53.0	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.2	53.7	57.4	45.5	46.5	49.7	53.2
	S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.94	0.77	0.57
	DT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	16
	kW	3.52	3.59	3.70	3.82	3.79	3.87	3.99	4.12	4.03	4.11	4.25	4.39	4.24	4.33	4.47	4.62	4.42	4.51	4.66	4.82	4.57	4.67	4.83	4.99
	Amps	13.2	13.5	13.9	14.5	14.2	14.6	15.1	15.7	15.5	15.9	16.4	17.1	16.6	17.0	17.6	18.3	17.7	18.1	18.8	19.5	18.8	19.2	19.9	20.7
1600	MBh	52.9	54.0	57.7	61.7	51.6	52.8	56.4	60.2	50.4	51.5	55.0	58.8	49.2	50.2	53.7	57.4	46.7	47.7	51.0	54.5	43.3	44.2	47.2	50.5
	S/T	0.84	0.79	0.64	0.48	0.87	0.82	0.66	0.50	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.90	0.73	0.54	0.96	0.90	0.73	0.55
	DT	25	24	21	17	26	25	21	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16
	kW	3.46	3.53	3.65	3.76	3.73	3.81	3.93	4.06	3.96	4.05	4.18	4.31	4.17	4.26	4.40	4.54	4.34	4.44	4.58	4.74	4.49	4.59	4.75	4.91
	Amps	12.9	13.2	13.7	14.2	14.0	14.3	14.8	15.4	15.2	15.6	16.1	16.7	16.3	16.7	17.3	17.9	17.4	17.8	18.4	19.1	18.4	18.9	19.5	20.3
85	MBh	57.5	58.6	61.3	65.4	56.1	57.2	59.9	63.9	54.8	55.8	58.5	62.4	53.4	54.5	57.1	60.9	50.8	51.8	54.2	57.8	47.0	47.9	50.2	53.6
	S/T	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78
	DT	25	25	24	20	26	25	24	21	25	25	24	21	25	25	24	21	23	24	24	21	22	22	22	19
	kW	3.56	3.64	3.76	3.88	3.84	3.92	4.05	4.18	4.08	4.17	4.31	4.45	4.30	4.39	4.54	4.69	4.48	4.58	4.73	4.89	4.63	4.74	4.90	5.06
	Amps	13.4	13.7	14.2	14.7	14.5	14.8	15.3	15.9	15.8	16.2	16.7	17.3	16.9	17.3	17.9	18.6	18.0	18.4	19.1	19.8	19.1	19.6	20.2	21.0

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TV) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. fan)

HEATING DATA

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	44.5	42.2	39.7	37.1	35.4	34.3	31.9	29.4	27.5	25.4	23.4	22.0	21.2	19.1	16.9	14.7	12.6	10.3
ΔT	33.0	31.2	29.4	27.5	26.2	25.4	23.6	21.8	20.4	18.8	17.3	16.3	15.7	14.1	12.5	10.9	9.3	7.6
kW	2.81	2.75	2.69	2.63	2.6	2.57	2.52	2.46	2.43	2.37	2.32	2.28	2.26	2.20	2.14	2.08	2.02	1.97
Amps	12.8	11.8	11.1	10.4	10.0	9.8	9.2	8.7	8.3	8.0	7.6	7.4	7.3	6.9	6.4	6.0	5.5	4.9
COP	4.64	4.49	4.32	4.12	3.99	3.90	3.71	3.50	3.30	3.13	2.95	2.83	2.75	2.54	2.31	2.07	1.82	1.53
EER	15.9	15.3	14.8	14.1	13.6	13.3	12.7	12.0	11.3	10.7	10.1	9.7	9.4	8.7	7.9	7.1	6.2	5.2

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.8	29.2	27.4	25.6	24.5	23.7	22.0	20.3	18.0	16.6	15.3	14.5	13.9	12.5	11.1	9.7	8.3	6.8
ΔT	33.5	31.8	29.9	27.9	26.7	25.9	24.0	22.1	19.6	18.1	16.7	15.8	15.2	13.6	12.1	10.5	9.0	7.4
kW	1.98	1.94	1.90	1.86	1.8	1.81	1.77	1.73	1.78	1.74	1.69	1.67	1.65	1.60	1.56	1.51	1.47	1.42
Amps	9.5	8.8	8.2	7.7	7.5	7.3	6.9	6.5	6.2	6.0	5.7	5.5	5.5	5.2	4.8	4.5	4.2	3.7
COP	4.54	4.39	4.23	4.04	3.91	3.83	3.64	3.44	2.96	2.81	2.65	2.54	2.48	2.28	2.08	1.87	1.64	1.39
EER	15.5	15.0	14.4	13.8	13.4	13.1	12.4	11.7	10.1	9.6	9.1	8.7	8.5	7.8	7.1	6.4	5.6	4.7

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	62.2	58.9	55.4	51.8	49.5	48.0	44.6	41.1	38.9	35.9	33.0	31.2	30.0	27.0	23.9	20.8	17.8	14.6
ΔT	32.9	31.2	29.3	27.4	26.2	25.4	23.6	21.7	20.6	19.0	17.5	16.5	15.9	14.3	12.6	11.0	9.4	7.7
kW	3.80	3.72	3.64	3.56	3.5	3.49	3.41	3.33	3.28	3.20	3.12	3.07	3.04	2.96	2.89	2.81	2.73	2.66
Amps	17.0	15.7	14.7	13.8	13.2	13.0	12.2	11.5	11.0	10.5	10.0	9.7	9.6	9.1	8.4	7.9	7.2	6.4
COP	4.80	4.64	4.46	4.26	4.12	4.03	3.82	3.61	3.47	3.29	3.10	2.97	2.89	2.66	2.42	2.17	1.90	1.61
EER	16.4	15.8	15.2	14.5	14.1	13.8	13.1	12.3	11.9	11.2	10.6	10.2	9.9	9.1	8.3	7.4	6.5	5.5

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	43.8	41.4	39.0	36.5	34.8	33.7	31.3	28.9	27.0	25.0	23.0	21.7	20.9	18.7	16.6	14.5	12.4	10.1
ΔT	33.8	32.0	30.1	28.1	26.9	26.0	24.2	22.3	20.9	19.3	17.7	16.7	16.1	14.5	12.8	11.2	9.5	7.8
kW	2.67	2.62	2.56	2.50	2.5	2.44	2.39	2.33	2.44	2.38	2.32	2.28	2.26	2.19	2.13	2.07	2.01	1.95
Amps	12.7	11.7	10.9	10.2	9.8	9.6	9.0	8.5	8.1	7.7	7.2	7.0	6.9	6.5	6.0	5.6	5.1	4.5
COP	4.79	4.63	4.46	4.27	4.13	4.04	3.84	3.63	3.24	3.07	2.90	2.78	2.71	2.50	2.28	2.05	1.80	1.52
EER	16.4	15.8	15.2	14.6	14.1	13.8	13.1	12.4	11.1	10.5	9.9	9.5	9.3	8.5	7.8	7.0	6.2	5.2

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power



## HEATING DATA (CONT.)

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	71.0	67.2	63.3	59.2	56.5	54.7	50.9	46.9	43.6	40.3	37.1	35.0	33.7	30.2	26.8	23.4	20.0	16.3
ΔT	36.5	34.6	32.6	30.4	29.1	28.2	26.2	24.1	22.4	20.7	19.1	18.0	17.3	15.6	13.8	12.0	10.3	8.4
kW	4.57	4.48	4.39	4.30	4.2	4.21	4.12	4.03	4.52	4.41	4.31	4.24	4.20	4.09	3.99	3.88	3.77	3.67
Amps	21.4	19.8	18.5	17.3	16.7	16.4	15.4	14.6	14.0	13.3	12.6	12.3	12.2	11.5	10.7	10.1	9.3	8.3
COP	4.55	4.39	4.22	4.03	3.90	3.81	3.61	3.41	2.82	2.67	2.52	2.41	2.35	2.16	1.97	1.76	1.55	1.30
EER	15.5	15.0	14.4	13.8	13.3	13.0	12.3	11.6	9.6	9.1	8.6	8.2	8.0	7.4	6.7	6.0	5.3	4.5

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	49.8	47.1	44.4	41.5	39.6	38.4	35.6	32.9	29.8	27.5	25.3	23.9	23.0	20.7	18.3	16.0	13.6	11.2
ΔT	38.4	36.4	34.2	32.0	30.6	29.6	27.5	25.4	23.0	21.2	19.5	18.5	17.8	15.9	14.1	12.3	10.5	8.6
kW	3.41	3.33	3.26	3.19	3.1	3.12	3.05	2.97	3.37	3.28	3.20	3.15	3.11	3.03	2.94	2.86	2.77	2.69
Amps	16.8	15.6	14.6	13.7	13.2	12.9	12.2	11.6	11.1	10.6	10.1	9.8	9.7	9.2	8.6	8.0	7.4	6.7
COP	4.28	4.14	3.98	3.81	3.68	3.60	3.42	3.24	2.59	2.45	2.32	2.22	2.17	2.00	1.82	1.64	1.44	1.22
EER	14.6	14.1	13.6	13.0	12.6	12.3	11.7	11.1	8.8	8.4	7.9	7.6	7.4	6.8	6.2	5.6	4.9	4.2

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS <sup>3</sup>			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI	HSPF <sup>4</sup>	LOW		
	AVPTC42D14A*		35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,200	5933262
	AVPTC48D14A*		36,000	27,400	17.50	12.50	25,400	20,600	35,000	9.25	20,400	1,200	5933263
	CA*F3743*6D*+MBVC1600**1A*+TXV		35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.50	20,400	1,250	4415195
	CA*F3743*6D*+MBVC2000**1A*+TXV		35,000	26,600	18.00	13.00	24,600	20,000	34,800	9.25	20,400	1,250	4415237
	CA*F3743*6D*+TXV	G*VC80604B*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,260	5038606
	CA*F3743*6D*+TXV	G*VC80805C*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038668
	CA*F3743*6D*+TXV	A*VC80604B*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,260	5038728
	CA*F3743*6D*+TXV	A*VC80603B*B*	34,600	26,200	17.40	12.50	24,400	19,700	34,800	9.30	20,000	1,170	5038755
	CA*F3743*6D*+TXV	A*VC80805C*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038773
	CA*F3743*6D*+TXV	ADV80805C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,250	5038802
	CA*F3743*6D*+TXV	G*VC950453BXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623080
	CA*F3743*6D*+TXV	G*VC950704CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623085
	CA*F3743*6D*+TXV	A*VC950714CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623092
	CA*F3743*6D*+TXV	G*VC950714CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623093
	CA*F3743*6D*+TXV	G*VC950905CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,200	5623096
	CA*F3743*6D*+TXV	G*VC950905DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,200	5623102
	CA*F3743*6D*+TXV	A*VC950915DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,400	1,200	5623108
	CA*F3743*6D*+TXV	G*VC950915DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,400	1,200	5623109
	CA*F3743*6D*+TXV	G*VC951155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,200	5623112
	CA*F3743*6D*+TXV	G*VM960603BXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623118
	CA*F3743*6D*+TXV	A*VM960604CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623121
	CA*F3743*6D*+TXV	G*VM960604CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623122
	CA*F3743*6D*+TXV	G*VM960805CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,200	5623131
	CA*F3743*6D*+TXV	G*VM960805DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,400	1,200	5623135
	CA*F3743*6D*+TXV	G*VM961005DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,200	5623139
	CA*F3743*6D*+TXV	G*VM961155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,200	5623143
	CA*F3743*6D*+TXV	A*VC81005C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498129
	CA*F3743*6D*+TXV	A*VC950453BXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498130
	CA*F3743*6D*+TXV	A*VC950704CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498131
	CA*F3743*6D*+TXV	A*VC950905CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,200	6498132
	CA*F3743*6D*+TXV	A*VC950905DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,200	6498133
	CA*F3743*6D*+TXV	A*VC951155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,200	6498134
	CA*F3743*6D*+TXV	A*VM960603BXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498135
	CA*F3743*6D*+TXV	A*VM960805CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,200	6498136
	CA*F3743*6D*+TXV	A*VM960805DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,400	1,200	6498137

DSZC18  
0361A\*

See Notes on Page 24.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS <sup>3</sup>			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI	HSPF <sup>4</sup>	LOW		
DSZC18 0361A* (cont.)	CA *F3743*6D*+TXV	A*VM961005DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,200	6498138
	CA *F3743*6D*+TXV	A*VM961155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,200	6498139
	CA *F3743*6D*+TXV	ADV81005C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,230	6498140
	CA *F3743*6D*+TXV	G*VC81005C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498141
	CA *F4860*6D*+TXV	G*VC80805C*B*	35,000	26,600	17.50	12.50	24,600	20,000	34,800	9.30	20,000	1,250	5038698
	CA *F4860*6D*+TXV	ADV80805C*B*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.30	20,000	1,250	5038785
	CA *F4860*6D*+TXV	A*VC80805C*B*	35,000	26,600	17.50	12.50	24,600	20,000	34,800	9.30	20,000	1,250	5038794
	CA *F4961*6D*+MBVC1600**1A*+TXV		35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.50	20,000	1,250	4431891
	CA *F4961*6D*+MBVC2000**1A*+TXV		35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,250	4431892
	CA *F4961*6D*+TXV	G*VC80805C*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038607
	CA *F4961*6D*+TXV	G*VC80604B*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,260	5038699
	CA *F4961*6D*+TXV	A*VC80805C*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038729
	CA *F4961*6D*+TXV	ADV80805C*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038730
	CA *F4961*6D*+TXV	A*VC80604B*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,260	5038795
	CA *F4961*6D*+TXV	G*VC950453BxB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623081
	CA *F4961*6D*+TXV	G*VC950704CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623086
	CA *F4961*6D*+TXV	A*VC950714CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623094
	CA *F4961*6D*+TXV	G*VC950714CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623095
	CA *F4961*6D*+TXV	G*VC950905CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,250	5623097
	CA *F4961*6D*+TXV	G*VC950905DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623103
CA *F4961*6D*+TXV	A*VC950915DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,000	1,250	5623110	
CA *F4961*6D*+TXV	G*VC950915DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,000	1,250	5623111	
CA *F4961*6D*+TXV	G*VC951155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623113	
CA *F4961*6D*+TXV	G*VM960603BxB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623119	
CA *F4961*6D*+TXV	A*VM960604CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623123	
CA *F4961*6D*+TXV	G*VM960604CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623124	
CA *F4961*6D*+TXV	G*VM960805CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,250	5623132	
CA *F4961*6D*+TXV	G*VM960805DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,000	1,250	5623136	
CA *F4961*6D*+TXV	G*VM961005DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623140	
CA *F4961*6D*+TXV	G*VM961155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623144	
CA *F4961*6D*+TXV	A*VC81005C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498142	
CA *F4961*6D*+TXV	A*VC950453BxB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498143	
CA *F4961*6D*+TXV	A*VC950704CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498144	
CA *F4961*6D*+TXV	A*VC950905CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,250	6498145	
CA *F4961*6D*+TXV	A*VC950905DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498146	

See Notes on Page 24.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS <sup>3</sup>			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI	HSPF <sup>4</sup>	LOW		
DSZC18 0361A* (cont.)	CA *F4961*6D*+TXV	A*VC951155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498147
	CA *F4961*6D*+TXV	A*VM960603BxB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498148
	CA *F4961*6D*+TXV	A*VM960805CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,250	6498149
	CA *F4961*6D*+TXV	A*VM960805DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,000	1,250	6498150
	CA *F4961*6D*+TXV	A*VM961005DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498151
	CA *F4961*6D*+TXV	A*VM961155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498152
	CA *F4961*6D*+TXV	ADV81005C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,230	6498153
	CA *F4961*6D*+TXV	G*VC81005C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498154
	CHPF3743C6B*+MBVC1600*-1A*+TXV		35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.50	20,400	1,250	3654787
	CHPF3743C6B*+TXV	G*VC80805C*B*	34,600	26,200	17.00	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038683
	CHPF3743C6B*+TXV	G*VC80604B*B*	34,600	26,200	17.00	12.50	24,400	19,700	34,800	9.30	20,000	1,260	5038711
	CHPF3743C6B*+TXV	A*VC80805C*B*	34,600	26,200	17.00	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038786
	CHPF3743C6B*+TXV	A*VC80604B*B*	34,600	26,200	17.00	12.50	24,400	19,700	34,800	9.30	20,000	1,260	5038803
	CHPF3743C6B*+TXV	G*VC950453BxB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623082
	CHPF3743C6B*+TXV	G*VC950704CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623087
	CHPF3743C6B*+TXV	G*VM960603BxB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623120
	CHPF3743C6B*+TXV	A*VM960604CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623125
	CHPF3743C6B*+TXV	G*VM960604CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623126
	CHPF3743C6B*+TXV	A*VC81005C*B*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498155
	CHPF3743C6B*+TXV	A*VC950453BxB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498156
CHPF3743C6B*+TXV	A*VC950704CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498157	
CHPF3743C6B*+TXV	A*VM960603BxB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498158	
CHPF3743C6B*+TXV	G*VC81005C*B*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498159	
CHPF3743D6B*+TXV		35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	3654803	
CHPF3743D6B*+TXV	G*VC80805C*B*	34,600	26,200	17.00	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038628	
CHPF3743D6B*+TXV	A*VC80805C*B*	34,600	26,200	17.00	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038746	
CHPF3743D6B*+TXV	G*VC950704CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623088	
CHPF3743D6B*+TXV	G*VC950905CXB*	35,000	26,600	17.00	12.50	24,600	20,000	35,000	9.25	20,400	1,250	5623098	
CHPF3743D6B*+TXV	G*VC950905DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,250	5623104	
CHPF3743D6B*+TXV	G*VC951155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623114	
CHPF3743D6B*+TXV	A*VM960604CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623127	
CHPF3743D6B*+TXV	G*VM960604CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623128	
CHPF3743D6B*+TXV	G*VM960805CXB*	35,000	26,600	17.00	12.50	24,600	20,000	35,000	9.25	20,400	1,250	5623133	
CHPF3743D6B*+TXV	G*VM960805DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,400	1,250	5623137	
CHPF3743D6B*+TXV	G*VM961005DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623141	

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS <sup>3</sup>			HEATING CAPACITY (BTU/H)				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI	HSPF <sup>4</sup>	LOW			
DSZC18 0361A* (cont.)	CHPF3743D6B**TXV	G*VM961155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623145	
	CHPF3743D6B**TXV	A*VC81005C*B*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498160	
	CHPF3743D6B**TXV	A*VC950704CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498161	
	CHPF3743D6B**TXV	A*VC950905CXB*	35,000	26,600	17.00	12.50	24,600	20,000	35,000	9.25	20,400	1,250	6498162	
	CHPF3743D6B**TXV	A*VC950905DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,400	1,250	6498163	
	CHPF3743D6B**TXV	A*VC951155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498164	
	CHPF3743D6B**TXV	A*VM960805CXB*	35,000	26,600	17.00	12.50	24,600	20,000	35,000	9.25	20,400	1,250	6498165	
	CHPF3743D6B**TXV	A*VM960805DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,400	1,250	6498166	
	CHPF3743D6B**TXV	A*VM961005DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498167	
	CHPF3743D6B**TXV	A*VM961155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498168	
	CHPF3743D6B**TXV	G*VC81005C*B*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498169	
	CHPF4860D6D**MBVC2000**-1A**TXV		35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	3654817	
	CHPF4860D6D**TXV	G*VC80805C*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038712	
	CHPF4860D6D**TXV	A*VC80805C*B*	34,600	26,200	17.50	12.50	24,400	19,700	34,800	9.30	20,000	1,250	5038804	
	CHPF4860D6D**TXV	G*VC950704CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623089	
	CHPF4860D6D**TXV	G*VC950905CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,250	5623099	
	CHPF4860D6D**TXV	G*VC950905DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623105	
	CHPF4860D6D**TXV	G*VC951155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623115	
	CHPF4860D6D**TXV	A*VM960604CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623129	
	CHPF4860D6D**TXV	G*VM960604CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	5623130	
	CHPF4860D6D**TXV	G*VM960805CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,250	5623134	
	CHPF4860D6D**TXV	G*VM960805DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,000	1,250	5623138	
	CHPF4860D6D**TXV	G*VM961005DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623142	
	CHPF4860D6D**TXV	G*VM961155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	5623146	
	CHPF4860D6D**TXV	A*VC81005C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498170	
	CHPF4860D6D**TXV	A*VC950704CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,000	1,250	6498171	
	CHPF4860D6D**TXV	A*VC950905CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,250	6498172	
	CHPF4860D6D**TXV	A*VC950905DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498173	
CHPF4860D6D**TXV	A*VC951155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498174		
CHPF4860D6D**TXV	A*VM960805CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,250	6498175		
CHPF4860D6D**TXV	A*VM960805DXB*	35,000	26,600	18.00	12.80	24,600	20,000	35,000	9.25	20,000	1,250	6498176		
CHPF4860D6D**TXV	A*VM961005DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498177		
CHPF4860D6D**TXV	A*VM961155DXB*	35,000	26,600	18.00	13.00	24,600	20,000	35,000	9.25	20,000	1,250	6498178		
CHPF4860D6D**TXV	G*VC81005C*B*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.30	20,000	1,210	6498179		
CSCF3642N6D**TXV	G*VC950453BxB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,400	1,200	5623083		

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS <sup>3</sup>			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI	HSPF <sup>4</sup>	LOW		
DSZC18 0361A* (cont.)	CSCF3642N6D*+TXV	G*VC950704CXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,400	1,225	5623090
	CSCF3642N6D*+TXV	G*VC950905CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,150	5623100
	CSCF3642N6D*+TXV	G*VC950905DXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,150	5623106
	CSCF3642N6D*+TXV	G*VC951155DXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,225	5623116
	CSCF3642N6D*+TXV	A*VC950453BXB*	34,600	26,200	17.50	12.50	24,400	19,700	35,000	9.25	20,400	1,200	6498180
	CSCF3642N6D*+TXV	A*VC950905CXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,150	6498181
	CSCF3642N6D*+TXV	A*VC950905DXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,150	6498182
	CSCF3642N6D*+TXV	A*VC951155DXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,400	1,225	6498183
	CSCF4860N6D*+TXV	G*VC950453BXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,200	5623084
	CSCF4860N6D*+TXV	G*VC950704CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,225	5623091
	CSCF4860N6D*+TXV	G*VC950905CXB*	35,000	26,600	17.00	12.50	24,600	20,000	35,000	9.25	20,000	1,150	5623101
	CSCF4860N6D*+TXV	G*VC950905DXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,150	5623107
	CSCF4860N6D*+TXV	G*VC951155DXB*	35,000	26,600	17.50	13.00	24,600	20,000	35,000	9.25	20,000	1,225	5623117
	CSCF4860N6D*+TXV	A*VC950453BXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,200	6498184
	CSCF4860N6D*+TXV	A*VC950704CXB*	34,600	26,200	17.00	12.50	24,400	19,700	35,000	9.25	20,000	1,225	6498185
	CSCF4860N6D*+TXV	A*VC950905CXB*	35,000	26,600	17.00	12.50	24,600	20,000	35,000	9.25	20,000	1,150	6498186
	CSCF4860N6D*+TXV	A*VC950905DXB*	35,000	26,600	17.50	12.50	24,600	20,000	35,000	9.25	20,000	1,150	6498187
	CSCF4860N6D*+TXV	A*VC951155DXB*	35,000	26,600	17.50	13.00	24,600	20,000	35,000	9.25	20,000	1,225	6498188
	DSZC18 0481A*	AVPTC48D14A*		47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,700
CA*F4961*6D**+MBVC1600*-1A*+TXV			47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	4431904
CA*F4961*6D**+MBVC2000*-1A*+TXV			47,500	35,600	18.00	13.00	33,000	26,400	47,500	9.50	29,600	1,750	4431905
CA*F4961*6D**+TXV		A*VC950915DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937391
CA*F4961*6D**+TXV		G*VC950704CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937392
CA*F4961*6D**+TXV		G*VC950905CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937393
CA*F4961*6D**+TXV		G*VC950905DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937394
CA*F4961*6D**+TXV		G*VC950915DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937395
CA*F4961*6D**+TXV		G*VC951155DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937396
CA*F4961*6D**+TXV		G*VM960805CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937397
CA*F4961*6D**+TXV		G*VM960805DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937398
CA*F4961*6D**+TXV		G*VM961005DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937399
CA*F4961*6D**+TXV		G*VM961155DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000	1,750	5937400
CA*F4961*6D**+TXV		A*VC80805C*B*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.30	29,000	1,590	6498189
CA*F4961*6D**+TXV		A*VC81005C*B*	47,000	35,400	17.00	12.20	32,600	26,200	47,000	9.30	29,000	1,610	6498190
CA*F4961*6D**+TXV		A*VC950905CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	6498191
CA*F4961*6D**+TXV		A*VC950905DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	1,750	6498192
CA*F4961*6D**+TXV		A*VC951155DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000	1,750	6498193

See Notes on Page 24.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			HEATING CAPACITY (BTU/H)			CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.			HI
DSZC18 0481A* (cont.)	CA*F4961*6D**TXV	A*VM960805CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000
	CA*F4961*6D**TXV	A*VM960805DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000
	CA*F4961*6D**TXV	A*VM961005DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000
	CA*F4961*6D**TXV	A*VM961155DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000
	CA*F4961*6D**TXV	ADVC80805C*B*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.30	29,000
	CA*F4961*6D**TXV	ADVC81005C*B*	47,000	35,400	17.00	12.20	32,600	26,200	47,000	9.30	29,000
	CA*F4961*6D**TXV	G*VC80805C*B*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.30	29,000
	CA*F4961*6D**TXV	G*VC81005C*B*	47,000	35,400	17.00	12.20	32,600	26,200	47,000	9.30	29,000
	CHPF4860D6D**+MBVC2000**_1A**+TXV	A*VC80805C*B*	47,500	35,600	18.00	13.00	33,000	26,400	47,500	9.50	29,600
	CHPF4860D6D**+TXV	A*VC80805C*B*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.30	29,000
	CHPF4860D6D**+TXV	A*VC81005C*B*	47,000	35,400	17.00	12.20	32,600	26,200	47,000	9.30	29,000
	CHPF4860D6D**+TXV	G*VC950704CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000
	CHPF4860D6D**+TXV	G*VC950905CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000
	CHPF4860D6D**+TXV	G*VC950905DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000
	CHPF4860D6D**+TXV	G*VC951155DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000
	CHPF4860D6D**+TXV	G*VM960805CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000
	CHPF4860D6D**+TXV	G*VM960805DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000
	CHPF4860D6D**+TXV	G*VM961005DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000
	CHPF4860D6D**+TXV	G*VM961155DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000
	CHPF4860D6D**+TXV	A*VC950905CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000
CHPF4860D6D**+TXV	A*VC950905DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	
CHPF4860D6D**+TXV	A*VC951155DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	
CHPF4860D6D**+TXV	A*VM960805CXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	
CHPF4860D6D**+TXV	A*VM960805DXB*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.25	29,000	
CHPF4860D6D**+TXV	A*VM961155DXB*	47,000	35,400	17.75	12.50	32,600	26,200	47,000	9.25	29,000	
CHPF4860D6D**+TXV	G*VC80805C*B*	47,000	35,400	17.50	12.50	32,600	26,200	47,000	9.30	29,000	
CHPF4860D6D**+TXV	G*VC81005C*B*	47,000	35,400	17.00	12.20	32,600	26,200	47,000	9.30	29,000	
CSCF4860N6D**+TXV	G*VC950704CXB*	47,000	35,400	16.50	12.50	32,600	26,200	47,000	9.25	29,000	
CSCF4860N6D**+TXV	G*VC950905CXB*	47,000	35,400	16.50	12.50	32,600	26,200	47,000	9.25	29,000	
CSCF4860N6D**+TXV	G*VC950905DXB*	47,000	35,400	16.50	12.50	32,600	26,200	47,000	9.25	29,000	
CSCF4860N6D**+TXV	G*VC951155DXB*	47,000	35,400	16.50	12.50	32,600	26,200	47,000	9.25	29,000	
CSCF4860N6D**+TXV	A*VC950704CXB*	47,000	35,400	16.75	12.50	32,600	26,200	47,000	9.25	29,000	
CSCF4860N6D**+TXV	A*VC950905CXB*	47,000	35,400	16.50	12.50	32,600	26,200	47,000	9.25	29,000	
CSCF4860N6D**+TXV	A*VC950905DXB*	47,000	35,400	16.50	12.50	32,600	26,200	47,000	9.25	29,000	
CSCF4860N6D**+TXV	A*VC951155DXB*	47,000	35,400	16.75	12.50	32,600	26,200	47,000	9.25	29,000	

See Notes on Page 24.

OUTDOOR UNIT	INDOOR UNITS		FURNACES	COOLING CAPACITY (BTU/H)			TVA RATINGS <sup>3</sup>			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS			TOTAL	SENS.	SEER <sup>1</sup>	EER <sup>2</sup>	TOTAL	SENS.	HI	HSPF <sup>4</sup>	LOW		
	AVPTC60D14A*			56,000	40,000	16.50	12.00	37,000	28,800	56,000	9.00	34,600	1,800	5933265
	CA*F4961*6D*+MBVC2000**~1A*+TXV			56,500	40,000	17.00	12.60	37,200	29,000	56,500	9.30	35,000	1,800	4514555
	CA*F4961*6D*+TXV		G*VC81005C*B*	55,500	39,500	16.70	12.00	36,600	28,600	56,000	9.30	34,600	1,800	5038644
	CA*F4961*6D*+TXV		G*VC80805C*B*	55,500	39,500	16.70	12.00	36,600	28,600	55,500	9.30	34,400	1,590	5038700
	CA*F4961*6D*+TXV		A*VC81005C*B*	55,500	39,500	16.70	12.00	36,600	28,600	56,000	9.30	34,600	1,800	5038758
	CA*F4961*6D*+TXV		ADV81005C*B*	55,500	39,500	16.50	12.00	36,600	28,600	56,000	9.30	34,600	1,820	5038774
	CA*F4961*6D*+TXV		A*VC80805C*B*	55,500	39,500	16.70	12.00	36,600	28,600	55,500	9.30	34,400	1,590	5038796
	CA*F4961*6D*+TXV		ADV80805C*B*	55,500	39,500	16.50	12.00	36,600	28,600	55,500	9.30	34,400	1,580	5038797
	CA*F4961*6D*+TXV		A*VC950905CXB*	55,000	39,000	16.30	12.00	36,200	28,200	56,500	9.15	35,000	1,600	5937413
	CA*F4961*6D*+TXV		A*VC950905DXB*	55,500	39,500	16.80	12.30	36,600	28,600	56,000	9.25	34,600	1,600	5937414
	CA*F4961*6D*+TXV		A*VC950915DXB*	55,000	39,000	16.60	12.10	36,200	28,200	56,000	9.20	34,800	1,650	5937415
	CA*F4961*6D*+TXV		A*VC951155DXB*	55,500	39,500	16.30	12.20	36,600	28,600	56,000	9.15	34,800	1,600	5937416
	CA*F4961*6D*+TXV		A*VM960805CXB*	55,000	39,000	16.30	12.00	36,200	28,200	56,500	9.15	35,000	1,600	5937417
	CA*F4961*6D*+TXV		A*VM960805DXB*	55,000	39,000	16.60	12.10	36,200	28,200	56,000	9.20	34,800	1,650	5937418
	CA*F4961*6D*+TXV		A*VM961005DXB*	55,500	39,500	16.30	12.20	36,600	28,600	56,000	9.15	34,800	1,600	5937419
DSZC18	CA*F4961*6D*+TXV		A*VM961155DXB*	55,500	39,500	16.30	12.20	36,600	28,600	56,000	9.15	34,800	1,600	5937420
0601B*	CA*F4961*6D*+TXV		G*VC950915DXB*	55,000	39,000	16.60	12.10	36,200	28,200	56,000	9.20	34,800	1,650	5937421
	CHPF4860D6D*+MBVC2000**~1A*+TXV			55,500	39,500	17.00	12.80	36,600	28,600	55,500	9.30	34,000	1,600	4236556
	CHPF4860D6D*+TXV		G*VC81005C*B*	55,000	39,000	16.90	12.00	36,200	28,200	56,000	9.30	34,400	1,800	5038608
	CHPF4860D6D*+TXV		G*VC80805C*B*	55,500	39,500	16.50	12.00	36,600	28,600	55,500	9.30	34,200	1,590	5038713
	CHPF4860D6D*+TXV		A*VC81005C*B*	55,000	39,000	16.90	12.00	36,200	28,200	56,000	9.30	34,400	1,800	5038731
	CHPF4860D6D*+TXV		A*VC80805C*B*	55,500	39,500	16.50	12.00	36,600	28,600	55,500	9.30	34,200	1,590	5038806
	CHPF4860D6D*+TXV		A*VC950905CXB*	55,000	39,000	16.40	12.00	36,200	28,200	56,000	9.15	34,800	1,600	5937422
	CHPF4860D6D*+TXV		A*VC950905DXB*	55,000	39,000	16.80	12.20	36,200	28,200	56,000	9.25	34,600	1,600	5937423
	CHPF4860D6D*+TXV		A*VC951155DXB*	55,000	39,000	16.40	12.10	36,200	28,200	56,000	9.15	34,600	1,600	5937424
	CHPF4860D6D*+TXV		A*VM960805CXB*	55,000	39,000	16.40	12.00	36,200	28,200	56,000	9.15	34,800	1,600	5937425
	CHPF4860D6D*+TXV		A*VM960805DXB*	55,000	39,000	16.80	12.20	36,200	28,200	56,000	9.25	34,600	1,650	5937426
	CHPF4860D6D*+TXV		A*VM961005DXB*	55,000	39,000	16.40	12.10	36,200	28,200	56,000	9.15	34,600	1,600	5937427
	CHPF4860D6D*+TXV		A*VM961155DXB*	55,000	39,000	16.40	12.10	36,200	28,200	56,000	9.15	34,600	1,600	5937428
	CSCF4860N6D*+TXV		A*VC950905CXB*	55,000	39,000	16.00	12.20	36,200	28,200	56,500	9.00	36,400	1,675	5937429
	CSCF4860N6D*+TXV		A*VC950905DXB*	55,500	39,500	16.50	12.40	36,600	28,600	56,500	9.15	36,400	1,675	5937430
	CSCF4860N6D*+TXV		A*VC951155DXB*	55,500	39,500	16.00	12.30	36,600	28,600	56,500	9.00	36,400	1,850	5937431

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>3</sup> TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F


<sup>4</sup> HSPF = Heating Seasonal Performance Factor

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Franklin Gas Furnace contains the EEP cooling time delay




**DIMENSIONS**

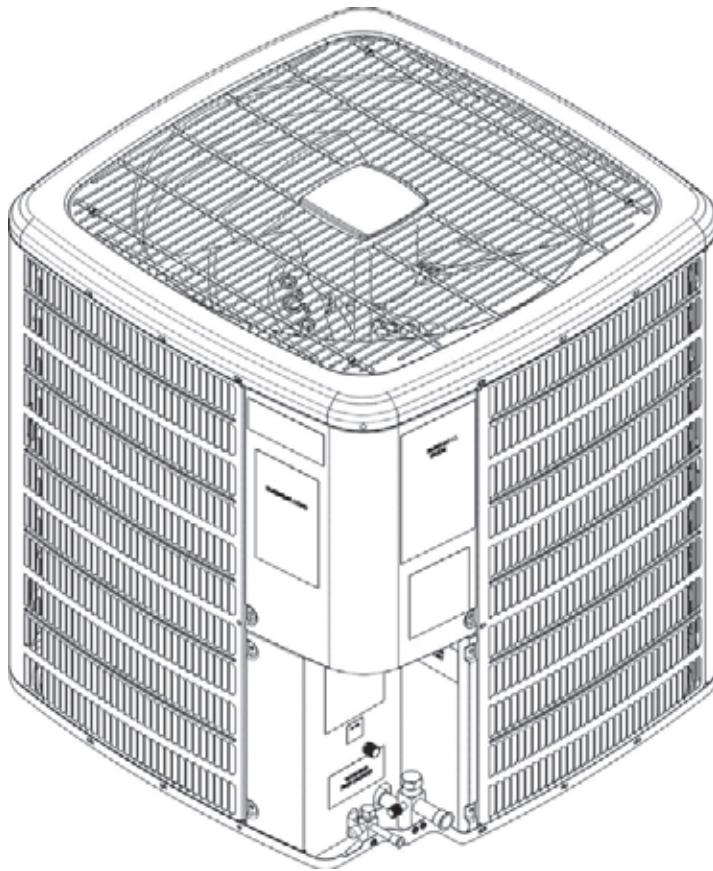

MODEL	DIMENSIONS		
	W"	D"	H"
DSZC180361A	35½	35½	38¼
DSZC180481A	35½	35½	38¼
DSZC180601B	35½	35½	38¼

WIRING DIAGRAM

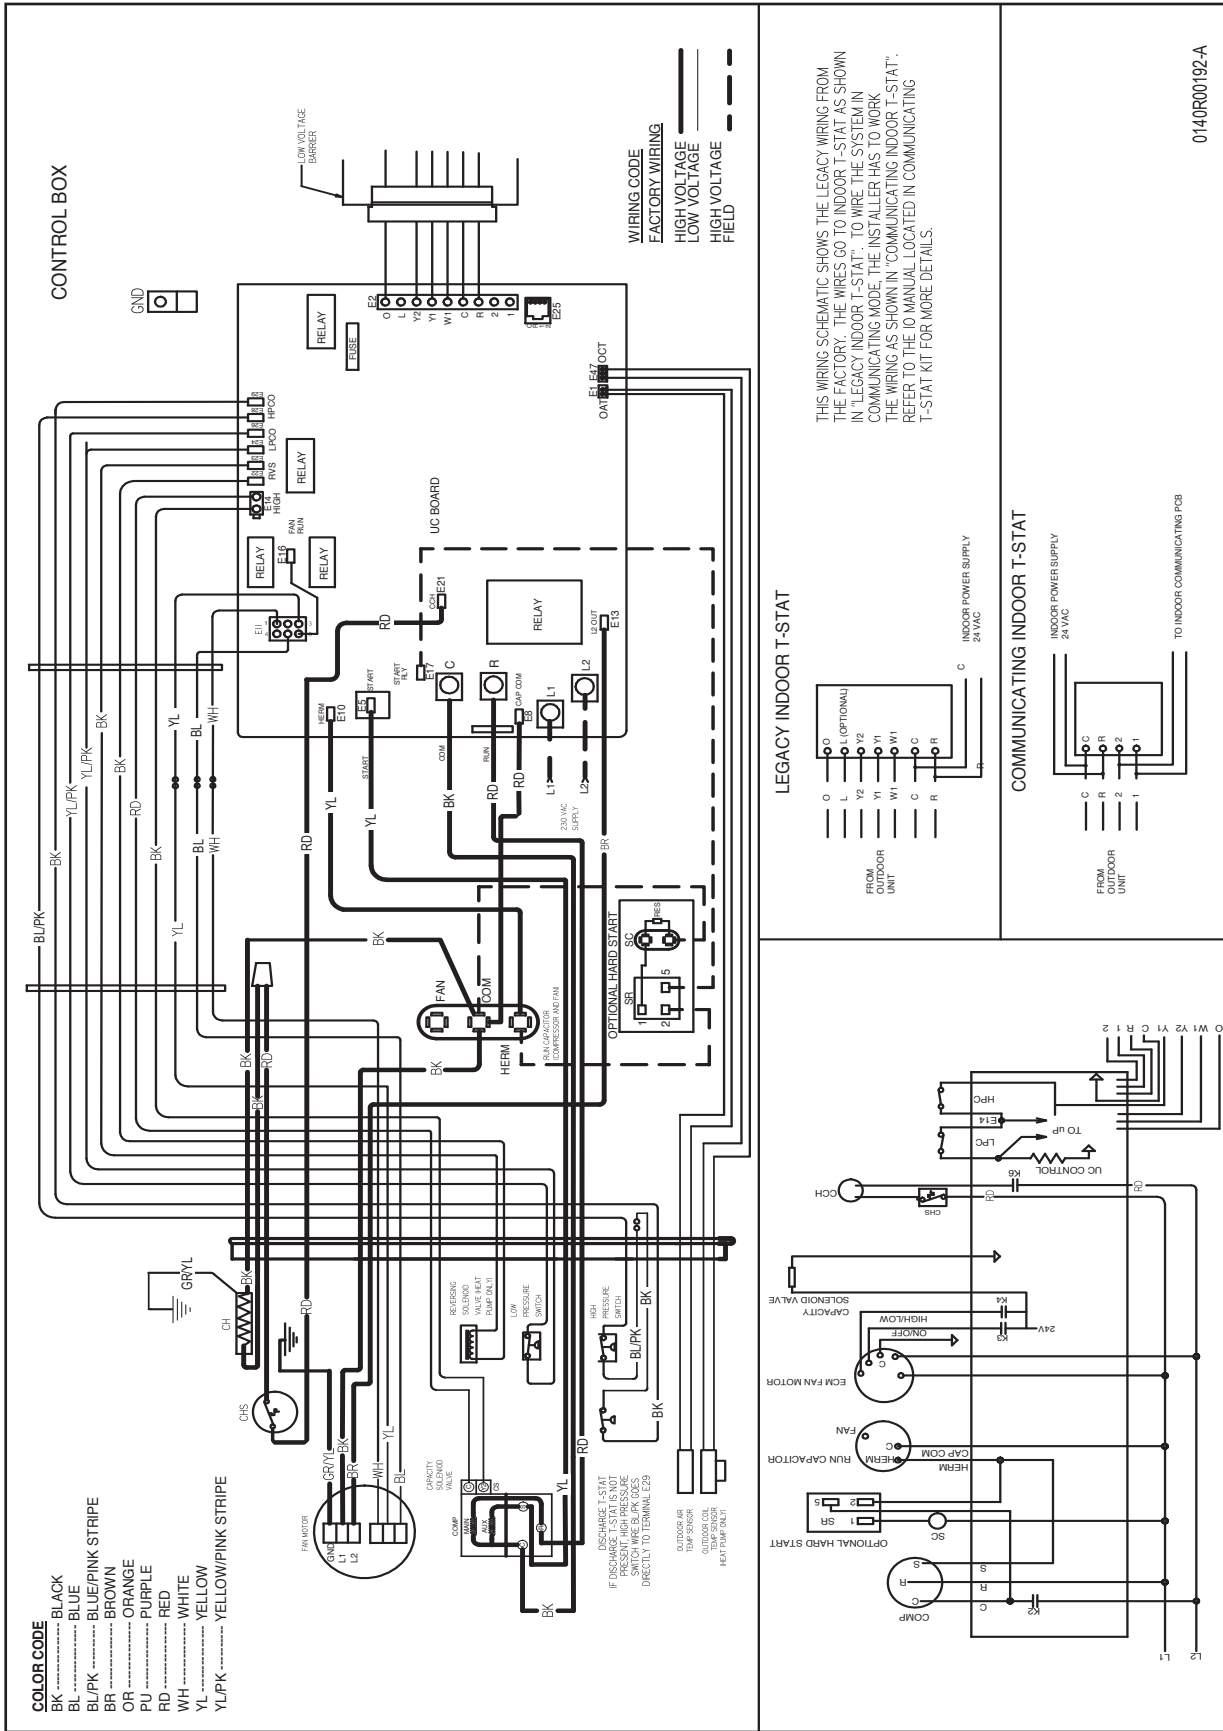

THIS WIRING SCHEMATIC SHOWS THE LEGACY WIRING FROM THE FACTORY. THE WIRES GO TO INDOOR T-STAT AS SHOWN IN "LEGACY INDOOR T-STAT". TO WIRE THE SYSTEM IN COMMUNICATING MODE, THE INSTALLER HAS TO WORK THE WIRING AS SHOWN IN "COMMUNICATING INDOOR T-STAT". REFER TO THE MANUAL LOCATED IN COMMUNICATING T-STAT KIT FOR MORE DETAILS.

**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

## ACCESSORIES

MODEL	DESCRIPTION	DSZC18 036**	DSZC18 048**	DSZC18 060**
ABK-20	Anchor Bracket Kit*			
B1141643 <sup>1</sup>	24V Transformer	X	X	X
CSR-U-1	Hard-start Kit	X	X	
CSR-U-2	Hard-start Kit			
CSR-U-3	Hard-start Kit			X
FSK01A <sup>2</sup>	Freeze Protection Kit	X	X	X
OT18-60A <sup>3</sup>	Outdoor Thermostat/Lockout Thermostat	X	X	X
TX2N4	TXV Kit			
TX2N4A	TXV Kit			
TX3N4	TXV Kit	X		
TX5N4	TXV Kit		X	X

\* Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Available in 24V legacy mode only. This feature is integrated in the communicating mode.

<sup>2</sup> Installed on indoor coil

<sup>3</sup> Available in 24V legacy mode only. This feature is integrated in the communicating mode. Required for heat pump applications where ambient temperature falls below 0 °F with 50% or higher relative humidity.

Note: Maximum number of installed accessories at the same time is limited by the size of the unit's control box.

**NOTES**