



Air Conditioning & Heating

PRODUCT SPECIFICATIONS



UP TO 16 SEER

R-410A

COOLING CAPACITY: 24,000 - 57,000 BTU/H

HEATING CAPACITY: 24,000 - 57,000 BTU/H



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home), 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

DSZC16

SPLIT SYSTEM HEAT PUMP

The Goodman® brand DSZC16 Heat Pump uses the chlorine-free refrigerant R-410A and is part of our new ComfortNet™ family of communicating units. In addition, the DSZC16 features energy efficiencies and operating sound levels that are among the best in the heating and cooling industry. This unit contains the two-stage, high-efficiency Copeland® scroll compressor, which provides improved temperature and humidity control for the consumer who desires superb comfort and quiet operation.

Standard Features

- R-410A chlorine-free refrigerant
- Two-Stage Copeland® UltraTech scroll compressor
- High-density foam compressor sound blanket
- ComfortNet™ Communications System compatible
- Expanded ComfortAlert diagnostics built in
- Set-up capable with two low-voltage wires to outdoor unit
- Diagnostic indicator lights and storage of six fault codes
- Color-coded terminal strip for non-communicating set-up
- High- and low-pressure switches
- Fully charged for 15' of tubing length
- Factory-installed filter dryer
- Coil and ambient temperature sensors
- Two-speed super quiet condenser fan motor
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

Cabinet Features

- Wire fan discharge grille
- Steel louver coil guard
- Baked-on powder paint finish
- Rust-resistant coated screws
- Compact footprint
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	4
Expanded Heating Data	20
AHRI Performance Ratings	22
Wiring Diagram	27
Dimensions	28
Accessories	28



NOMENCLATURE

	D	S	Z	C	16	036	1	A	A	
	1	2	3	4	5,6	7,8,9	10	11	12	
Brand	D Goodman® Brand									Engineering * Minor Revision
Product Category	S Split System									Engineering * Major Revision
Unit Type	X Condenser R-410A Z Heat Pump R-410A									Electrical
Communication Feature	C ComfortNet 4-wire communications ready							1 208/230 V, 1 Phase, 60 Hz 2 220/240 V, 1 Phase, 50 Hz 3 208/230 V, 3 Phase, 60 Hz 4 460 V, 3 Phase, 60 Hz 5 380/415 V, 3 Phase, 50 Hz		
Efficiency	13 13 SEER 14 14 SEER	16 16 SEER 18 18 SEER								Nominal Capacity
								036 3 Tons 042 3½ Tons 048 4 Tons	060 5 Tons 090 7½ tons 120 10 Tons	

* Neither used for order entry or inventory management.

Important EnergyStar Notice: EnergyStar ratings are dependent upon conditions beyond equipment installation. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit www.energystar.gov.

SPECIFICATIONS

	DSZC16 0241A	DSZC16 0361A	DSZC16 0481A	DSZC16 0601A
CAPACITIES AND RATINGS				
Nominal Cooling (BTU/h)	24,000	36,000	48,000	60,000
Nominal Heating (BTU/h)	24,000	36,000	48,000	60,000
Decibels	72	73	74	75
COMPRESSOR				
RLA	10.3	16.7	21.2	25.6
LRA	52	82.0	96.0	118.0
CONDENSER FAN MOTOR				
Horsepower	1/6	1/6	1/6	1/6
FLA	1	1	1	1
REFRIGERATION SYSTEM				
Refrigerant Line Size ¹				
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	7/8"	1 1/8"	1 1/8"
Refrigerant Connection Size				
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	153	203	263	273
Shipped with Orifice Size	NA	NA	NA	NA
ELECTRICAL DATA				
Volts-Hz-Phase	208/230-60-1			
Minimum Circuit Ampacity ²	13.9	21.9	27.5	33
Max. Overcurrent Protection ³	20	30	45	50
Min / Max Volts	197/253	197/253	197/253	197/253
Power Supply Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
SHIP WEIGHT (LBS)	282	282	282	296

¹ Tested and rated in accordance with AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — DSZC160241A* / CA*F3636*6** + TXV / MBVC1600** -1 LOW STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	17.7	18.3	20.1	-	17.3	17.9	19.6	-	16.9	17.5	19.2	-	16.5	17.1	18.7	-	15.6	16.2	17.8	-	14.5	15.0	16.5	-
	S/T	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.84	0.70	0.48	-	0.86	0.72	0.50	-	0.90	0.75	0.52	-	0.90	0.76	0.52	-
	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-
	kW	1.06	1.09	1.12	-	1.15	1.17	1.21	-	1.22	1.25	1.29	-	1.29	1.32	1.36	-	1.34	1.37	1.42	-	1.39	1.42	1.47	-
	Amps	4.2	4.3	4.4	-	4.5	4.6	4.8	-	4.9	5.0	5.2	-	5.2	5.3	5.5	-	5.6	5.7	5.9	-	5.9	6.0	6.2	-
	HiPR	209	225	237	-	235	252	266	-	267	287	303	-	304	327	345	-	342	368	388	-	378	406	429	-
	Lo PR	113	121	132	-	120	127	139	-	124	132	144	-	131	139	152	-	137	146	159	-	142	151	164	-
	MBh	17.2	17.8	19.5	-	16.8	17.4	19.1	-	16.4	17.0	18.6	-	16.0	16.6	18.2	-	15.2	15.7	17.2	-	14.1	14.6	16.0	-
	S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.86	0.71	0.50	-	0.86	0.72	0.50	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	15	12	-
	kW	1.06	1.08	1.11	-	1.14	1.16	1.20	-	1.21	1.24	1.28	-	1.28	1.31	1.35	-	1.33	1.36	1.41	-	1.38	1.41	1.46	-
	Amps	4.1	4.2	4.4	-	4.5	4.6	4.7	-	4.8	5.0	5.1	-	5.2	5.3	5.5	-	5.5	5.6	5.8	-	5.8	6.0	6.2	-
HiPR	207	223	235	-	232	250	264	-	264	284	300	-	301	324	342	-	338	364	384	-	374	402	425	-	
Lo PR	112	119	130	-	118	126	138	-	123	131	143	-	129	138	150	-	136	144	157	-	140	149	163	-	
MBh	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.6	16.1	17.7	-	15.2	15.7	17.2	-	14.4	15.0	16.4	-	13.4	13.9	15.2	-	
S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.83	0.69	0.48	-	
ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-	
kW	1.04	1.06	1.10	-	1.12	1.14	1.18	-	1.19	1.22	1.26	-	1.26	1.28	1.33	-	1.31	1.34	1.38	-	1.36	1.39	1.43	-	
Amps	4.1	4.2	4.3	-	4.4	4.5	4.6	-	4.8	4.9	5.0	-	5.1	5.2	5.4	-	5.4	5.5	5.7	-	5.7	5.9	6.1	-	
HiPR	203	218	230	-	228	245	259	-	259	278	294	-	295	317	335	-	332	357	377	-	366	394	416	-	
Lo PR	110	117	128	-	116	124	135	-	121	128	140	-	127	135	147	-	133	141	154	-	137	146	160	-	

731	MBh	18.0	18.5	20.1	21.5	17.6	18.1	19.6	21.0	17.2	17.7	19.1	20.5	16.7	17.2	18.7	20.0	15.9	16.4	17.7	19.0	14.7	15.2	16.4	17.6
	S/T	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.67	0.43	1.00	0.91	0.69	0.44	1.00	0.92	0.70	0.45
	ΔT	20	19	15	11	21	19	15	11	21	19	15	11	21	19	16	11	20	19	15	11	19	18	14	10
	kW	1.07	1.10	1.13	1.17	1.16	1.18	1.22	1.26	1.23	1.26	1.30	1.35	1.30	1.33	1.37	1.42	1.36	1.39	1.43	1.48	1.40	1.44	1.48	1.54
	Amps	4.2	4.3	4.5	4.6	4.6	4.7	4.8	5.0	4.9	5.1	5.2	5.4	5.3	5.4	5.6	5.8	5.6	5.7	5.9	6.2	5.9	6.1	6.3	6.5
	HiPR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	349	364	345	372	392	409	381	410	433	452
	Lo PR	114	122	133	142	121	129	140	150	126	134	146	155	132	140	153	163	138	147	161	171	143	152	166	177
	MBh	17.5	18.0	19.5	20.9	17.1	17.6	19.0	20.4	16.7	17.2	18.6	19.9	16.3	16.7	18.1	19.4	15.4	15.9	17.2	18.5	14.3	14.7	15.9	17.1
	S/T	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.61	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43
	ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15	11
	kW	1.06	1.09	1.12	1.16	1.15	1.17	1.21	1.25	1.22	1.25	1.29	1.34	1.29	1.32	1.36	1.41	1.34	1.37	1.42	1.47	1.39	1.42	1.47	1.52
	Amps	4.2	4.3	4.4	4.6	4.5	4.6	4.8	4.9	4.9	5.0	5.2	5.4	5.2	5.3	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.0	6.2	6.5
HiPR	209	225	238	248	235	252	267	278	267	287	303	316	304	327	345	360	342	368	388	405	378	406	429	448	
Lo PR	113	121	132	140	120	127	139	148	124	132	144	154	131	139	152	162	137	146	159	169	142	151	165	175	
MBh	16.6	17.1	18.5	19.9	16.2	16.7	18.1	19.4	15.8	16.3	17.6	18.9	15.4	15.9	17.2	18.5	14.7	15.1	16.3	17.5	13.6	14.0	15.1	16.3	
S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41	
ΔT	22	20	17	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	16	11	21	19	16	11	
kW	1.05	1.07	1.10	1.14	1.13	1.15	1.19	1.23	1.20	1.23	1.27	1.31	1.27	1.29	1.34	1.38	1.32	1.35	1.40	1.44	1.37	1.40	1.45	1.50	
Amps	4.1	4.2	4.3	4.5	4.4	4.5	4.7	4.9	4.8	4.9	5.1	5.3	5.1	5.3	5.4	5.6	5.5	5.6	5.8	6.0	5.8	5.9	6.1	6.3	
HiPR	205	220	233	243	230	247	261	272	261	281	297	310	298	320	338	353	335	360	381	397	370	398	421	439	
Lo PR	111	118	129	137	117	125	136	145	122	130	142	151	128	136	149	158	134	143	156	166	139	148	161	172	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — DSZC160241A* / CA*F3636*6** + TXV / MBVC1600** -1 LOW STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	731	MBh	18.3	18.7	20.0	21.4	17.9	18.3	19.5	20.9	17.5	17.8	19.1	20.4	17.0	17.4	18.6	19.9	16.2	16.5	17.7	18.9	15.0	15.3	16.4	17.5
		S/T	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.64	1.00	1.00	0.86	0.64
	ΔT	23	22	19	15	22	22	19	15	21	22	19	15	21	22	19	15	20	21	19	15	19	19	18	14	
	kW	1.08	1.11	1.14	1.18	1.17	1.19	1.23	1.27	1.24	1.27	1.31	1.36	1.31	1.34	1.38	1.43	1.37	1.40	1.45	1.50	1.42	1.45	1.50	1.55	
	Amps	4.3	4.4	4.5	4.7	4.6	4.7	4.9	5.0	5.0	5.1	5.3	5.5	5.3	5.4	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.1	6.3	6.6	
	Hi PR	213	229	242	253	239	258	272	284	272	293	309	323	310	334	352	367	349	375	396	413	385	415	438	457	
	Lo PR	116	123	134	143	122	130	142	151	127	135	147	157	133	142	155	165	140	149	162	173	145	154	168	179	
	MBh	17.8	18.2	19.4	20.8	17.4	17.8	19.0	20.3	17.0	17.3	18.5	19.8	16.5	16.9	18.1	19.3	15.7	16.1	17.2	18.3	14.6	14.9	15.9	17.0	
	S/T	0.94	0.88	0.72	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61	
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	24	20	16	23	23	20	16	21	21	19	15	
kW	1.07	1.10	1.13	1.17	1.16	1.18	1.22	1.26	1.23	1.26	1.30	1.35	1.30	1.33	1.37	1.42	1.36	1.39	1.43	1.48	1.40	1.44	1.48	1.54		
Amps	4.2	4.3	4.5	4.6	4.6	4.7	4.8	5.0	4.9	5.1	5.2	5.4	5.3	5.4	5.6	5.8	5.6	5.7	5.9	6.2	5.9	6.1	6.3	6.5		
Hi PR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	349	364	345	372	392	409	381	411	433	452		
Lo PR	114	122	133	142	121	129	140	150	126	134	146	155	132	140	153	163	138	147	161	171	143	152	166	177		
MBh	16.9	17.3	18.4	19.7	16.5	16.9	18.0	19.3	16.1	16.5	17.6	18.8	15.7	16.1	17.2	18.3	14.9	15.3	16.3	17.4	13.8	14.1	15.1	16.1		
S/T	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.02	0.96	0.78	0.58	1.03	0.97	0.79	0.59		
ΔT	25	23	20	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	16	23	22	19	15		
kW	1.06	1.08	1.11	1.15	1.14	1.16	1.20	1.24	1.21	1.24	1.28	1.32	1.28	1.31	1.35	1.40	1.33	1.36	1.41	1.46	1.38	1.41	1.46	1.51		
Amps	4.1	4.2	4.4	4.5	4.5	4.6	4.7	4.9	4.8	5.0	5.1	5.3	5.2	5.3	5.5	5.7	5.5	5.6	5.8	6.0	5.8	6.0	6.2	6.4		
Hi PR	207	223	235	245	232	250	264	275	264	284	300	313	301	324	342	356	338	364	384	401	374	402	425	443		
Lo PR	112	119	130	139	118	126	138	147	123	131	143	152	129	138	150	160	136	144	157	168	140	149	163	173		

85	731	MBh	18.6	19.0	19.9	21.2	18.2	18.6	19.4	20.7	17.8	18.1	19.0	20.2	17.3	17.7	18.5	19.7	16.5	16.8	17.6	18.8	15.3	15.6	16.3	17.4
		S/T	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.84
	ΔT	23	24	22	19	23	23	23	20	22	23	23	20	22	22	23	20	21	21	22	20	19	20	20	18	
	kW	1.09	1.11	1.15	1.19	1.18	1.20	1.24	1.29	1.25	1.28	1.32	1.37	1.32	1.35	1.40	1.44	1.38	1.41	1.46	1.51	1.43	1.46	1.51	1.56	
	Amps	4.3	4.4	4.5	4.7	4.6	4.7	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.7	5.8	6.0	6.3	6.0	6.2	6.4	6.6	
	Hi PR	215	232	245	255	242	260	275	286	275	296	312	326	313	337	356	371	352	379	400	417	389	419	442	461	
	Lo PR	117	124	136	144	123	131	143	153	128	136	149	159	135	143	156	167	141	150	164	175	146	155	170	181	
	MBh	18.1	18.4	19.3	20.6	17.7	18.0	18.9	20.1	17.3	17.6	18.4	19.7	16.8	17.2	18.0	19.2	16.0	16.3	17.1	18.2	14.8	15.1	15.8	16.9	
	S/T	0.98	0.95	0.86	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80	
	ΔT	26	25	24	21	26	26	24	21	25	25	24	21	24	25	24	21	23	24	24	21	21	22	22	19	
kW	1.08	1.11	1.14	1.18	1.17	1.19	1.23	1.27	1.24	1.27	1.31	1.36	1.31	1.34	1.38	1.43	1.37	1.40	1.45	1.50	1.42	1.45	1.50	1.55		
Amps	4.3	4.4	4.5	4.7	4.6	4.7	4.9	5.0	5.0	5.1	5.3	5.5	5.3	5.4	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.1	6.3	6.6		
Hi PR	213	229	242	253	239	258	272	284	272	293	309	323	310	334	352	367	349	375	396	413	385	415	438	457		
Lo PR	116	123	134	143	122	130	142	151	127	135	147	157	133	142	155	165	140	149	162	173	145	154	168	179		
MBh	17.2	17.5	18.4	19.6	16.8	17.1	17.9	19.1	16.4	16.7	17.5	18.7	16.0	16.3	17.1	18.2	15.2	15.5	16.2	17.3	14.1	14.3	15.0	16.0		
S/T	0.94	0.91	0.82	0.66	0.98	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76		
ΔT	26.1	26	24	21	26	26	25	21	26	26	25	21	26	26	25	21	25	25	24	21	23	23	23	20		
kW	1.06	1.09	1.12	1.16	1.15	1.17	1.21	1.25	1.22	1.25	1.29	1.33	1.29	1.32	1.36	1.41	1.34	1.37	1.42	1.47	1.39	1.42	1.47	1.52		
Amps	4.2	4.3	4.4	4.6	4.5	4.6	4.8	4.9	4.9	5.0	5.2	5.4	5.2	5.3	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.0	6.2	6.5		
Hi PR	209	225	237	248	235	252	266	278	267	287	303	316	304	327	345	360	342	368	388	405	378	406	429	448		
Lo PR	113	121	132	140	120	127	139	148	124	132	144	154	131	139	152	162	137	146	159	169	142	151	164	175		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is AHRI (TV) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — DSZC160241A* / CA*F3636*6** + TXV / MBVC1600** -1 HIGH STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	984	MBh	23.5	24.4	26.7	-	23.0	23.8	26.1	-	22.4	23.2	25.5	-	21.9	22.7	24.8	-	20.8	21.5	23.6	-	19.3	20.0	21.9	-	
		S/T	0.80	0.66	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.87	0.73	0.51	-	0.91	0.76	0.52	-	0.91	0.76	0.53	-	
		ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-	
	875	KW	1.56	1.60	1.65	-	1.68	1.72	1.78	-	1.79	1.83	1.90	-	1.89	1.93	2.00	-	1.97	2.02	2.09	-	2.04	2.09	2.16	-	
		Amps	6.0	6.1	6.3	-	6.5	6.6	6.8	-	7.0	7.2	7.4	-	7.5	7.7	7.9	-	8.0	8.2	8.5	-	8.5	8.7	9.0	-	
		Hi PR	223	240	253	-	250	269	284	-	284	306	323	-	324	349	368	-	365	392	414	-	403	433	458	-	
	766	Lo PR	111	118	129	-	117	125	136	-	122	130	142	-	128	136	149	-	134	143	156	-	139	148	161	-	
		MBh	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.8	22.6	24.7	-	21.2	22.0	24.1	-	20.2	20.9	22.9	-	18.7	19.4	21.2	-	
		S/T	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-	
	75	984	MBh	23.9	24.6	26.7	28.6	23.4	24.1	26.0	27.9	22.8	23.5	25.4	27.3	22.2	22.9	24.8	26.6	21.1	21.8	23.6	25.3	19.6	20.2	21.8	23.4
			S/T	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.96	0.86	0.65	0.42	0.99	0.89	0.67	0.43	1.00	0.92	0.70	0.45	1.00	0.93	0.70	0.45
			ΔT	20	19	15	11	20	19	15	11	21	19	15	11	21	19	16	11	20	19	15	11	18	17	14	10
875		KW	1.57	1.61	1.66	1.72	1.70	1.74	1.79	1.85	1.81	1.85	1.91	1.98	1.91	1.95	2.02	2.08	1.99	2.03	2.10	2.18	2.06	2.11	2.18	2.26	
		Amps	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.1	8.3	8.5	8.9	8.5	8.7	9.0	9.4	
		Hi PR	225	242	256	267	253	272	287	300	287	309	327	341	327	352	372	388	368	396	418	436	407	438	462	482	
766		Lo PR	112	119	130	139	119	126	138	147	123	131	143	152	129	138	150	160	136	144	157	168	140	149	163	173	
		MBh	23.2	23.9	25.9	27.8	22.7	23.4	25.3	27.1	22.1	22.8	24.7	26.5	21.6	22.2	24.1	25.8	20.5	21.1	22.9	24.5	19.0	19.6	21.2	22.7	
		S/T	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.67	0.43	0.99	0.89	0.67	0.43	
75		875	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	20	16	11	20	18	15	10
			KW	1.56	1.60	1.65	1.70	1.68	1.72	1.78	1.84	1.79	1.83	1.90	1.96	1.89	1.93	2.00	2.07	1.97	2.02	2.09	2.16	2.04	2.09	2.16	2.24
			Amps	6.0	6.1	6.3	6.6	6.5	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.3
	766	Hi PR	223	240	253	264	250	269	284	297	285	306	323	337	324	349	368	384	365	392	414	432	403	434	458	477	
		Lo PR	111	118	129	137	117	125	136	145	122	130	142	151	128	136	149	158	134	143	156	166	139	148	161	172	
		MBh	21.4	22.1	23.9	25.6	20.9	21.6	23.3	25.0	20.4	21.0	22.8	24.4	19.9	20.5	22.2	23.8	18.9	19.5	21.1	22.7	17.5	18.1	19.6	21.0	
	766	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.88	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.85	0.65	0.42	
		ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	19	15	10	
		KW	1.52	1.56	1.61	1.66	1.64	1.68	1.73	1.79	1.75	1.79	1.85	1.91	1.84	1.88	1.95	2.01	1.92	1.97	2.03	2.10	1.99	2.04	2.10	2.18	
	766	Amps	5.8	6.0	6.2	6.4	6.3	6.4	6.6	6.9	6.8	7.0	7.2	7.5	7.3	7.5	7.7	8.0	7.8	8.0	8.2	8.5	8.2	8.4	8.7	9.0	
		Hi PR	216	233	246	256	243	261	276	288	276	297	314	327	314	338	357	373	354	381	402	419	391	421	444	463	
		Lo PR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	139	151	161	135	143	156	167	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — DSZC160241A* / CA*F3636*6** + TXV / MBVC1600** -1 HIGH STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	24.3	24.9	26.6	28.4	23.8	24.3	26.0	27.7	23.2	23.7	25.3	27.1	22.6	23.1	24.7	26.4	21.5	22.0	23.5	25.1	19.9	20.4	21.8	23.3
	S/T	1.00	0.93	0.76	0.57	1.00	0.96	0.79	0.59	1.00	1.00	0.81	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.86	0.64	1.00	1.00	0.87	0.65
	ΔT	23	22	19	15	22	22	19	15	21	22	19	15	21	22	19	15	20	21	19	15	19	19	18	14
	kW	1.59	1.62	1.67	1.73	1.71	1.75	1.81	1.87	1.82	1.87	1.93	1.99	1.92	1.97	2.03	2.10	2.01	2.05	2.12	2.20	2.08	2.13	2.20	2.28
	Amps	6.1	6.2	6.4	6.7	6.6	6.7	7.0	7.2	7.1	7.3	7.6	7.9	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5
	Hi PR	227	245	258	270	255	275	290	303	290	312	330	344	331	356	376	392	372	400	423	441	411	442	467	487
	Lo PR	113	121	132	140	120	127	139	148	124	132	145	154	131	139	152	162	137	146	159	169	142	151	165	175
	MBh	23.6	24.1	25.8	27.6	23.1	23.6	25.2	26.9	22.5	23.0	24.6	26.3	22.0	22.5	24.0	25.7	20.9	21.3	22.8	24.4	19.3	19.8	21.1	22.6
	S/T	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	22	22	20	16	20	21	18	15
kW	1.57	1.61	1.66	1.72	1.70	1.74	1.79	1.85	1.81	1.85	1.91	1.98	1.91	1.95	2.02	2.08	1.99	2.03	2.10	2.18	2.06	2.11	2.18	2.26	
Amps	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.1	8.3	8.5	8.9	8.5	8.7	9.0	9.4	
Hi PR	225	242	256	267	253	272	287	300	287	309	327	341	327	352	372	388	368	396	419	436	407	438	462	482	
Lo PR	112	119	130	139	119	126	138	147	123	131	143	152	129	138	150	160	136	144	158	168	140	149	163	174	
MBh	21.8	22.3	23.8	25.5	21.3	21.8	23.3	24.9	20.8	21.3	22.7	24.3	20.3	20.7	22.2	23.7	19.3	19.7	21.0	22.5	17.9	18.2	19.5	20.8	
S/T	0.91	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.04	0.97	0.79	0.59	1.05	0.98	0.80	0.60	
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	22	19	15	
kW	1.54	1.57	1.62	1.67	1.66	1.69	1.75	1.81	1.76	1.80	1.86	1.93	1.86	1.90	1.96	2.03	1.94	1.98	2.05	2.12	2.01	2.05	2.12	2.20	
Amps	5.9	6.0	6.2	6.4	6.3	6.5	6.7	7.0	6.9	7.1	7.3	7.6	7.4	7.5	7.8	8.1	7.8	8.0	8.3	8.6	8.3	8.5	8.8	9.1	
Hi PR	218	235	248	259	245	264	279	291	279	300	317	330	318	342	361	376	357	384	406	423	395	425	449	468	
Lo PR	109	116	126	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	168	

85	MBh	24.8	25.2	26.4	28.2	24.2	24.7	25.8	27.6	23.6	24.1	25.2	26.9	23.0	23.5	24.6	26.2	21.9	22.3	23.4	24.9	20.3	20.7	21.6	23.1
	S/T	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.96	0.78	1.00	1.00	0.99	0.81	1.00	1.00	1.00	0.84	1.00	1.00	1.00	0.84
	ΔT	23	24	22	19	23	23	23	20	22	22	23	20	22	22	23	20	20	21	22	19	19	19	20	18
	kW	1.60	1.64	1.69	1.74	1.73	1.77	1.82	1.89	1.84	1.88	1.94	2.01	1.94	1.98	2.05	2.12	2.02	2.07	2.14	2.21	2.10	2.14	2.22	2.30
	Amps	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.2	7.4	7.6	7.9	7.7	7.9	8.2	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.6
	Hi PR	230	247	261	272	258	277	293	306	293	316	333	348	334	359	379	396	376	404	427	445	415	447	472	492
	Lo PR	114	122	133	142	121	129	140	150	126	134	146	155	132	140	153	163	138	147	161	171	143	152	166	177
	MBh	24.0	24.5	25.7	27.4	23.5	23.9	25.1	26.8	22.9	23.4	24.5	26.1	22.4	22.8	23.9	25.5	21.2	21.7	22.7	24.2	19.7	20.1	21.0	22.4
	S/T	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80
	ΔT	25	25	23	20	25	25	24	20	24	25	24	20	24	24	24	21	22	23	23	20	21	21	22	19
kW	1.59	1.62	1.67	1.73	1.71	1.75	1.81	1.87	1.82	1.87	1.93	1.99	1.92	1.97	2.03	2.10	2.01	2.05	2.12	2.20	2.08	2.13	2.20	2.28	
Amps	6.1	6.2	6.4	6.7	6.6	6.7	7.0	7.2	7.1	7.3	7.6	7.9	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	
Hi PR	227	245	258	270	255	275	290	303	290	312	330	344	331	356	376	392	372	400	423	441	411	442	467	487	
Lo PR	113	121	132	140	120	127	139	148	124	132	145	154	131	139	152	162	137	146	159	169	142	151	165	175	
MBh	22.2	22.6	23.7	25.3	21.7	22.1	23.1	24.7	21.2	21.6	22.6	24.1	20.6	21.0	22.0	23.5	19.6	20.0	20.9	22.3	18.2	18.5	19.4	20.7	
S/T	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	
ΔT	25	25	24	21	26	25	24	21	25	25	24	21	25	25	24	21	24	24	24	21	22	22	22	19	
kW	1.55	1.58	1.63	1.69	1.67	1.71	1.76	1.82	1.78	1.82	1.88	1.94	1.87	1.92	1.98	2.05	1.95	2.00	2.07	2.14	2.02	2.07	2.14	2.22	
Amps	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.0	7.0	7.1	7.4	7.6	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.2	
Hi PR	221	237	251	262	248	266	281	293	282	303	320	334	321	345	364	380	361	388	410	428	399	429	453	472	
Lo PR	110	117	128	136	116	124	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	160	170	

kW = Total system power
Amps = outdoor unit amps (comp. + fan)

Shaded area is AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — DSZC160361A* / CA*F3743*6** + TXV / MBVC1600** -1 LOW STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	900	MBh	24.7	25.6	28.1	-	24.1	25.0	27.4	-	23.6	24.4	26.8	-	23.0	23.8	26.1	-	21.8	22.6	24.8	-	20.2	21.0	23.0	-
		S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	12	-	18	15	12	-	
	kW	1.44	1.48	1.52	-	1.56	1.59	1.64	-	1.66	1.69	1.75	-	1.74	1.78	1.84	-	1.82	1.86	1.92	-	1.88	1.93	1.99	-	
	Amps	5.8	5.9	6.1	-	6.2	6.3	6.5	-	6.7	6.9	7.1	-	7.2	7.3	7.6	-	7.6	7.8	8.0	-	8.0	8.2	8.5	-	
	Hi PR	207	223	236	-	233	250	265	-	265	285	301	-	302	324	343	-	339	365	385	-	375	403	426	-	
	Lo PR	111	118	129	-	117	124	136	-	122	129	141	-	128	136	148	-	134	142	155	-	138	147	161	-	
	MBh	24.0	24.9	27.3	-	23.4	24.3	26.6	-	22.9	23.7	26.0	-	22.3	23.1	25.4	-	21.2	22.0	24.1	-	19.6	20.4	22.3	-	
	S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	
kW	1.43	1.46	1.51	-	1.54	1.58	1.63	-	1.64	1.68	1.73	-	1.73	1.77	1.83	-	1.80	1.84	1.91	-	1.87	1.91	1.97	-		
Amps	5.7	5.8	6.0	-	6.2	6.3	6.5	-	6.7	6.8	7.0	-	7.1	7.3	7.5	-	7.5	7.7	8.0	-	8.0	8.1	8.4	-		
Hi PR	205	221	233	-	230	248	262	-	262	282	298	-	299	321	339	-	336	361	382	-	371	399	422	-		
Lo PR	110	117	127	-	116	123	135	-	120	128	140	-	126	135	147	-	133	141	154	-	137	146	159	-		
MBh	22.2	23.0	25.2	-	21.6	22.4	24.6	-	21.1	21.9	24.0	-	20.6	21.4	23.4	-	19.6	20.3	22.2	-	18.1	18.8	20.6	-		
S/T	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-		
ΔT	20	17	13	-	20	18	13	-	20	18	13	-	20	18	13	-	20	17	13	-	19	16	12	-		
kW	1.40	1.43	1.47	-	1.51	1.54	1.59	-	1.60	1.64	1.69	-	1.69	1.72	1.78	-	1.76	1.80	1.86	-	1.82	1.86	1.92	-		
Amps	5.6	5.7	5.9	-	6.0	6.1	6.3	-	6.5	6.6	6.8	-	6.9	7.1	7.3	-	7.3	7.5	7.7	-	7.7	7.9	8.2	-		
Hi PR	199	214	226	-	224	241	254	-	254	274	289	-	290	312	329	-	326	351	370	-	360	387	409	-		
Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	142	-	129	137	149	-	133	141	154	-		

75	900	MBh	25.1	25.9	28.0	30.1	24.6	25.3	27.4	29.4	24.0	24.7	26.7	28.7	23.4	24.1	26.1	28.0	22.2	22.9	24.8	26.6	20.6	21.2	22.9	24.6
		S/T	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.86	0.65	0.42	0.97	0.87	0.66	0.42
	ΔT	22	20	16	11	22	20	17	12	22	20	17	12	22	20	17	12	22	20	17	11	20	19	15	11	
	kW	1.46	1.49	1.53	1.59	1.57	1.60	1.66	1.71	1.67	1.71	1.76	1.82	1.76	1.80	1.86	1.92	1.83	1.88	1.94	2.00	1.90	1.94	2.01	2.08	
	Amps	5.8	5.9	6.1	6.3	6.3	6.4	6.6	6.8	6.8	6.9	7.2	7.4	7.2	7.4	7.6	7.9	7.7	7.8	8.1	8.4	8.1	8.3	8.6	8.9	
	Hi PR	210	226	238	248	235	253	267	279	267	288	304	317	305	328	346	361	343	369	389	406	379	407	430	449	
	Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	162	173	
	MBh	24.4	25.1	27.2	29.2	23.8	24.5	26.6	28.5	23.3	24.0	25.9	27.8	22.7	23.4	25.3	27.2	21.6	22.2	24.0	25.8	20.0	20.6	22.3	23.9	
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11	
kW	1.44	1.48	1.52	1.57	1.56	1.59	1.64	1.70	1.66	1.69	1.75	1.81	1.74	1.78	1.84	1.90	1.82	1.86	1.92	1.99	1.88	1.93	1.99	2.06		
Amps	5.8	5.9	6.1	6.3	6.2	6.3	6.5	6.8	6.7	6.9	7.1	7.3	7.2	7.3	7.6	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8		
Hi PR	207	223	236	246	233	251	265	276	265	285	301	314	302	325	343	357	339	365	386	402	375	403	426	444		
Lo PR	111	118	129	137	117	125	136	145	122	129	141	150	128	136	148	158	134	142	156	166	139	147	161	171		
MBh	22.5	23.2	25.1	26.9	22.0	22.7	24.5	26.3	21.5	22.1	23.9	25.7	21.0	21.6	23.4	25.1	19.9	20.5	22.2	23.8	18.4	19.0	20.6	22.1		
S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.90	0.80	0.61	0.39		
ΔT	23	21	17	12	23	22	18	12	23	22	18	12	24	22	18	12	24	22	18	12	22	20	16	11		
kW	1.41	1.44	1.49	1.53	1.52	1.55	1.60	1.65	1.62	1.65	1.70	1.76	1.70	1.74	1.80	1.86	1.77	1.81	1.87	1.94	1.83	1.88	1.94	2.01		
Amps	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.0	7.1	7.4	7.6	7.4	7.6	7.8	8.1	7.8	8.0	8.3	8.6		
Hi PR	201	217	229	239	226	243	257	268	257	276	292	304	293	315	332	347	329	354	374	390	364	391	413	431		
Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — DSZC160361A* / CA*F3743*6** + TXV / MBVC1600** -1 LOW STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	25.6	26.1	27.9	29.9	25.0	25.5	27.3	29.2	24.4	24.9	26.6	28.5	23.8	24.3	26.0	27.8	22.6	23.1	24.7	26.4	20.9	21.4	22.9	24.4
	S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.74	0.55	1.00	0.93	0.75	0.56	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.82	0.61
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	24	24	21	17	23	24	20	16	21	22	19	15
	kW	1.47	1.50	1.55	1.60	1.58	1.62	1.67	1.73	1.68	1.72	1.78	1.84	1.77	1.81	1.87	1.94	1.85	1.89	1.95	2.02	1.92	1.96	2.02	2.09
	Amps	5.9	6.0	6.2	6.4	6.3	6.5	6.7	6.9	6.8	7.0	7.2	7.5	7.3	7.5	7.7	8.0	7.7	7.9	8.2	8.5	8.2	8.4	8.6	9.0
	Hi PR	212	228	241	251	238	256	270	282	270	291	307	320	308	331	350	365	346	372	393	410	382	412	435	453
	Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	151	161	137	145	159	169	141	150	164	175
	MBh	24.8	25.4	27.1	29.0	24.3	24.8	26.5	28.3	23.7	24.2	25.9	27.6	23.1	23.6	25.2	27.0	22.0	22.4	24.0	25.6	20.3	20.8	22.2	23.7
	S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58
	ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	25	24	21	17	23	23	20	16
kW	1.46	1.49	1.54	1.59	1.57	1.60	1.66	1.71	1.67	1.71	1.76	1.82	1.72	1.76	1.81	1.86	1.83	1.88	1.94	2.00	1.90	1.94	2.01	2.08	
Amps	5.8	5.9	6.1	6.3	6.3	6.4	6.6	6.8	6.8	6.9	7.2	7.4	7.2	7.4	7.6	7.9	7.7	7.8	8.1	8.4	8.1	8.3	8.6	8.9	
Hi PR	210	226	238	248	235	253	267	279	267	288	304	317	305	328	346	361	343	369	389	406	379	407	430	449	
Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	162	173	
MBh	22.9	23.4	25.0	26.8	22.4	22.9	24.5	26.1	21.9	22.3	23.9	25.5	21.3	21.8	23.3	24.9	20.3	20.7	22.1	23.7	18.8	19.2	20.5	21.9	
S/T	0.86	0.80	0.65	0.49	0.89	0.83	0.68	0.51	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.56	0.98	0.92	0.75	0.56	
ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	18	26	25	22	17	24	23	20	16	
kW	1.42	1.45	1.50	1.55	1.53	1.56	1.62	1.67	1.63	1.66	1.72	1.78	1.71	1.75	1.81	1.87	1.79	1.83	1.89	1.95	1.85	1.89	1.96	2.02	
Amps	5.7	5.8	6.0	6.2	6.1	6.2	6.4	6.7	6.6	6.8	7.0	7.2	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.3	8.6	
Hi PR	203	219	231	241	228	245	259	270	259	279	295	307	295	318	336	350	332	358	378	394	367	395	417	435	
Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
85	MBh	26.0	26.5	27.8	29.7	25.4	25.9	27.2	29.0	24.8	25.3	26.5	28.3	24.2	24.7	25.9	27.6	23.0	23.5	24.6	26.2	21.3	21.7	22.8	24.3
	S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.78	1.00	1.00	0.98	0.79
	ΔT	26	26	24	21	26	26	24	21	25	26	24	21	25	25	25	21	24	24	24	21	22	22	23	20
	kW	1.48	1.51	1.56	1.61	1.60	1.63	1.68	1.74	1.70	1.74	1.79	1.85	1.79	1.83	1.89	1.95	1.87	1.91	1.97	2.04	1.93	1.98	2.04	2.11
	Amps	5.9	6.1	6.2	6.5	6.4	6.5	6.7	7.0	6.9	7.1	7.3	7.5	7.3	7.5	7.8	8.0	7.8	8.0	8.2	8.5	8.2	8.4	8.7	9.0
	Hi PR	214	230	243	253	240	258	273	284	273	294	310	323	311	334	353	368	350	376	397	414	386	416	439	458
	Lo PR	114	121	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	177
	MBh	25.3	25.8	27.0	28.8	24.7	25.2	26.4	28.1	24.1	24.6	25.7	27.5	23.5	24.0	25.1	26.8	22.3	22.8	23.8	25.4	20.7	21.1	22.1	23.6
	S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75
	ΔT	27	27	25	22	27	27	25	22	27	27	25	22	27	27	26	22	26	26	25	22	24	24	24	20
kW	1.47	1.50	1.55	1.60	1.58	1.62	1.67	1.73	1.68	1.72	1.78	1.84	1.77	1.81	1.87	1.94	1.85	1.89	1.95	2.02	1.92	1.96	2.02	2.09	
Amps	5.9	6.0	6.2	6.4	6.3	6.5	6.7	6.9	6.8	7.0	7.2	7.5	7.3	7.5	7.7	8.0	7.7	7.9	8.2	8.5	8.2	8.4	8.6	9.0	
Hi PR	212	228	241	251	238	256	270	282	270	291	307	320	308	331	350	365	346	372	393	410	382	412	435	453	
Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	151	161	137	145	159	169	141	150	164	175	
MBh	23.3	23.8	24.9	26.6	22.8	23.2	24.3	26.0	22.2	22.7	23.8	25.3	21.7	22.1	23.2	24.7	20.6	21.0	22.0	23.5	19.1	19.5	20.4	21.8	
S/T	0.90	0.87	0.78	0.63	0.93	0.90	0.81	0.66	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	0.99	0.90	0.73	
ΔT	27.5	27	26	22	28	27	26	22	28	27	26	22	28	28	26	23	27	27	26	22	25	25	24	21	
kW	1.43	1.46	1.51	1.56	1.54	1.58	1.63	1.68	1.64	1.68	1.73	1.79	1.73	1.77	1.83	1.89	1.80	1.84	1.90	1.97	1.87	1.91	1.97	2.04	
Amps	5.7	5.8	6.0	6.2	6.2	6.3	6.5	6.7	6.7	6.8	7.0	7.3	7.1	7.3	7.5	7.8	7.5	7.7	8.0	8.2	8.0	8.1	8.4	8.7	
Hi PR	205	221	233	243	230	248	262	273	262	282	298	311	298	321	339	354	336	361	382	398	371	399	422	440	
Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	126	135	147	156	133	141	154	164	137	146	159	170	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — DSZC160361A* / CA*F3743*6** + TXV / MBVC1600** -1 HIGH STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1294	MBh	33.9	35.1	38.5	-	33.1	34.3	37.6	-	32.3	33.5	36.7	-	31.5	32.7	35.8	-	30.0	31.1	34.0	-	27.8	28.8	31.5	-	
		S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	
		ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-	
	1150	kW	2.16	2.20	2.27	-	2.33	2.38	2.46	-	2.48	2.53	2.62	-	2.61	2.67	2.76	-	2.72	2.78	2.88	-	2.82	2.88	2.98	-	
		Amps	8.3	8.5	8.8	-	9.0	9.2	9.5	-	9.7	10.0	10.3	-	10.4	10.7	11.0	-	11.1	11.3	11.7	-	11.7	12.0	12.4	-	
		Hi PR	220	237	250	-	247	266	280	-	281	302	319	-	320	344	363	-	360	387	409	-	397	428	452	-	
	1006	Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	135	143	156	-	
		MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.6	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	26.9	27.9	30.6	-	
		S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	
	75	1294	MBh	34.5	35.5	38.4	41.2	33.7	34.7	37.5	40.3	32.9	33.8	36.6	39.3	32.1	33.0	35.7	38.4	30.5	31.4	34.0	36.4	28.2	29.1	31.5	33.8
			S/T	0.84	0.75	0.57	0.36	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42
			ΔT	21	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
1150		kW	2.17	2.22	2.29	2.37	2.35	2.40	2.48	2.56	2.50	2.55	2.64	2.73	2.63	2.69	2.78	2.88	2.74	2.81	2.90	3.00	2.84	2.91	3.01	3.11	
		Amps	8.4	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.8	10.1	10.4	10.8	10.5	10.8	11.1	11.5	11.2	11.4	11.8	12.3	11.8	12.1	12.5	13.0	
		Hi PR	222	239	253	263	249	268	283	296	284	305	322	336	323	348	367	383	363	391	413	431	401	432	456	476	
1006		Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	163	136	145	158	168	
		MBh	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.9	35.6	38.2	31.1	32.1	34.7	37.2	29.6	30.5	33.0	35.4	27.4	28.2	30.5	32.8	
		S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40	
75		1294	MBh	21.6	2.20	2.28	2.35	2.33	2.38	2.46	2.54	2.48	2.53	2.62	2.70	2.61	2.67	2.76	2.85	2.72	2.78	2.88	2.98	2.82	2.88	2.98	3.08
			Amps	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.8	9.7	10.0	10.3	10.7	10.4	10.7	11.0	11.4	11.1	11.3	11.7	12.2	11.7	12.0	12.4	12.9
			Hi PR	220	237	250	261	247	266	281	293	281	302	319	333	320	344	363	379	360	387	409	426	397	428	452	471
	1006	Lo PR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	138	151	161	135	143	156	166	
		MBh	30.9	31.8	34.4	37.0	30.2	31.1	33.6	36.1	29.5	30.3	32.8	35.2	28.7	29.6	32.0	34.4	27.3	28.1	30.4	32.7	25.3	26.0	28.2	30.3	
		S/T	0.77	0.69	0.52	0.34	0.80	0.71	0.54	0.35	0.82	0.73	0.55	0.36	0.84	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.88	0.79	0.60	0.39	
	75	1294	MBh	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	11	22	20	16	11	20	19	15	11
			Amps	2.10	2.15	2.22	2.29	2.27	2.32	2.39	2.47	2.41	2.47	2.55	2.64	2.54	2.60	2.69	2.78	2.65	2.71	2.80	2.90	2.75	2.81	2.90	3.00
			Hi PR	8.1	8.3	8.6	8.9	8.7	8.9	9.2	9.6	9.5	9.7	10.0	10.4	10.1	10.4	10.7	11.1	10.8	11.0	11.4	11.8	11.4	11.7	12.1	12.5
		1006	Lo PR	213	230	243	253	239	258	272	284	272	293	309	323	310	334	352	368	349	376	397	414	386	415	438	457
			MBh	104	111	121	129	110	117	128	136	115	122	133	142	120	128	140	149	126	134	147	156	131	139	152	161
			S/T	0.77	0.69	0.52	0.34	0.80	0.71	0.54	0.35	0.82	0.73	0.55	0.36	0.84	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.88	0.79	0.60	0.39

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — DSZC160361A* / CA*F3743*6** + TXV / MBVC1600** -1 HIGH STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1294	MBh	35.1	35.9	38.3	41.0	34.3	35.0	37.4	40.0	33.5	34.2	36.5	39.0	32.6	33.4	35.6	38.1	31.0	31.7	33.9	36.2	28.7	29.4	31.4	33.5	
		S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	1.00	0.92	0.74	0.56	1.00	0.94	0.77	0.57	1.00	1.00	0.80	0.60	1.00	1.00	0.80	0.60	
		ΔT	23	22	19	15	23	22	19	15	24	22	19	15	23	22	19	16	22	23	23	19	15	20	21	18	14
	1150	kW	2.19	2.24	2.31	2.39	2.37	2.42	2.50	2.58	2.52	2.58	2.66	2.75	2.65	2.71	2.80	2.90	2.77	2.83	2.93	3.03	2.87	2.93	3.03	3.14	
		Amps	8.5	8.7	8.9	9.3	9.1	9.4	9.7	10.0	9.9	10.2	10.5	10.9	10.6	10.9	11.2	11.6	11.3	11.5	11.9	12.4	11.9	12.2	12.6	13.1	
		Hi PR	224	242	255	266	252	271	286	299	286	308	325	339	326	351	371	387	367	395	417	435	406	436	461	481	
	1006	Lo PR	110	117	128	136	116	123	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	
		MBh	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.5	37.9	31.7	32.4	34.6	37.0	30.1	30.8	32.9	35.1	27.9	28.5	30.4	32.5	
		S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.94	0.76	0.57	1.00	0.94	0.77	0.57	
	85	1294	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15
			kW	2.18	2.22	2.29	2.37	2.35	2.40	2.48	2.56	2.50	2.55	2.64	2.73	2.63	2.69	2.78	2.88	2.74	2.81	2.90	3.00	2.84	2.91	3.01	3.11
			Amps	8.4	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.8	10.1	10.4	10.8	10.5	10.8	11.1	11.5	11.2	11.4	11.8	12.3	11.8	12.1	12.5	13.0
1150		Hi PR	222	239	253	263	249	268	283	296	284	305	322	336	323	348	367	383	363	391	413	431	401	432	456	476	
		Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	163	136	145	158	168	
		MBh	31.4	32.1	34.3	36.7	30.7	31.4	33.5	35.8	30.0	30.6	32.7	35.0	29.3	29.9	31.9	34.1	27.8	28.4	30.3	32.4	25.7	26.3	28.1	30.0	
1006		S/T	0.84	0.79	0.64	0.48	0.88	0.82	0.67	0.50	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.97	0.91	0.74	0.55	
		ΔT	24	23	20	16	25	24	20	16	25	24	20	16	25	24	21	16	24	23	20	16	23	22	19	15	
		kW	2.12	2.17	2.24	2.31	2.29	2.34	2.41	2.50	2.44	2.49	2.57	2.66	2.56	2.62	2.71	2.80	2.67	2.74	2.83	2.92	2.77	2.83	2.93	3.03	
1294		Amps	8.2	8.4	8.6	8.9	8.8	9.0	9.3	9.7	9.6	9.8	10.1	10.5	10.2	10.5	10.8	11.2	10.9	11.1	11.5	11.9	11.5	11.8	12.2	12.6	
		Hi PR	216	232	245	255	242	260	275	287	275	296	313	326	313	337	356	371	352	379	401	418	389	419	443	462	
		Lo PR	105	112	122	130	111	119	129	138	116	123	134	143	122	129	141	150	127	136	148	158	132	140	153	163	
85	1294	MBh	35.7	36.4	38.1	40.7	34.9	35.6	37.2	39.7	34.0	34.7	36.3	38.8	33.2	33.9	35.5	37.8	31.6	32.2	33.7	35.9	29.2	29.8	31.2	33.3	
		S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	
		ΔT	24	24	23	20	25	24	23	20	24	24	23	20	24	24	23	20	22	23	23	20	21	21	21	18	
	1150	kW	2.21	2.26	2.33	2.41	2.39	2.44	2.52	2.60	2.54	2.60	2.68	2.77	2.68	2.74	2.83	2.93	2.79	2.86	2.95	3.05	2.89	2.96	3.06	3.17	
		Amps	8.5	8.7	9.0	9.4	9.2	9.4	9.7	10.1	10.0	10.3	10.6	11.0	10.7	11.0	11.3	11.7	11.4	11.7	12.0	12.5	12.0	12.3	12.8	13.2	
		Hi PR	227	244	258	269	254	274	289	301	289	311	329	343	329	355	374	391	371	399	421	439	410	441	465	485	
	1006	Lo PR	111	118	129	137	117	125	136	145	122	130	141	151	128	136	149	158	134	143	156	166	139	148	161	172	
		MBh	34.7	35.3	37.0	39.5	33.9	34.5	36.1	38.6	33.1	33.7	35.3	37.6	32.2	32.9	34.4	36.7	30.6	31.2	32.7	34.9	28.4	28.9	30.3	32.3	
		S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74	
	85	1294	ΔT	25	25	24	20	26	25	24	21	26	25	24	21	26	26	24	21	24	25	24	21	23	23	22	19
			kW	2.19	2.24	2.31	2.39	2.37	2.42	2.50	2.58	2.52	2.58	2.66	2.75	2.65	2.71	2.80	2.90	2.77	2.83	2.93	3.03	2.87	2.93	3.03	3.14
			Amps	8.5	8.7	8.9	9.3	9.1	9.4	9.7	10.0	9.9	10.2	10.5	10.9	10.6	10.9	11.2	11.6	11.3	11.5	11.9	12.4	11.9	12.2	12.6	13.1
1150		Hi PR	224	242	255	266	252	271	286	299	286	308	325	339	326	351	371	387	367	395	417	435	406	436	461	481	
		Lo PR	110	117	128	136	116	123	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	
		MBh	32.0	32.6	34.2	36.4	31.3	31.9	33.4	35.6	30.5	31.1	32.6	34.7	29.8	30.3	31.8	33.9	28.3	28.8	30.2	32.2	26.2	26.7	28.0	29.8	
1006		S/T	0.89	0.85	0.77	0.63	0.92	0.89	0.80	0.65	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	0.98	0.89	0.72	
		ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	25	21	26	26	24	21	24	24	23	20	
		kW	2.14	2.19	2.26	2.33	2.31	2.36	2.43	2.52	2.46	2.51	2.59	2.68	2.59	2.64	2.73	2.83	2.70	2.76	2.85	2.95	2.79	2.86	2.95	3.06	
1294		Amps	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.7	9.7	9.9	10.2	10.6	10.3	10.6	10.9	11.3	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.8	
		Hi PR	218	234	247	258	244	263	278	290	278	299	316	329	316	341	360	375	356	383	405	422	393	423	447	466	
		Lo PR	107	113	124	132	113	120	131	139	117	124	136	145	123	131	143	152	129	137	150	159	133	142	155	165	

High and low pressures are measured at the liquid and suction service valves.

IDB: Entering Indoor Dry Bulb Temperature

Shaded area is AHRI (TVA) conditions
kW = Total system power
Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — DSZC160481A* / CA*F4961*6** + TXV / MBVC2000** -1 Low Stage

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	33.7	35.0	38.3	-	33.0	34.2	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.6	-	29.8	30.9	33.9	-	27.6	28.6	31.4	-
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-
	ΔT	19	16	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-
	kW	1.96	2.00	2.07	-	2.12	2.16	2.23	-	2.25	2.30	2.38	-	2.37	2.43	2.51	-	2.48	2.53	2.62	-	2.57	2.62	2.71	-
	Amps	7.6	7.8	8.0	-	8.2	8.4	8.7	-	8.9	9.1	9.4	-	9.5	9.7	10.1	-	10.1	10.4	10.7	-	10.7	11.0	11.3	-
	Hi PR	205	220	233	-	230	247	261	-	261	281	297	-	297	320	338	-	335	360	380	-	370	398	420	-
	Lo PR	109	116	126	-	115	122	134	-	120	127	139	-	126	134	146	-	132	140	153	-	136	145	158	-
	MBh	32.8	34.0	37.2	-	32.0	33.2	36.3	-	31.2	32.4	35.5	-	30.5	31.6	34.6	-	28.9	30.0	32.9	-	26.8	27.8	30.4	-
	S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-
	kW	1.95	1.99	2.05	-	2.10	2.15	2.22	-	2.23	2.28	2.36	-	2.35	2.41	2.49	-	2.46	2.51	2.60	-	2.54	2.60	2.69	-
	Amps	7.5	7.7	8.0	-	8.1	8.3	8.6	-	8.8	9.0	9.3	-	9.4	9.7	10.0	-	10.0	10.3	10.6	-	10.6	10.9	11.2	-
Hi PR	203	218	230	-	227	245	258	-	259	278	294	-	294	317	335	-	331	356	376	-	366	394	416	-	
Lo PR	108	115	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	139	151	-	135	143	156	-	
MBh	30.2	31.3	34.3	-	29.5	30.6	33.5	-	28.8	29.9	32.7	-	28.1	29.1	31.9	-	26.7	27.7	30.3	-	24.7	25.7	28.1	-	
S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-	
ΔT	20	17	13	-	20	18	13	-	20	18	13	-	21	18	14	-	20	18	13	-	19	16	12	-	
kW	1.90	1.94	2.00	-	2.05	2.09	2.16	-	2.18	2.23	2.30	-	2.29	2.35	2.42	-	2.39	2.45	2.53	-	2.48	2.53	2.62	-	
Amps	7.3	7.5	7.8	-	7.9	8.1	8.4	-	8.6	8.8	9.1	-	9.2	9.4	9.7	-	9.8	10.0	10.3	-	10.3	10.6	10.9	-	
Hi PR	197	211	223	-	221	237	251	-	251	270	285	-	286	307	325	-	321	346	365	-	355	382	403	-	
Lo PR	105	111	121	-	110	117	128	-	115	122	133	-	121	128	140	-	126	134	147	-	131	139	152	-	

75	MBh	34.3	35.3	38.2	41.0	33.5	34.5	37.3	40.1	32.7	33.7	36.5	39.1	31.9	32.9	35.6	38.2	30.3	31.2	33.8	36.3	28.1	28.9	31.3	33.6
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
	ΔT	22	20	17	11	22	21	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11
	kW	1.98	2.02	2.09	2.16	2.13	2.18	2.25	2.33	2.27	2.32	2.40	2.48	2.39	2.45	2.53	2.62	2.50	2.56	2.64	2.73	2.59	2.65	2.74	2.83
	Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.9	9.6	9.8	10.2	10.5	10.2	10.5	10.8	11.2	10.8	11.1	11.4	11.9
	Hi PR	207	222	235	245	232	250	264	275	264	284	300	313	300	323	341	356	338	364	384	401	373	402	424	443
	Lo PR	110	117	128	136	116	124	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	160	170
	MBh	33.3	34.3	37.1	39.8	32.5	33.5	36.3	38.9	31.8	32.7	35.4	38.0	31.0	31.9	34.5	37.1	29.4	30.3	32.8	35.2	27.3	28.1	30.4	32.6
	S/T	0.80	0.72	0.54	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.92	0.83	0.63	0.40
	ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	21	18	12	23	21	17	12	22	20	16	11
	kW	1.96	2.00	2.07	2.14	2.12	2.16	2.23	2.31	2.25	2.30	2.38	2.46	2.37	2.43	2.51	2.60	2.48	2.53	2.62	2.71	2.57	2.63	2.71	2.81
	Amps	7.6	7.8	8.0	8.3	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.8	9.5	9.7	10.1	10.4	10.1	10.4	10.7	11.1	10.7	11.0	11.3	11.8
Hi PR	205	220	233	243	230	247	261	272	261	281	297	310	297	320	338	353	335	360	380	397	370	398	420	438	
Lo PR	109	116	126	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	168	
MBh	30.7	31.7	34.3	36.8	30.0	30.9	33.5	35.9	29.3	30.2	32.7	35.1	28.6	29.4	31.9	34.2	27.2	28.0	30.3	32.5	25.2	25.9	28.0	30.1	
S/T	0.78	0.69	0.53	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.89	0.80	0.60	0.39	
ΔT	23	21	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	11	
kW	1.91	1.95	2.02	2.08	2.06	2.11	2.18	2.25	2.20	2.25	2.32	2.40	2.31	2.37	2.45	2.53	2.41	2.47	2.55	2.64	2.50	2.56	2.64	2.74	
Amps	7.4	7.6	7.8	8.1	8.0	8.2	8.4	8.8	8.7	8.9	9.2	9.5	9.3	9.5	9.8	10.2	9.8	10.1	10.4	10.8	10.4	10.7	11.0	11.4	
Hi PR	199	214	226	235	223	240	253	264	253	273	288	300	289	311	328	342	325	349	369	385	359	386	408	425	
Lo PR	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DSZC160481A* / CA*F4961*6** + TXV / MBVC2000** -1 LOW STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	34.9	35.7	38.1	40.8	34.1	34.9	37.2	39.8	33.3	34.0	36.3	38.9	32.5	33.2	35.5	37.9	30.9	31.5	33.7	36.0	28.6	29.2	31.2	33.4
	S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.81	0.61
	ΔT	25	24	20	16	25	24	21	17	25	24	21	17	25	24	21	17	23	24	21	16	22	22	19	15
	kW	1.99	2.04	2.10	2.17	2.15	2.20	2.27	2.35	2.29	2.34	2.42	2.50	2.42	2.47	2.55	2.64	2.52	2.58	2.67	2.76	2.61	2.67	2.76	2.86
	Amps	7.7	7.9	8.2	8.5	8.4	8.6	8.8	9.2	9.1	9.3	9.6	10.0	9.7	9.9	10.3	10.6	10.3	10.6	10.9	11.3	10.9	11.2	11.6	12.0
	HiPR	209	225	237	247	234	252	266	278	266	287	303	316	303	327	345	360	341	367	388	405	377	406	429	447
	LoPR	111	118	129	137	117	125	136	145	122	130	142	151	128	136	149	158	134	143	156	166	139	148	161	172
	MBh	33.9	34.6	37.0	39.6	33.1	33.8	36.2	38.6	32.3	33.0	35.3	37.7	31.5	32.2	34.4	36.8	30.0	30.6	32.7	35.0	27.8	28.4	30.3	32.4
	S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16
kW	1.98	2.02	2.09	2.16	2.13	2.18	2.25	2.33	2.27	2.32	2.40	2.48	2.40	2.45	2.53	2.62	2.50	2.56	2.64	2.73	2.59	2.65	2.74	2.83	
Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.9	9.6	9.8	10.2	10.5	10.2	10.5	10.8	11.2	10.8	11.1	11.4	11.9	
HiPR	207	222	235	245	232	250	264	275	264	284	300	313	300	323	341	356	338	364	384	401	373	402	424	443	
LoPR	110	117	128	136	116	124	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	160	170	
MBh	31.3	32.0	34.2	36.5	30.6	31.2	33.4	35.7	29.8	30.5	32.6	34.8	29.1	29.7	31.8	34.0	27.7	28.3	30.2	32.3	25.6	26.2	28.0	29.9	
S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75	0.56	
ΔT	26	25	22	17	26	25	22	18	26	25	22	18	27	25	22	18	26	25	22	17	24	23	20	16	
kW	1.93	1.97	2.03	2.10	2.08	2.13	2.20	2.27	2.22	2.26	2.34	2.42	2.33	2.39	2.47	2.55	2.43	2.49	2.57	2.66	2.52	2.58	2.67	2.76	
Amps	7.5	7.6	7.9	8.2	8.1	8.3	8.5	8.8	8.8	9.0	9.3	9.6	9.3	9.6	9.9	10.3	9.9	10.2	10.5	10.9	10.5	10.8	11.1	11.6	
HiPR	201	216	228	238	225	242	256	267	256	275	291	303	291	314	331	345	328	353	373	389	362	390	412	429	
LoPR	107	113	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	159	133	142	155	165	

85	MBh	35.5	36.2	37.9	40.5	34.7	35.4	37.0	39.5	33.9	34.5	36.2	38.6	33.1	33.7	35.3	37.6	31.4	32.0	33.5	35.8	29.1	29.6	31.1	33.1
	S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79
	ΔT	26	26	24	21	26	26	25	21	26	26	25	21	25	26	25	21	24	24	25	21	22	23	23	20
	kW	2.01	2.05	2.12	2.19	2.17	2.22	2.29	2.37	2.31	2.36	2.44	2.53	2.44	2.49	2.58	2.66	2.54	2.60	2.69	2.78	2.63	2.69	2.79	2.88
	Amps	7.8	8.0	8.3	8.6	8.4	8.6	8.9	9.2	9.2	9.4	9.7	10.0	9.8	10.0	10.3	10.7	10.4	10.7	11.0	11.4	11.0	11.3	11.7	12.1
	HiPR	211	227	240	250	237	255	269	280	269	290	306	319	307	330	348	363	345	371	392	409	381	410	433	452
	LoPR	112	119	130	139	119	126	138	147	123	131	143	152	129	138	150	160	136	144	157	168	140	149	163	173
	MBh	34.5	35.2	36.8	39.3	33.7	34.3	36.0	38.4	32.9	33.5	35.1	37.5	32.1	32.7	34.3	36.5	30.5	31.1	32.5	34.7	28.2	28.8	30.1	32.2
	S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.93	0.75
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	27	27	26	22	26	27	26	22	24	25	24	21
kW	1.99	2.04	2.10	2.17	2.15	2.20	2.27	2.35	2.29	2.34	2.42	2.50	2.42	2.47	2.55	2.64	2.52	2.58	2.67	2.76	2.61	2.67	2.76	2.86	
Amps	7.7	7.9	8.2	8.5	8.4	8.6	8.8	9.2	9.1	9.3	9.6	10.0	9.7	9.9	10.3	10.6	10.3	10.6	10.9	11.3	10.9	11.2	11.6	12.0	
HiPR	209	225	237	247	234	252	266	278	266	287	303	316	303	327	345	360	341	367	388	405	377	406	429	447	
LoPR	111	118	129	137	117	125	136	145	122	130	142	151	128	136	149	158	134	143	156	166	139	148	161	172	
MBh	31.8	32.5	34.0	36.3	31.1	31.7	33.2	35.4	30.4	30.9	32.4	34.6	29.6	30.2	31.6	33.7	28.1	28.7	30.0	32.0	26.1	26.6	27.8	29.7	
S/T	0.89	0.86	0.78	0.63	0.92	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72	
ΔT	27.8	27	26	22	28	28	26	23	28	28	26	23	28	28	26	23	28	27	26	22	25	26	24	21	
kW	1.94	1.99	2.05	2.12	2.10	2.14	2.22	2.29	2.23	2.28	2.36	2.44	2.35	2.41	2.49	2.57	2.46	2.51	2.60	2.69	2.54	2.60	2.69	2.78	
Amps	7.5	7.7	8.0	8.3	8.1	8.3	8.6	8.9	8.8	9.0	9.3	9.7	9.4	9.7	10.0	10.3	10.0	10.3	10.6	11.0	10.6	10.9	11.2	11.7	
HiPR	203	218	230	240	227	245	258	269	258	278	294	306	294	317	335	349	331	356	376	393	366	394	416	434	
LoPR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	139	151	161	135	143	156	167	

kW = Total system power
Amps = outdoor unit amps (comp. + fan)

Shaded area is AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — DSZC160481A* / CA*F4961*6** + TXV / MBVC2000** -1 HIGH STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	46.5	48.2	52.9	-	45.5	47.1	51.6	-	44.4	46.0	50.4	-	43.3	44.9	49.2	-	41.1	42.6	46.7	-	38.1	39.5	43.3	-
	S/T	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	15	11	-
	kW	2.82	2.88	2.98	-	3.04	3.11	3.21	-	3.24	3.31	3.42	-	3.41	3.48	3.60	-	3.55	3.63	3.75	-	3.68	3.76	3.89	-
	Amps	5.8	6.0	6.4	-	6.6	6.9	7.3	-	7.6	7.9	8.3	-	8.5	8.8	9.3	-	9.3	9.7	10.2	-	10.2	10.5	11.1	-
	Hi PR	212	228	241	-	238	256	270	-	270	291	307	-	308	331	350	-	346	373	393	-	382	412	435	-
	Lo PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	133	142	155	-
	MBh	45.2	46.8	51.3	-	44.1	45.7	50.1	-	43.1	44.7	48.9	-	42.0	43.6	47.7	-	39.9	41.4	45.4	-	37.0	38.3	42.0	-
	S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-
	ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-
kW	2.80	2.86	2.95	-	3.02	3.08	3.18	-	3.21	3.28	3.39	-	3.38	3.45	3.57	-	3.52	3.60	3.72	-	3.65	3.73	3.86	-	
Amps	5.7	5.9	6.3	-	6.5	6.8	7.2	-	7.5	7.8	8.2	-	8.4	8.7	9.1	-	9.2	9.5	10.0	-	10.0	10.4	10.9	-	
Hi PR	210	226	238	-	235	253	267	-	267	288	304	-	305	328	346	-	343	369	389	-	379	408	430	-	
Lo PR	106	112	123	-	112	119	130	-	116	123	135	-	122	130	142	-	128	136	148	-	132	141	153	-	
MBh	41.7	43.2	47.4	-	40.7	42.2	46.3	-	39.8	41.2	45.2	-	38.8	40.2	44.1	-	36.9	38.2	41.9	-	34.1	35.4	38.8	-	
S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	
ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-	
kW	2.73	2.79	2.88	-	2.94	3.01	3.10	-	3.13	3.20	3.30	-	3.29	3.37	3.48	-	3.43	3.51	3.63	-	3.55	3.63	3.76	-	
Amps	5.4	5.6	6.0	-	6.2	6.5	6.9	-	7.2	7.5	7.9	-	8.0	8.3	8.7	-	8.8	9.1	9.6	-	9.6	10.0	10.5	-	
Hi PR	203	219	231	-	228	245	259	-	259	279	295	-	296	318	336	-	332	358	378	-	367	395	417	-	
Lo PR	102	109	119	-	108	115	126	-	113	120	131	-	118	126	137	-	124	132	144	-	128	136	149	-	

75	MBh	47.3	48.7	52.8	56.6	46.2	47.6	51.5	55.3	45.1	46.5	50.3	54.0	44.0	45.3	49.1	52.7	41.8	43.1	46.6	50.0	38.7	39.9	43.2	46.3
	S/T	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.89	0.67	0.43
	ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15	11
	kW	2.85	2.91	3.00	3.10	3.07	3.14	3.24	3.34	3.26	3.34	3.45	3.56	3.44	3.51	3.63	3.75	3.58	3.66	3.79	3.92	3.71	3.79	3.92	4.06
	Amps	5.9	6.1	6.5	6.9	6.7	7.0	7.4	7.9	7.7	8.0	8.5	9.0	8.6	8.9	9.4	9.9	9.5	9.8	10.3	10.9	10.3	10.7	11.2	11.8
	Hi PR	214	230	243	253	240	258	273	284	273	294	310	323	311	334	353	368	350	376	397	414	386	416	439	458
	Lo PR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	139	151	161	135	143	157	167
	MBh	46.0	47.3	51.2	55.0	44.9	46.2	50.0	53.7	43.8	45.1	48.8	52.4	42.8	44.0	47.6	51.1	40.6	41.8	45.3	48.6	37.6	38.7	41.9	45.0
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.94	0.84	0.64	0.41
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11
kW	2.82	2.88	2.98	3.07	3.04	3.11	3.21	3.32	3.24	3.31	3.42	3.53	3.41	3.48	3.60	3.72	3.55	3.63	3.75	3.88	3.68	3.76	3.89	4.02	
Amps	5.8	6.0	6.4	6.8	6.6	6.9	7.3	7.7	7.6	7.9	8.3	8.8	8.5	8.8	9.3	9.8	9.3	9.7	10.2	10.7	10.2	10.5	11.1	11.7	
Hi PR	212	228	241	251	238	256	270	282	270	291	307	320	308	331	350	365	346	373	393	410	383	412	435	453	
Lo PR	107	114	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	160	133	142	155	165	
MBh	42.4	43.7	47.3	50.7	41.4	42.7	46.2	49.6	40.4	41.6	45.1	48.4	39.5	40.6	44.0	47.2	37.5	38.6	41.8	44.8	34.7	35.8	38.7	41.5	
S/T	0.79	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.81	0.62	0.40	
ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11	
kW	2.76	2.81	2.90	3.00	2.97	3.03	3.13	3.23	3.16	3.23	3.33	3.44	3.32	3.40	3.51	3.63	3.46	3.54	3.66	3.78	3.59	3.67	3.79	3.92	
Amps	5.5	5.7	6.1	6.5	6.3	6.6	7.0	7.4	7.3	7.6	8.0	8.5	8.1	8.4	8.9	9.4	8.9	9.3	9.8	10.3	9.8	10.1	10.6	11.2	
Hi PR	205	221	233	243	230	248	262	273	262	282	298	311	299	321	339	354	336	361	382	398	371	399	422	440	
Lo PR	104	110	120	128	109	116	127	135	114	121	132	141	119	127	139	148	125	133	145	155	129	138	150	160	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TV) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.-fan)

EXPANDED COOLING DATA — DSZC160481A* / CA*F4961*6** + TXV / MBVC2000*-1 HIGH STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	48.2	49.2	52.6	56.2	47.1	48.1	51.4	54.9	45.9	46.9	50.1	53.6	44.8	45.8	48.9	52.3	42.6	43.5	46.5	49.7	39.4	40.3	43.1	46.0
	S/T	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62
	ΔT	24	23	20	16	25	23	20	16	24	24	23	20	24	24	20	16	22	23	20	16	21	21	19	15
	kW	2.87	2.93	3.03	3.12	3.09	3.16	3.26	3.37	3.29	3.36	3.48	3.59	3.47	3.54	3.66	3.79	3.61	3.70	3.82	3.95	3.74	3.83	3.96	4.09
	Amps	6.0	6.2	6.6	7.0	6.8	7.1	7.5	8.0	7.9	8.2	8.6	9.1	8.7	9.1	9.5	10.1	9.6	10.0	10.4	11.0	10.5	10.8	11.4	12.0
	Hi PR	216	232	245	256	242	261	275	287	276	297	313	327	314	338	357	372	353	380	401	419	390	420	443	463
	Lo PR	109	116	126	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	168
	MBh	46.8	47.8	51.1	54.6	45.7	46.7	49.9	53.3	44.6	45.6	48.7	52.0	43.5	44.5	47.5	50.8	41.3	42.2	45.1	48.2	38.3	39.1	41.8	44.7
	S/T	0.90	0.85	0.69	0.51	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.56	1.00	0.96	0.78	0.59	1.00	0.97	0.79	0.59
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	26	24	21	17	25	24	21	17	23	23	20	16
kW	2.85	2.91	3.00	3.10	3.07	3.14	3.24	3.34	3.26	3.34	3.45	3.56	3.44	3.51	3.63	3.75	3.58	3.66	3.79	3.92	3.71	3.79	3.92	4.06	
Amps	5.9	6.1	6.5	6.9	6.7	7.0	7.4	7.9	7.7	8.0	8.5	9.0	8.6	8.9	9.4	9.9	9.5	9.8	10.3	10.9	10.3	10.7	11.2	11.8	
Hi PR	214	230	243	253	240	258	273	284	273	294	310	323	311	335	353	368	350	376	397	414	386	416	439	458	
Lo PR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	139	151	161	135	143	157	167	
MBh	43.2	44.1	47.1	50.4	42.2	43.1	46.0	49.2	41.2	42.1	44.9	48.0	40.2	41.0	43.8	46.9	38.2	39.0	41.7	44.5	35.3	36.1	38.6	41.2	
S/T	0.87	0.82	0.66	0.50	0.90	0.85	0.69	0.51	0.92	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.99	0.93	0.76	0.57	1.00	0.94	0.76	0.57	
ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	26	25	21	17	24	23	20	16	
kW	2.78	2.84	2.93	3.02	2.99	3.06	3.16	3.26	3.18	3.25	3.36	3.47	3.35	3.43	3.54	3.66	3.49	3.57	3.69	3.82	3.62	3.70	3.82	3.95	
Amps	5.6	5.8	6.2	6.6	6.4	6.7	7.1	7.5	7.4	7.7	8.1	8.6	8.2	8.6	9.0	9.5	9.1	9.4	9.9	10.4	9.9	10.3	10.8	11.4	
Hi PR	207	223	236	246	233	251	265	276	265	285	301	314	302	324	343	357	339	365	385	402	375	403	426	444	
Lo PR	105	111	121	129	110	118	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162	

85	MBh	49.0	50.0	52.3	55.8	47.9	48.8	51.1	54.5	46.7	47.6	49.9	53.2	45.6	46.5	48.7	51.9	43.3	44.2	46.2	49.3	40.1	40.9	42.8	45.7
	S/T	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80
	ΔT	26	25	24	21	25	26	24	21	25	25	24	21	24	25	24	21	23	23	24	21	21	21	22	19
	kW	2.89	2.96	3.05	3.15	3.12	3.19	3.29	3.40	3.32	3.39	3.50	3.62	3.49	3.57	3.69	3.82	3.64	3.73	3.85	3.98	3.77	3.86	3.99	4.13
	Amps	6.1	6.3	6.7	7.1	7.0	7.2	7.6	8.1	8.0	8.3	8.7	9.2	8.9	9.2	9.7	10.2	9.7	10.1	10.6	11.2	10.6	11.0	11.5	12.1
	Hi PR	218	235	248	259	245	263	278	290	278	300	316	330	317	341	360	376	357	384	405	423	394	424	448	467
	Lo PR	110	117	128	136	116	124	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	160	170
	MBh	47.6	48.5	50.8	54.2	46.5	47.4	49.6	52.9	45.4	46.3	48.4	51.7	44.3	45.1	47.3	50.4	42.1	42.9	44.9	47.9	39.0	39.7	41.6	44.4
	S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77
	ΔT	27	26	25	21	27	27	25	22	27	27	25	22	26	27	25	22	26	25	25	22	23	24	23	20
kW	2.87	2.93	3.03	3.12	3.09	3.16	3.26	3.37	3.29	3.36	3.48	3.59	3.47	3.54	3.66	3.79	3.61	3.70	3.82	3.95	3.74	3.83	3.96	4.09	
Amps	6.0	6.2	6.6	7.0	6.8	7.1	7.5	8.0	7.9	8.2	8.6	9.1	8.7	9.1	9.5	10.1	9.6	10.0	10.4	11.0	10.5	10.8	11.4	12.0	
Hi PR	216	232	245	256	242	261	275	287	276	297	313	327	314	338	357	372	353	380	401	419	390	420	443	463	
Lo PR	109	116	126	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	168	
MBh	43.9	44.8	46.9	50.0	42.9	43.7	45.8	48.9	41.9	42.7	44.7	47.7	40.9	41.7	43.6	46.5	38.8	39.6	41.4	44.2	36.0	36.7	38.4	41.0	
S/T	0.91	0.88	0.79	0.64	0.95	0.91	0.82	0.67	0.97	0.94	0.84	0.68	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74	
ΔT	27	27	25	22	27	27	26	22	28	27	26	22	28	27	26	22	26	27	25	22	24	25	24	21	
kW	2.80	2.86	2.95	3.05	3.02	3.08	3.18	3.29	3.21	3.28	3.39	3.50	3.38	3.45	3.57	3.69	3.52	3.60	3.72	3.85	3.65	3.73	3.85	3.99	
Amps	5.7	5.9	6.3	6.7	6.5	6.8	7.2	7.6	7.5	7.8	8.2	8.7	8.4	8.7	9.1	9.7	9.2	9.5	10.0	10.6	10.0	10.4	10.9	11.5	
Hi PR	210	225	238	248	235	253	267	279	267	288	304	317	305	328	346	361	343	369	389	406	379	407	430	449	
Lo PR	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DSZC160601A* / CA*F4961*6** + TXV / MBVC2000** -1 Low Stage

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	MBh	39.8	41.3	45.2	-	38.9	40.3	44.2	-	38.0	39.4	43.1	-	37.0	38.4	42.1	-	35.2	36.5	40.0	-	32.6	33.8	37.0	-	
	S/T	0.72	0.61	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	
	1350	kW	2.45	2.51	2.59	-	2.65	2.71	2.80	-	2.83	2.89	2.99	-	2.98	3.05	3.16	-	3.12	3.19	3.30	-	3.23	3.31	3.42	-
	Amps	9.5	9.7	10.0	-	10.2	10.5	10.8	-	11.1	11.4	11.8	-	11.9	12.2	12.6	-	12.7	13.0	13.4	-	13.4	13.8	14.2	-	
	Hi PR	207	222	235	-	232	250	264	-	264	284	300	-	301	323	341	-	338	364	384	-	374	402	424	-	
	Lo PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	139	-	126	134	146	-	130	138	151	-	
	MBh	38.7	40.1	43.9	-	37.8	39.1	42.9	-	36.9	38.2	41.9	-	36.0	37.3	40.8	-	34.2	35.4	38.8	-	31.6	32.8	35.9	-	
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-	
	ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-	
1200	kW	2.43	2.48	2.57	-	2.63	2.69	2.78	-	2.80	2.87	2.97	-	2.96	3.03	3.13	-	3.09	3.16	3.27	-	3.20	3.28	3.39	-	
	Amps	9.4	9.6	9.9	-	10.1	10.4	10.7	-	11.0	11.3	11.7	-	11.8	12.1	12.5	-	12.6	12.9	13.3	-	13.3	13.6	14.1	-	
	Hi PR	205	220	233	-	230	247	261	-	261	281	297	-	298	320	338	-	335	360	380	-	370	398	420	-	
	Lo PR	103	110	120	-	109	116	126	-	113	120	131	-	119	126	138	-	125	133	145	-	129	137	150	-	
	MBh	35.7	37.0	40.5	-	34.9	36.1	39.6	-	34.0	35.3	38.6	-	33.2	34.4	37.7	-	31.5	32.7	35.8	-	29.2	30.3	33.2	-	
	S/T	0.67	0.56	0.39	-	0.69	0.58	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.76	0.64	0.44	-	
	ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	20	17	13	-	
	1050	kW	2.37	2.42	2.50	-	2.56	2.62	2.71	-	2.73	2.79	2.89	-	2.88	2.95	3.05	-	3.01	3.08	3.18	-	3.12	3.19	3.30	-
		Amps	9.1	9.3	9.6	-	9.9	10.1	10.4	-	10.7	11.0	11.3	-	11.5	11.7	12.1	-	12.2	12.5	12.9	-	12.9	13.3	13.7	-
		Hi PR	199	214	226	-	223	240	253	-	253	273	288	-	289	311	328	-	325	349	369	-	359	386	408	-
Lo PR		100	106	116	-	106	112	123	-	110	117	127	-	115	123	134	-	121	129	140	-	125	133	145	-	

1350	MBh	40.5	41.7	45.1	48.4	39.6	40.7	44.1	47.3	38.6	39.8	43.0	46.2	37.7	38.8	42.0	45.1	35.8	36.8	39.9	42.8	33.2	34.1	36.9	39.7	
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.95	0.85	0.64	0.41	
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11	
	1200	kW	2.47	2.53	2.61	2.70	2.67	2.74	2.83	2.93	2.85	2.92	3.02	3.12	3.01	3.08	3.19	3.30	3.14	3.22	3.33	3.45	3.26	3.34	3.45	3.58
		Amps	9.6	9.8	10.1	10.5	10.3	10.6	10.9	11.3	11.2	11.5	11.9	12.3	12.0	12.3	12.7	13.2	12.8	13.1	13.5	14.1	13.6	13.9	14.4	14.9
		Hi PR	209	225	237	248	234	252	266	278	267	287	303	316	304	327	345	360	342	368	388	405	377	406	429	447
		Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163
		MBh	39.3	40.5	43.8	47.0	38.4	39.5	42.8	45.9	37.5	38.6	41.8	44.8	36.6	37.7	40.8	43.7	34.7	35.8	38.7	41.6	32.2	33.1	35.9	38.5
		S/T	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.90	0.81	0.61	0.39
		ΔT	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	13	24	22	18	12	22	20	17	12
1050		kW	2.45	2.51	2.59	2.68	2.65	2.71	2.80	2.90	2.83	2.89	2.99	3.10	2.98	3.05	3.16	3.27	3.12	3.19	3.30	3.42	3.23	3.31	3.42	3.54
		Amps	9.5	9.7	10.0	10.4	10.2	10.5	10.8	11.2	11.1	11.4	11.8	12.2	11.9	12.2	12.6	13.1	12.7	13.0	13.4	13.9	13.4	13.8	14.2	14.8
		Hi PR	207	223	235	245	232	250	264	275	264	284	300	313	301	323	342	356	338	364	384	401	374	402	425	443
	Lo PR	104	111	121	129	110	117	128	136	114	122	133	141	120	128	139	149	126	134	146	156	130	138	151	161	
	MBh	36.3	37.4	40.4	43.4	35.4	36.5	39.5	42.4	34.6	35.6	38.6	41.4	33.8	34.8	37.6	40.4	32.1	33.0	35.7	38.4	29.7	30.6	33.1	35.5	
	S/T	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.87	0.78	0.59	0.38	
	ΔT	24	22	18	13	24	22	18	13	24	22	18	13	25	23	19	13	25	23	18	13	23	21	17	12	
	1050	kW	2.39	2.44	2.52	2.61	2.58	2.64	2.73	2.83	2.75	2.82	2.91	3.02	2.91	2.97	3.08	3.18	3.03	3.11	3.21	3.33	3.15	3.22	3.33	3.45
		Amps	9.2	9.4	9.7	10.1	10.0	10.2	10.5	10.9	10.8	11.1	11.5	11.9	11.6	11.9	12.3	12.7	12.3	12.6	13.0	13.5	13.1	13.4	13.8	14.4
		Hi PR	201	216	228	238	225	242	256	267	256	275	291	303	292	314	331	346	328	353	373	389	362	390	412	430
Lo PR		101	107	117	125	107	113	124	132	111	118	129	137	116	124	135	144	122	130	142	151	126	134	147	156	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — DSZC160601A* / CA*F4961*6** + TXV / MBVC2000** -1 Low Stage (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	41.2	42.1	45.0	48.1	40.3	41.1	44.0	47.0	39.3	40.2	42.9	45.9	38.3	39.2	41.9	44.7	36.4	37.2	39.8	42.5	33.7	34.5	36.8	39.4
	S/T	0.90	0.85	0.69	0.52	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.79	0.59	1.00	1.00	0.79	0.59
	ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	25	24	21	17	23	23	20	16
	kW	2.49	2.55	2.63	2.72	2.70	2.76	2.85	2.95	2.88	2.94	3.05	3.15	3.04	3.11	3.22	3.33	3.17	3.25	3.36	3.48	3.29	3.37	3.48	3.61
	Amps	9.6	9.9	10.2	10.6	10.4	10.7	11.0	11.4	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.9	13.2	13.7	14.2	13.7	14.0	14.5	15.1
	Hi PR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	348	363	345	371	392	409	381	410	433	452
	Lo PR	106	113	123	131	112	119	130	139	117	124	135	144	122	130	142	152	128	137	149	159	133	141	154	164
	MBh	40.0	40.9	43.7	46.7	39.1	39.9	42.7	45.6	38.2	39.0	41.7	44.5	37.2	38.0	40.6	43.4	35.4	36.1	38.6	41.3	32.8	33.5	35.8	38.2
	S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56
	ΔT	26	25	22	18	27	26	22	18	27	26	22	18	27	26	22	18	27	25	22	18	25	24	21	17
kW	2.47	2.53	2.61	2.70	2.67	2.74	2.83	2.93	2.85	2.92	3.02	3.12	3.01	3.08	3.19	3.30	3.14	3.22	3.33	3.45	3.26	3.34	3.45	3.58	
Amps	9.6	9.8	10.1	10.5	10.3	10.6	10.9	11.3	11.2	11.5	11.9	12.3	12.0	12.3	12.7	13.2	12.8	13.1	13.5	14.1	13.6	13.9	14.4	14.9	
Hi PR	209	225	237	248	234	252	266	278	267	287	303	316	304	327	345	360	342	368	388	405	377	406	429	447	
Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163	
MBh	36.9	37.7	40.3	43.1	36.1	36.9	39.4	42.1	35.2	36.0	38.4	41.1	34.4	35.1	37.5	40.1	32.6	33.4	35.6	38.1	30.2	30.9	33.0	35.3	
S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54	
ΔT	27	26	22	18	27	26	23	18	27	26	23	18	27	26	23	18	27	26	23	18	25	24	21	17	
kW	2.41	2.46	2.55	2.63	2.61	2.66	2.75	2.85	2.78	2.84	2.94	3.04	2.93	3.00	3.10	3.21	3.06	3.13	3.24	3.36	3.17	3.25	3.36	3.48	
Amps	9.3	9.5	9.8	10.2	10.0	10.3	10.6	11.0	10.9	11.2	11.6	12.0	11.7	12.0	12.4	12.8	12.4	12.7	13.2	13.7	13.2	13.5	14.0	14.5	
Hi PR	203	218	230	240	227	245	258	269	259	278	294	306	294	317	335	349	331	357	376	393	366	394	416	434	
Lo PR	102	109	118	126	108	115	125	133	112	119	130	139	118	125	137	146	123	131	143	152	128	136	148	158	

85	MBh	41.9	42.7	44.8	47.8	41.0	41.8	43.7	46.7	40.0	40.8	42.7	45.5	39.0	39.8	41.6	44.4	37.1	37.8	39.6	42.2	34.3	35.0	36.7	39.1
	S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77
	ΔT	27	27	25	22	27	27	25	22	27	27	25	22	27	27	26	22	25	26	25	22	23	24	24	20
	kW	2.51	2.57	2.66	2.75	2.72	2.78	2.88	2.98	2.90	2.97	3.07	3.18	3.06	3.13	3.24	3.36	3.20	3.27	3.39	3.51	3.32	3.40	3.51	3.64
	Amps	9.7	10.0	10.3	10.7	10.5	10.8	11.1	11.6	11.4	11.7	12.1	12.6	12.2	12.5	13.0	13.5	13.0	13.4	13.8	14.3	13.8	14.2	14.6	15.2
	Hi PR	213	229	242	253	239	257	272	283	272	293	309	322	310	333	352	367	348	375	396	413	385	414	437	456
	Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	160	134	143	156	166
	MBh	40.7	41.5	43.5	46.4	39.8	40.5	42.5	45.3	38.8	39.6	41.4	44.2	37.9	38.6	40.4	43.1	36.0	36.7	38.4	41.0	33.3	34.0	35.6	38.0
	S/T	0.90	0.87	0.79	0.64	0.94	0.90	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.90	0.73
	ΔT	28	28	26	23	29	28	27	23	29	28	27	23	29	28	27	23	28	28	26	23	26	26	25	21
kW	2.49	2.55	2.63	2.72	2.70	2.76	2.85	2.95	2.88	2.94	3.05	3.15	3.04	3.11	3.22	3.33	3.17	3.25	3.36	3.48	3.29	3.37	3.48	3.61	
Amps	9.6	9.9	10.2	10.6	10.4	10.7	11.0	11.4	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.9	13.2	13.7	14.2	13.7	14.0	14.5	15.1	
Hi PR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	348	363	345	371	392	409	381	410	433	452	
Lo PR	106	113	123	131	112	119	130	139	117	124	135	144	122	130	142	152	128	137	149	159	133	141	154	164	
MBh	37.6	38.3	40.1	42.8	36.7	37.4	39.2	41.8	35.8	36.5	38.3	40.8	35.0	35.6	37.3	39.8	33.2	33.9	35.5	37.8	30.8	31.4	32.8	35.0	
S/T	0.87	0.84	0.76	0.62	0.90	0.87	0.79	0.64	0.93	0.89	0.81	0.65	0.96	0.92	0.83	0.67	0.99	0.96	0.86	0.70	1.00	0.96	0.87	0.71	
ΔT	28.7	28	27	23	29	29	27	23	29	29	27	23	29	29	27	23	29	28	27	23	27	26	25	22	
kW	2.43	2.48	2.57	2.65	2.63	2.69	2.78	2.87	2.80	2.87	2.97	3.07	2.96	3.03	3.13	3.24	3.09	3.16	3.27	3.39	3.20	3.28	3.39	3.51	
Amps	9.4	9.6	9.9	10.3	10.1	10.4	10.7	11.1	11.0	11.3	11.7	12.1	11.8	12.1	12.5	13.0	12.5	12.9	13.3	13.8	13.3	13.6	14.1	14.6	
Hi PR	205	220	233	243	230	247	261	272	261	281	297	310	297	320	338	353	335	360	380	397	370	398	420	438	
Lo PR	103	110	120	127	109	116	126	135	113	120	131	140	119	126	138	147	125	132	145	154	129	137	150	159	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — DSZC160601A* / CA*F4961*6** + TXV / MBVC2000** -1 HIGH STAGE

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	55.9	57.9	63.4	-	54.6	56.5	62.0	-	53.3	55.2	60.5	-	52.0	53.9	59.0	-	49.4	51.2	56.1	-	45.7	47.4	51.9	-
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
	ΔT	19	16	12	-	19	16	13	-	19	16	13	-	19	17	13	-	19	16	12	-	18	15	12	-
	kW	3.57	3.65	3.77	-	3.85	3.94	4.07	-	4.10	4.20	4.34	-	4.32	4.42	4.57	-	4.51	4.61	4.77	-	4.67	4.78	4.94	-
	Amps	13.1	13.4	13.9	-	14.2	14.6	15.1	-	15.5	15.9	16.4	-	16.6	17.0	17.6	-	17.7	18.1	18.7	-	18.7	19.2	19.9	-
	Hi PR	214	230	243	-	240	258	273	-	273	294	310	-	311	334	353	-	350	376	397	-	386	416	439	-
	Lo PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	146	-
	MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-
	S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.81	0.68	0.47	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-
kW	3.54	3.62	3.74	-	3.82	3.91	4.04	-	4.07	4.16	4.30	-	4.29	4.38	4.53	-	4.47	4.58	4.73	-	4.63	4.74	4.90	-	
Amps	13.0	13.3	13.8	-	14.1	14.4	14.9	-	15.3	15.7	16.3	-	16.4	16.8	17.4	-	17.5	17.9	18.6	-	18.6	19.0	19.7	-	
Hi PR	212	228	241	-	238	256	270	-	270	291	307	-	308	331	350	-	346	373	393	-	382	412	435	-	
Lo PR	100	106	116	-	106	112	123	-	110	117	127	-	115	123	134	-	121	128	140	-	125	133	145	-	
MBh	50.1	51.9	56.8	-	48.9	50.7	55.5	-	47.7	49.5	54.2	-	46.6	48.3	52.9	-	44.2	45.8	50.2	-	41.0	42.5	46.5	-	
S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-	
ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-	
kW	3.46	3.53	3.64	-	3.73	3.81	3.93	-	3.97	4.06	4.19	-	4.18	4.27	4.42	-	4.36	4.46	4.61	-	4.51	4.62	4.77	-	
Amps	12.6	13.0	13.4	-	13.7	14.0	14.5	-	14.9	15.3	15.8	-	16.0	16.4	16.9	-	17.0	17.4	18.0	-	18.0	18.5	19.1	-	
Hi PR	205	221	233	-	230	248	262	-	262	282	298	-	298	321	339	-	336	361	382	-	371	399	422	-	
Lo PR	97	103	112	-	102	109	119	-	106	113	124	-	112	119	130	-	117	125	136	-	121	129	141	-	

75	MBh	56.8	58.5	63.3	67.9	55.5	57.1	61.8	66.4	54.2	55.8	60.4	64.8	52.8	54.4	58.9	63.2	50.2	51.7	55.9	60.0	46.5	47.9	51.8	55.6
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.65	0.42
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
	kW	3.60	3.68	3.80	3.93	3.89	3.97	4.10	4.24	4.14	4.23	4.37	4.52	4.36	4.46	4.61	4.77	4.55	4.65	4.81	4.98	4.71	4.82	4.99	5.16
	Amps	13.2	13.6	14.0	14.6	14.4	14.7	15.2	15.8	15.6	16.0	16.6	17.2	16.7	17.2	17.7	18.4	17.8	18.3	18.9	19.7	18.9	19.4	20.1	20.9
	Hi PR	216	232	245	256	242	261	275	287	276	297	313	327	314	338	357	372	353	380	401	419	390	420	443	463
	Lo PR	102	108	118	126	108	115	125	133	112	119	130	138	118	125	136	145	123	131	143	152	127	136	148	158
	MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0
	S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.83	0.62	0.40
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11
kW	3.57	3.65	3.77	3.89	3.85	3.94	4.07	4.21	4.10	4.20	4.34	4.48	4.32	4.42	4.57	4.73	4.51	4.62	4.77	4.94	4.67	4.78	4.94	5.12	
Amps	13.1	13.5	13.9	14.4	14.2	14.6	15.1	15.6	15.5	15.9	16.4	17.0	16.6	17.0	17.6	18.3	17.7	18.1	18.7	19.5	18.8	19.2	19.9	20.7	
Hi PR	214	230	243	253	240	258	273	284	273	294	310	323	311	335	353	368	350	376	397	414	386	416	439	458	
Lo PR	101	107	117	125	107	113	124	132	111	118	129	137	116	124	135	144	122	130	142	151	126	134	146	156	
MBh	50.9	52.4	56.7	60.9	49.7	51.2	55.4	59.5	48.5	50.0	54.1	58.1	47.3	48.8	52.8	56.6	45.0	46.3	50.1	53.8	41.7	42.9	46.4	49.8	
S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.89	0.80	0.60	0.39	
ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11	
kW	3.48	3.56	3.67	3.80	3.76	3.84	3.97	4.10	4.00	4.09	4.23	4.37	4.21	4.31	4.45	4.61	4.40	4.50	4.65	4.81	4.55	4.66	4.82	4.98	
Amps	12.8	13.1	13.5	14.0	13.8	14.2	14.6	15.2	15.1	15.4	16.0	16.6	16.1	16.5	17.1	17.7	17.2	17.6	18.2	18.9	18.2	18.7	19.3	20.1	
Hi PR	207	223	236	246	233	250	265	276	265	285	301	314	302	324	343	357	339	365	385	402	375	403	426	444	
Lo PR	98	104	114	121	103	110	120	128	107	114	125	133	113	120	131	140	118	126	137	146	122	130	142	151	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DSZC160601A* / CA*F4961*6** + TXV / MBVC2000** -1 HIGH STAGE (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	2025	MBh	57.8	59.1	63.1	67.5	56.5	57.7	61.6	65.9	55.1	56.3	60.2	64.3	53.8	55.0	58.7	62.8	51.1	52.2	55.8	59.6	47.3	48.4	51.7	55.2	
		S/T	0.92	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.81	0.61	
	1800	ΔT	24	23	20	16	25	24	20	16	25	24	20	16	24	24	21	16	23	24	21	16	21	22	19	15	
		kW	3.63	3.71	3.83	3.96	3.92	4.01	4.14	4.28	4.17	4.27	4.41	4.56	4.40	4.50	4.65	4.81	4.59	4.70	4.86	5.02	4.76	4.86	5.03	5.21	
	1575	Amps	13.4	13.7	14.2	14.7	14.5	14.8	15.4	15.9	15.8	16.2	16.7	17.4	16.9	17.3	17.9	18.6	18.0	18.5	19.1	19.8	19.1	19.6	20.3	21.1	
		Hi PR	218	235	248	259	245	263	278	290	278	300	316	330	317	341	360	376	357	384	405	423	394	424	448	467	
	85	2025	Lo PR	103	109	120	127	109	116	126	134	113	120	131	140	119	126	138	147	124	132	144	154	129	137	149	159
			MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6
		1800	S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58
			ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	21	17	25	24	21	17	23	23	20	16
1575		kW	3.60	3.68	3.80	3.93	3.89	3.97	4.10	4.24	4.14	4.23	4.37	4.52	4.36	4.46	4.61	4.77	4.55	4.66	4.81	4.98	4.71	4.82	4.99	5.16	
		Amps	13.3	13.6	14.0	14.6	14.4	14.7	15.2	15.8	15.6	16.0	16.6	17.2	16.7	17.2	17.7	18.4	17.8	18.3	18.9	19.7	18.9	19.4	20.1	20.9	
85		2025	Hi PR	216	232	245	256	242	261	275	287	276	297	313	327	314	338	357	372	353	380	401	419	390	420	444	463
			Lo PR	102	108	118	126	108	115	125	133	112	119	130	138	118	125	137	145	123	131	143	152	127	136	148	158
		1800	MBh	51.8	52.9	56.6	60.5	50.6	51.7	55.2	59.1	49.4	50.5	53.9	57.6	48.2	49.2	52.6	56.2	45.8	46.8	50.0	53.4	42.4	43.3	46.3	49.5
			S/T	0.85	0.80	0.65	0.48	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.91	0.74	0.56
	1575	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	22	17	24	23	20	16	
		kW	3.51	3.59	3.71	3.83	3.79	3.87	4.00	4.14	4.03	4.13	4.26	4.41	4.25	4.35	4.49	4.65	4.43	4.54	4.69	4.85	4.59	4.70	4.86	5.03	
	85	2025	Amps	12.9	13.2	13.6	14.2	14.0	14.3	14.8	15.3	15.2	15.6	16.1	16.7	16.3	16.7	17.2	17.9	17.3	17.8	18.4	19.1	18.4	18.9	19.5	20.3
			Hi PR	210	225	238	248	235	253	267	279	267	288	304	317	305	328	346	361	343	369	389	406	379	407	430	449
		1800	Lo PR	99	105	115	122	104	111	121	129	109	115	126	134	114	121	132	141	119	127	139	148	124	131	144	153
			MBh	58.8	60.0	62.8	67.0	57.5	58.6	61.3	65.4	56.1	57.2	59.9	63.9	54.7	55.8	58.4	62.3	52.0	53.0	55.5	59.2	48.2	49.1	51.4	54.8
1575		S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79	
		ΔT	26	25	24	21	26	26	24	21	25	26	24	21	25	25	25	21	24	24	24	21	22	22	23	20	
85		2025	kW	3.66	3.74	3.86	3.99	3.95	4.04	4.17	4.31	4.21	4.30	4.45	4.60	4.44	4.54	4.69	4.85	4.63	4.74	4.90	5.07	4.80	4.91	5.07	5.25
			Amps	13.5	13.8	14.3	14.8	14.6	15.0	15.5	16.1	15.9	16.3	16.9	17.5	17.1	17.5	18.1	18.8	18.2	18.6	19.3	20.0	19.3	19.8	20.5	21.3
		1800	Hi PR	220	237	250	261	247	266	281	293	281	303	320	333	320	345	364	380	360	388	409	427	398	428	452	472
			Lo PR	104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161
	1575	MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2	
		S/T	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.86	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75	
	85	2025	ΔT	27	27	25	22	27	27	25	22	27	27	25	22	27	27	26	22	26	26	25	22	24	24	24	20
			kW	3.63	3.71	3.83	3.96	3.92	4.01	4.14	4.28	4.17	4.27	4.41	4.56	4.40	4.50	4.65	4.81	4.59	4.70	4.86	5.02	4.76	4.86	5.03	5.21
		1800	Amps	13.4	13.7	14.2	14.7	14.5	14.8	15.4	15.9	15.8	16.2	16.7	17.4	16.9	17.3	17.9	18.6	18.0	18.5	19.1	19.8	19.1	19.6	20.3	21.1
			Hi PR	218	235	248	259	245	263	278	290	278	300	316	330	317	341	360	376	357	384	405	423	394	424	448	467
1575		Lo PR	103	109	120	127	109	116	126	134	113	120	131	140	119	126	138	147	124	132	144	154	129	137	149	159	
		MBh	52.7	53.7	56.3	60.0	51.5	52.5	55.0	58.6	50.3	51.2	53.7	57.2	49.0	50.0	52.3	55.8	46.6	47.5	49.7	53.1	43.1	44.0	46.1	49.1	
85		2025	S/T	0.89	0.86	0.78	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72
			ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	28	26	23	27	27	26	22	25	25	24	21
		1800	kW	3.54	3.62	3.74	3.86	3.82	3.91	4.03	4.17	4.07	4.16	4.30	4.44	4.29	4.38	4.53	4.69	4.47	4.57	4.73	4.89	4.63	4.74	4.90	5.07
			Amps	13.0	13.3	13.8	14.3	14.1	14.4	14.9	15.5	15.3	15.7	16.3	16.9	16.4	16.8	17.4	18.1	17.5	17.9	18.6	19.3	18.6	19.0	19.7	20.5
	1575	Hi PR	212	228	240	251	237	256	270	281	270	291	307	320	308	331	350	365	346	372	393	410	382	411	434	453	
		Lo PR	100	106	116	123	105	112	122	130	110	117	127	136	115	122	134	142	121	128	140	149	125	133	145	154	

kW = Total system power
Amps = outdoor unit amps (comp. + fan)

Shaded area is AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

EXPANDED HEATING DATA — Low Stage

DSZC160241A* / CA*F3636*6** + TXV / MBVC1600**-1

LOW STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	20.8	19.7	18.5	17.3	16.6	16.0	14.9	13.7	13.1	12.1	11.1	10.5	10.1	9.1	8.1	7.0	6.0	4.9
ΔT	30.2	28.6	26.9	25.2	24.1	23.3	21.7	20.0	19.0	17.6	16.2	15.3	14.7	13.2	11.7	10.2	8.7	7.1
kW	1.42	1.40	1.37	1.34	1.32	1.31	1.28	1.25	1.37	1.33	1.30	1.28	1.27	1.23	1.20	1.17	1.14	1.10
Amps	6.8	6.3	5.9	5.6	5.4	5.3	5.0	4.7	4.5	4.3	4.1	4.0	4.0	3.8	3.5	3.3	3.1	2.8
COP	4.27	4.13	3.97	3.79	3.67	3.59	3.41	3.21	2.81	2.66	2.51	2.40	2.34	2.15	1.96	1.76	1.54	1.30
EER	14.6	14.1	13.6	13.0	12.5	12.3	11.6	11.0	9.6	9.1	8.6	8.2	8.0	7.4	6.7	6.0	5.3	4.5
Hi PR	360	345	331	317	309	304	292	280	268	256	246	240	236	227	218	209	202	195
Lo PR	150	139	130	119	113	109	100	89	80	72	63	59	56	48	41	35	30	24

DSZC160361A* / CA*F3743*6** + TXV / MBVC1600**-1

LOW STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.3	28.7	27.0	25.3	24.1	23.4	21.7	20.0	18.1	16.7	15.4	14.5	14.0	12.6	11.1	9.7	8.3	6.8
ΔT	35.1	33.2	31.3	29.2	27.9	27.1	25.1	23.2	21.0	19.4	17.8	16.8	16.2	14.5	12.9	11.2	9.6	7.9
kW	2.03	1.98	1.94	1.90	1.9	1.86	1.82	1.78	1.93	1.89	1.84	1.81	1.79	1.75	1.70	1.65	1.61	1.56
Amps	9.8	9.1	8.5	8.0	7.8	7.6	7.2	6.8	6.6	6.3	6.0	5.8	5.8	5.5	5.1	4.8	4.5	4.1
COP	4.38	4.23	4.07	3.89	3.76	3.68	3.49	3.29	2.74	2.60	2.45	2.35	2.29	2.11	1.92	1.72	1.51	1.27
EER	15.0	14.5	13.9	13.3	12.8	12.6	11.9	11.3	9.4	8.9	8.4	8.0	7.8	7.2	6.6	5.9	5.2	4.4
Hi PR	379	363	349	334	326	320	307	295	282	270	259	253	248	239	230	220	212	205
Lo PR	149	139	130	119	113	108	100	89	80	72	63	58	56	48	41	35	30	24

DSZC160481A* / CA*F4961*6** +T XV / MBVC2000**-1

LOW STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	43.2	40.9	38.5	36.0	34.4	33.3	30.9	28.5	25.7	23.7	21.8	20.6	19.9	17.8	15.8	13.8	11.8	9.6
ΔT	37.2	35.2	33.1	31.0	29.6	28.7	26.6	24.6	22.1	20.4	18.8	17.8	17.1	15.4	13.6	11.9	10.1	8.3
kW	2.97	2.91	2.85	2.79	2.8	2.72	2.66	2.60	2.71	2.65	2.58	2.54	2.52	2.45	2.38	2.32	2.25	2.18
Amps	14.1	13.1	12.2	11.5	11.1	10.9	10.3	9.7	9.3	8.9	8.5	8.3	8.1	7.7	7.2	6.8	6.3	5.6
COP	4.25	4.11	3.95	3.78	3.66	3.58	3.40	3.21	2.77	2.62	2.48	2.38	2.31	2.13	1.94	1.74	1.53	1.29
EER	14.5	14.0	13.5	12.9	12.5	12.2	11.6	11.0	9.5	9.0	8.5	8.1	7.9	7.3	6.6	5.9	5.2	4.4
Hi PR	411	394	379	362	354	347	334	320	307	293	281	275	270	259	249	239	231	223
Lo PR	145	135	126	116	110	105	97	86	78	70	61	57	55	46	40	34	29	23

DSZC160601A* / CA*F4961*6** + TXV / MBVC2000**-1

LOW STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	52.2	49.5	46.5	43.5	41.6	40.3	37.4	34.5	33.0	30.4	28.0	26.5	25.5	22.9	20.3	17.7	15.1	12.4
ΔT	40.3	38.2	35.9	33.6	32.1	31.1	28.9	26.6	25.4	23.5	21.6	20.4	19.7	17.6	15.6	13.6	11.6	9.5
kW	3.67	3.59	3.51	3.44	3.4	3.36	3.28	3.21	3.42	3.34	3.25	3.20	3.17	3.08	3.00	2.91	2.82	2.74
Amps	17.4	16.1	15.0	14.1	13.6	13.3	12.6	11.9	11.4	10.9	10.3	10.1	9.9	9.4	8.8	8.2	7.6	6.8
COP	4.16	4.03	3.88	3.71	3.59	3.51	3.33	3.15	2.82	2.67	2.52	2.42	2.35	2.17	1.98	1.78	1.56	1.32
EER	14.2	13.8	13.2	12.7	12.3	12.0	11.4	10.8	9.6	9.1	8.6	8.3	8.0	7.4	6.8	6.1	5.3	4.5
Hi PR	402	385	371	354	346	339	326	313	300	286	275	268	264	254	244	234	226	218
Lo PR	141	131	123	113	107	103	94	84	76	68	59	55	53	45	39	33	29	22

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Amps = Outdoor unit amps (comp.+fan)

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

kW = Total system power

Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

EXPANDED HEATING DATA — HIGH STAGE

DSZC160241A* / CA*F3636*6** + TXV / MBVC1600**-1

HIGH STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.2	28.6	26.9	25.1	24.0	23.3	21.6	19.9	18.7	17.3	15.9	15.0	14.4	13.0	11.5	10.0	8.6	7.0
ΔT	31.9	30.2	28.4	26.6	25.4	24.6	22.9	21.1	19.8	18.3	16.8	15.9	15.3	13.7	12.2	10.6	9.0	7.4
kW	1.86	1.83	1.79	1.75	1.7	1.71	1.68	1.64	1.72	1.68	1.64	1.61	1.60	1.56	1.52	1.48	1.44	1.40
Amps	8.7	8.0	7.5	7.1	6.8	6.7	6.3	6.0	5.7	5.5	5.2	5.1	5.0	4.8	4.5	4.2	3.9	3.5
COP	4.74	4.58	4.40	4.20	4.06	3.97	3.77	3.55	3.18	3.01	2.84	2.72	2.65	2.44	2.22	1.99	1.74	1.47
EER	16.2	15.6	15.0	14.3	13.9	13.6	12.9	12.1	10.9	10.3	9.7	9.3	9.0	8.3	7.6	6.8	6.0	5.0
Hi PR	359	344	331	316	309	303	291	279	268	256	245	240	235	226	218	209	201	194
Lo PR	145	134	126	116	109	105	97	86	78	69	61	57	55	46	40	34	29	23

DSZC160361A* / CA*F3743*6** + TXV / MBVC1600**-1

HIGH STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	43.2	40.9	38.5	36.0	34.4	33.3	31.0	28.6	26.2	24.2	22.2	21.0	20.2	18.1	16.1	14.0	12.0	9.8
ΔT	34.8	33.0	31.0	29.0	27.7	26.8	24.9	23.0	21.1	19.4	17.9	16.9	16.3	14.6	13.0	11.3	9.6	7.9
kW	2.80	2.74	2.69	2.63	2.6	2.57	2.52	2.46	2.39	2.33	2.28	2.24	2.22	2.16	2.11	2.05	2.00	1.94
Amps	13.1	12.1	11.4	10.7	10.3	10.1	9.5	9.1	8.7	8.3	7.9	7.7	7.6	7.2	6.7	6.4	5.9	5.3
COP	4.52	4.37	4.20	4.01	3.88	3.79	3.60	3.40	3.21	3.03	2.86	2.74	2.66	2.45	2.23	2.00	1.75	1.48
EER	15.4	14.9	14.3	13.7	13.2	13.0	12.3	11.6	11.0	10.4	9.8	9.4	9.1	8.4	7.6	6.8	6.0	5.0
Hi PR	391	375	360	344	336	330	317	304	292	279	267	261	256	247	237	227	219	212
Lo PR	143	133	125	114	108	104	96	85	77	69	60	56	54	46	39	33	29	23

DSZC160481A* / CA*F4961*6** + TXV / MBVC2000**-1

HIGH STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	59.1	55.9	52.6	49.2	47.0	45.5	42.3	39.0	41.1	38.0	34.9	33.0	31.8	28.5	25.3	22.0	18.8	15.4
ΔT	35.3	33.4	31.4	29.4	28.1	27.2	25.3	23.3	24.6	22.7	20.9	19.7	19.0	17.0	15.1	13.2	11.2	9.2
kW	3.81	3.73	3.65	3.58	3.5	3.50	3.42	3.35	3.33	3.25	3.17	3.13	3.10	3.02	2.94	2.86	2.78	2.71
Amps	18.8	17.1	15.6	14.4	13.7	13.3	12.2	11.3	10.6	9.9	9.2	8.8	8.6	7.9	7.0	6.3	5.4	4.3
COP	4.54	4.39	4.22	4.03	3.89	3.81	3.61	3.41	3.61	3.42	3.22	3.09	3.00	2.77	2.52	2.25	1.98	1.67
EER	15.5	15.0	14.4	13.8	13.3	13.0	12.4	11.7	12.3	11.7	11.0	10.6	10.3	9.5	8.6	7.7	6.8	5.7
Hi PR	402	386	371	354	346	340	326	313	300	287	275	269	264	254	244	234	226	218
Lo PR	139	129	121	111	105	101	93	82	74	66	58	54	52	44	38	32	28	22

DSZC160601A* / CA*F4961*6** + TXV / MBVC2000**-1

HIGH STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	71.6	67.8	63.8	59.7	57.0	55.2	51.3	47.3	44.9	41.4	38.1	36.0	34.7	31.1	27.6	24.0	20.5	16.8
ΔT	36.9	34.9	32.8	30.7	29.3	28.4	26.4	24.3	23.1	21.3	19.6	18.5	17.8	16.0	14.2	12.4	10.6	8.6
kW	4.73	4.63	4.53	4.44	4.4	4.34	4.25	4.15	4.27	4.16	4.06	4.00	3.96	3.86	3.76	3.66	3.55	3.45
Amps	21.6	20.0	18.6	17.5	16.9	16.5	15.5	14.7	14.1	13.4	12.8	12.4	12.3	11.6	10.8	10.1	9.3	8.3
COP	4.44	4.29	4.12	3.94	3.81	3.73	3.54	3.34	3.08	2.91	2.75	2.63	2.56	2.36	2.15	1.92	1.69	1.42
EER	15.2	14.7	14.1	13.5	13.0	12.7	12.1	11.4	10.5	9.9	9.4	9.0	8.7	8.1	7.3	6.6	5.8	4.9
Hi PR	395	379	364	348	340	334	321	308	295	282	270	264	259	249	240	230	222	214
Lo PR	133	124	116	106	101	97	89	79	71	64	56	52	50	43	37	31	27	21

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Amps = Outdoor unit amps (comp.+fan)

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

kW = Total system power

Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

AHRI PERFORMANCE RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZC16 0241A*	AEPF303616C*+TXV		24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654458
	AEPF313716A*+TXV		24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654459
	CA*F3636*6C*+TXV	MBE1200**.-1B*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654460
	CA*F3636*6C*+TXV	MBE1600**.-1B*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654461
	CA*F3636*6C*+TXV	MBVC1200**.-1A*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654462
	CA*F3636*6C*+TXV	MBVC1600**.-1A*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654463
	CA*F3636*6C*+TXV	G*VC950704CXA*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654475
	CA*F3636*6C*+TXV	A*VC81155CXA*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654469
	CA*F3636*6C*+TXV	G*V950453B**	23,000	18,200	15.5	12	21,300	18,100	24,000	9.5	15,000	3654471
	CA*F3636*6C*+TXV	G*VC950453BXA*	23,000	18,200	15.5	12	21,300	18,100	24,000	9.5	15,000	3654474
	CA*F3636*6C*+TXV	A*V81155C**	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654466
	CA*F3636*6C*+TXV	A*VC80704BXA*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654467
	CA*F3636*6C*+TXV	G*VC90704CXA*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654473
	CA*F3636*6C*+TXV	A*V80704B**	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654464
	CA*F3636*6C*+TXV	A*VC80905CXA*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654468
	CA*F3636*6C*+TXV	G*V950704C**	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654472
	CA*F3636*6C*+TXV	A*V80905C**	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654465
	CA*F3636*6C*+TXV	G*V90704C**	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654470
	CA*F3642*6C*+TXV	MBE1600**.-1B*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654476
	CA*F3642*6C*+TXV	MBVC1600**.-1A*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654477
	CA*F3642*6C*+TXV	A*VC80905CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654482
	CA*F3642*6C*+TXV	G*VC950453BXA*	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654485
	CA*F3642*6C*+TXV	G*V950453B**	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654484
	CA*F3642*6C*+TXV	A*VC81155CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654483
	CA*F3642*6C*+TXV	A*V81155C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654480
	CA*F3642*6C*+TXV	A*VC80704BXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654481
	CA*F3642*6C*+TXV	A*V80704B**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654478
	CA*F3642*6C*+TXV	A*V80905C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654479
	CHPF3636B6C*+TXV	MBE1200**.-1B*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654486
	CHPF3636B6C*+TXV	MBVC1200**.-1A*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654487
	CHPF3636B6C*+TXV	A*V80905C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654489
	CHPF3636B6C*+TXV	A*V81155C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654490
	CHPF3636B6C*+TXV	A*VC81155CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654493
	CHPF3636B6C*+TXV	G*V950453B**	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654494
	CHPF3636B6C*+TXV	G*VC950453BXA*	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654495
	CHPF3636B6C*+TXV	A*VC80704BXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654491
	CHPF3636B6C*+TXV	A*V80704B**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654488
	CHPF3636B6C*+TXV	A*VC80905CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654492
	CHPF3642C6B*+TXV	MBE1600**.-1B*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654496
	CHPF3642C6B*+TXV	G*VC950453BXA*	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654499
	CHPF3642C6B*+TXV	A*V80704B**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654497
	CHPF3642C6B*+TXV	G*V950453B**	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654498
	CHPF3642C6C*+TXV	MBE1600**.-1B*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654500
	CHPF3642C6C*+TXV	MBVC1600**.-1A*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654501
	CHPF3642C6C*+TXV	A*V81155C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654504
	CHPF3642C6C*+TXV	A*VC80704BXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654505
	CHPF3642C6C*+TXV	G*VC950704CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654511
	CHPF3642C6C*+TXV	A*V80905C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654503
	CHPF3642C6C*+TXV	G*V950704C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654509
	CHPF3642C6C*+TXV	A*V80704B**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654502
CHPF3642C6C*+TXV	A*VC80905CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654506	
CHPF3642C6C*+TXV	A*VC81155CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654507	
CHPF3642C6C*+TXV	G*V950453B**	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654508	
CHPF3642C6C*+TXV	G*VC950453BXA*	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654510	
CHPF3743C6B*+TXV	A*V80905C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654512	
CHPF3743C6B*+TXV	A*VC80905CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654514	

See Notes on Page 26.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZC16 0241A* (cont.)	CHPF3743C6B*+TXV	A*VC81155CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654515
	CHPF3743C6B*+TXV	A*V81155C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654513
	CHPF3743C6B*+TXV	G*V950704C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654516
	CHPF3743C6B*+TXV	G*VC950704CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654517
	CHPF3743D6B*+TXV	MBE1600**.-1B*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654518
	CHPF3743D6B*+TXV	MBVC1600**.-1A*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654519
	CHTF3636B6A*+TXV	MBE1200**.-1B*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654520
	CHTF3636B6A*+TXV	MBVC1200**.-1A*	24,000	19,000	16	12.5	22,200	18,900	23,000	9.5	15,000	3654521
	CHTF3642C6A*+TXV	MBE1600**.-1B*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654522
	CHTF3642C6A*+TXV	MBVC1600**.-1A*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654523
	CSCF3036N6B*+TXV	G*V950704C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654531
	CSCF3036N6B*+TXV	A*VC81155CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654529
	CSCF3036N6B*+TXV	A*V80704B**	23,400	18,500	15	12	21,600	18,400	23,000	9.1	15,000	3654524
	CSCF3036N6B*+TXV	A*VC80704BXA*	23,400	18,500	15	12	21,600	18,400	23,000	9.1	15,000	3654527
	CSCF3036N6B*+TXV	A*VC80905CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654528
	CSCF3036N6B*+TXV	G*VC950453BXA*	23,400	18,500	15	12	21,600	18,400	23,000	9.3	15,000	3654532
	CSCF3036N6B*+TXV	G*V950453B**	23,400	18,500	15	12	21,600	18,400	23,000	9.3	15,000	3654530
	CSCF3036N6B*+TXV	A*V80905C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654525
	CSCF3036N6B*+TXV	A*V81155C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654526
	CSCF3036N6B*+TXV	G*VC950704CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654533
	CSCF3642N6C*+TXV	A*V81155C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654536
	CSCF3642N6C*+TXV	G*V950453B**	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654540
	CSCF3642N6C*+TXV	A*VC80704BXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654537
	CSCF3642N6C*+TXV	A*VC80905CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654538
	CSCF3642N6C*+TXV	A*VC81155CXA*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654539
	CSCF3642N6C*+TXV	A*V80704B**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654534
	CSCF3642N6C*+TXV	A*V80905C**	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654535
	CSCF3642N6C*+TXV	G*VC950453BXA*	24,000	19,000	15.5	12	22,200	18,900	24,000	9.3	15,000	3654541
	CT*F3636*6A*+TXV	MBE1200**.-1B*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654542
	CT*F3636*6A*+TXV	MBE1600**.-1B*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654543
	CT*F3636*6A*+TXV	MBVC1200**.-1A*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654544
	CT*F3636*6A*+TXV	MBVC1600**.-1A*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654545
	CT*F3642*6A*+TXV	MBE1600**.-1B*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654546
	CT*F3642*6A*+TXV	MBVC1600**.-1A*	24,000	19,000	16	12.5	22,200	18,900	24,000	9.5	15,000	3654547
DSZC16 0361A*	AEPF313716A*+TXV		34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654548
	CA*F3743*6A*+TXV	MBE1600**.-1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.75	21,000	3654549
	CA*F3743*6A*+TXV	MBE2000**.-1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654550
	CA*F3743*6A*+TXV	MBVC1600**.-1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.75	21,000	3654551
	CA*F3743*6A*+TXV	MBVC2000**.-1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654552
	CA*F3743*6A*+TXV	G*V951155D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654564
	CA*F3743*6A*+TXV	G*V90704C**	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654558
	CA*F3743*6A*+TXV	G*VC950453BXA*	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654565
	CA*F3743*6A*+TXV	G*VC950905DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654567
	CA*F3743*6A*+TXV	A*VC80704BXA*	34,200	25,000	15.5	11.5	31,600	24,600	34,000	9.3	21,000	3654556
	CA*F3743*6A*+TXV	A*VC80905CXA*	34,200	25,000	15	12	31,600	24,600	34,000	9.5	20,400	3654557
	CA*F3743*6A*+TXV	G*V90905D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654559
	CA*F3743*6A*+TXV	G*V950704C**	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654562
	CA*F3743*6A*+TXV	A*V80704B**	34,200	25,000	15.5	11.5	31,600	24,600	34,000	9.3	21,000	3654553
	CA*F3743*6A*+TXV	A*V80905C**	34,200	25,000	15	12	31,600	24,600	34,000	9.5	20,400	3654554
	CA*F3743*6A*+TXV	G*VC950704CXA*	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654566
	CA*F3743*6A*+TXV	G*V91155D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654560
	CA*F3743*6A*+TXV	G*V950453B**	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654561
	CA*F3743*6A*+TXV	G*V950905D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654563
	CA*F3743*6A*+TXV	G*VC951155DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654568
	CA*F3743*6A*+TXV	A*V81155C**	34,600	25,300	15	12	32,000	25,000	34,000	9.5	20,400	3654555
	CA*F4860*6B*+TXV	MBE1600**.-1B*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654569

See Notes on Page 26.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZC16 0361A* (cont.)	CA*F4860*6B*+TXV	MBE2000** -1B*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654570
	CA*F4860*6B*+TXV	MBVC1600** -1A*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654571
	CA*F4860*6B*+TXV	MBVC2000** -1A*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654572
	CA*F4860*6B*+TXV	A*V80905C**	35,000	25,600	15.5	12	32,400	25,300	34,000	9.5	20,400	3654574
	CA*F4860*6B*+TXV	G*V950453B**	35,000	25,600	15.5	11.5	32,400	25,300	34,000	9.3	21,000	3654581
	CA*F4860*6B*+TXV	A*VC80704BXA*	35,000	25,600	15.5	11.5	32,400	25,300	34,000	9.3	21,000	3654576
	CA*F4860*6B*+TXV	G*V90704C**	35,000	25,600	16	12	32,400	25,300	34,000	9.3	21,000	3654578
	CA*F4860*6B*+TXV	G*VC950453BXA*	35,000	25,600	15.5	11.5	32,400	25,300	34,000	9.3	21,000	3654585
	CA*F4860*6B*+TXV	G*VC950704CXA*	35,000	25,600	16	12	32,400	25,300	34,000	9.3	21,000	3654586
	CA*F4860*6B*+TXV	G*VC951155DXA*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654588
	CA*F4860*6B*+TXV	G*V91155D**	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654580
	CA*F4860*6B*+TXV	G*V90905D**	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654579
	CA*F4860*6B*+TXV	A*VC80905CXA*	35,000	25,600	15.5	12	32,400	25,300	34,000	9.5	20,400	3654577
	CA*F4860*6B*+TXV	G*V950704C**	35,000	25,600	16	12	32,400	25,300	34,000	9.3	21,000	3654582
	CA*F4860*6B*+TXV	A*V81155C**	35,000	25,600	15	12	32,400	25,300	34,000	9.5	20,400	3654575
	CA*F4860*6B*+TXV	A*V80704B**	35,000	25,600	15.5	11.5	32,400	25,300	34,000	9.3	21,000	3654573
	CA*F4860*6B*+TXV	G*V950905D**	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654583
	CA*F4860*6B*+TXV	G*V951155D**	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654584
	CA*F4860*6B*+TXV	G*VC950905DXA*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654587
	CA*F4961*6A*+TXV	G*VC90905DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.75	21,000	3654590
	CA*F4961*6A*+TXV	G*V90905D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.75	21,000	3654589
	CHPF3642C6C*+TXV	MBE1600** -1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654591
	CHPF3642C6C*+TXV	MBVC1600** -1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654592
	CHPF3642D6C*+TXV	MBE2000** -1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654593
	CHPF3642D6C*+TXV	MBVC2000** -1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654594
	CHPF3642D6C*+TXV	G*V951155D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654596
	CHPF3642D6C*+TXV	G*V950905D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654595
	CHPF3642D6C*+TXV	G*VC951155DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654598
	CHPF3642D6C*+TXV	G*VC950905DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654597
	CHPF3743C6B*+TXV	MBE1600** -1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654599
	CHPF3743C6B*+TXV	MBVC1600** -1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654600
	CHPF3743C6B*+TXV	A*VC80704BXA*	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654604
	CHPF3743C6B*+TXV	G*V950453B**	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654606
	CHPF3743C6B*+TXV	A*V81155C**	34,600	25,300	15	12	32,000	25,000	34,000	9.5	20,400	3654603
	CHPF3743C6B*+TXV	G*V950704C**	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654607
	CHPF3743C6B*+TXV	A*V80704B**	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654601
	CHPF3743C6B*+TXV	A*V80905C**	35,000	25,600	15	12	32,400	25,300	34,000	9.5	20,400	3654602
	CHPF3743C6B*+TXV	G*VC950704CXA*	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654611
	CHPF3743C6B*+TXV	G*VC950905DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654612
	CHPF3743C6B*+TXV	A*VC80905CXA*	35,000	25,600	15	12	32,400	25,300	34,000	9.5	20,400	3654605
	CHPF3743C6B*+TXV	G*V951155D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654609
	CHPF3743C6B*+TXV	G*VC951155DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654613
	CHPF3743C6B*+TXV	G*V950905D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654608
	CHPF3743C6B*+TXV	G*VC950453BXA*	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654610
	CHPF3743D6B*+TXV	MBE2000** -1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654614
	CHPF3743D6B*+TXV	MBVC2000** -1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654615
	CHPF3743D6B*+TXV	G*VC950704CXA*	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654626
	CHPF3743D6B*+TXV	G*V951155D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654624
	CHPF3743D6B*+TXV	A*V80704B**	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654616
	CHPF3743D6B*+TXV	G*V950905D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654623
	CHPF3743D6B*+TXV	G*VC950453BXA*	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654625
	CHPF3743D6B*+TXV	G*VC950905DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654627
CHPF3743D6B*+TXV	A*V81155C**	34,600	25,300	15	12	32,000	25,000	34,000	9.5	20,400	3654618	
CHPF3743D6B*+TXV	G*V950453B**	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654621	
CHPF3743D6B*+TXV	G*VC951155DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654628	
CHPF3743D6B*+TXV	A*VC80704BXA*	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654619	

See Notes on Page 26.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZC16 0361A* (cont.)	CHPF3743D6B*+TXV	A*V80905C**	34,200	25,000	15.5	12	31,600	24,600	34,000	9.5	20,400	3654617
	CHPF3743D6B*+TXV	A*VC80905CXA*	34,200	25,000	15.5	12	31,600	24,600	34,000	9.5	20,400	3654620
	CHPF3743D6B*+TXV	G*V950704C**	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654622
	CHTF3743C6A*+TXV	MBE1600** -1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654629
	CHTF3743C6A*+TXV	MBVC1600** -1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654630
	CHTF3743D6A*+TXV	MBE2000** -1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654631
	CHTF3743D6A*+TXV	MBVC2000** -1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654632
	CSCF3642N6C*+TXV	A*VC80704BXA*	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654636
	CSCF3642N6C*+TXV	G*V950704C**	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654639
	CSCF3642N6C*+TXV	G*VC950704CXA*	34,600	25,300	16	12	32,000	25,000	34,000	9.3	21,000	3654643
	CSCF3642N6C*+TXV	A*V80704B**	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654633
	CSCF3642N6C*+TXV	G*V951155D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654641
	CSCF3642N6C*+TXV	A*VC80905CXA*	35,000	25,600	15	12	32,400	25,300	34,000	9.5	20,400	3654637
	CSCF3642N6C*+TXV	G*VC950453BXA*	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654642
	CSCF3642N6C*+TXV	A*V80905C**	35,000	25,600	15	12	32,400	25,300	34,000	9.5	20,400	3654634
	CSCF3642N6C*+TXV	A*V81155C**	34,600	25,300	15	12	32,000	25,000	34,000	9.5	20,400	3654635
	CSCF3642N6C*+TXV	G*V950453B**	34,600	25,300	15.5	11.5	32,000	25,000	34,000	9.3	21,000	3654638
	CSCF3642N6C*+TXV	G*VC950905DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654644
	CSCF3642N6C*+TXV	G*VC951155DXA*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654645
	CSCF3642N6C*+TXV	G*V950905D**	34,600	25,300	16	12.5	32,000	25,000	34,400	9.5	21,000	3654640
	CSCF4860N6C*+TXV	A*VC80704BXA*	35,000	25,600	15.5	11.5	32,400	25,300	34,000	9.3	21,000	3654649
	CSCF4860N6C*+TXV	G*V950905D**	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654653
	CSCF4860N6C*+TXV	A*V81155C**	35,000	25,600	15	12	32,400	25,300	34,000	9.5	20,400	3654648
	CSCF4860N6C*+TXV	A*V80704B**	35,000	25,600	15.5	11.5	32,400	25,300	34,000	9.3	21,000	3654646
	CSCF4860N6C*+TXV	A*V80905C**	35,000	25,600	15	12	32,400	25,300	34,000	9.5	20,400	3654647
	CSCF4860N6C*+TXV	G*VC950453BXA*	35,000	25,600	15.5	11.5	32,400	25,300	34,000	9.3	21,000	3654655
	CSCF4860N6C*+TXV	G*VC951155DXA*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654658
	CSCF4860N6C*+TXV	G*V950704C**	35,000	25,600	16	12	32,400	25,300	34,000	9.3	21,000	3654652
	CSCF4860N6C*+TXV	G*V951155D**	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654654
	CSCF4860N6C*+TXV	G*V950453B**	35,000	25,600	15.5	11.5	32,400	25,300	34,000	9.3	21,000	3654651
	CSCF4860N6C*+TXV	G*VC950704CXA*	35,000	25,600	16	12	32,400	25,300	34,000	9.3	21,000	3654656
	CSCF4860N6C*+TXV	G*VC950905DXA*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654657
CSCF4860N6C*+TXV	A*VC80905CXA*	35,000	25,600	15	12	32,400	25,300	34,000	9.5	20,400	3654650	
CT*F3642*6A*+TXV	MBE1600** -1B*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.75	21,000	3654659	
CT*F3642*6A*+TXV	MBVC1600** -1A*	34,600	25,300	16	12.5	32,000	25,000	34,400	9.75	21,000	3654660	
CT*F4860*6A*+TXV	MBE2000** -1B*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654661	
CT*F4860*6A*+TXV	MBVC2000** -1A*	35,000	25,600	16	12.5	32,400	25,300	34,400	9.5	21,000	3654662	
DSZC16 0481A*	AEPF426016C*+TXV		46,000	35,000	15.5	12	42,600	34,500	46,000	9.5	34,000	3654663
	CA*F4961*6A*+TXV	MBE1600** -1B*	47,000	35,700	15.5	12.5	43,500	35,200	47,000	9.75	34,000	3654664
	CA*F4961*6A*+TXV	MBE2000** -1B*	47,500	36,100	16	13	43,900	35,600	47,000	9.75	34,000	3654665
	CA*F4961*6A*+TXV	MBVC1600** -1A*	47,000	35,700	15.5	12.5	43,500	35,200	47,000	9.75	34,000	3654666
	CA*F4961*6A*+TXV	MBVC2000** -1A*	47,500	36,100	16	13	43,900	35,600	47,000	9.75	34,000	3654667
	CA*F4961*6A*+TXV	G*V90905D**	47,000	35,700	15.5	12.5	43,500	35,200	46,000	9	34,000	3654671
	CA*F4961*6A*+TXV	G*V950704C**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654673
	CA*F4961*6A*+TXV	G*VC950704CXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654676
	CA*F4961*6A*+TXV	G*VC950905DXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654677
	CA*F4961*6A*+TXV	G*V90704C**	47,000	35,700	15	12	43,500	35,200	46,000	9	34,000	3654670
	CA*F4961*6A*+TXV	G*VC951155DXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654678
	CA*F4961*6A*+TXV	A*V80905C**	47,000	35,700	15.5	12	43,500	35,200	46,000	9.5	34,000	3654668
	CA*F4961*6A*+TXV	A*V81155C**	47,500	36,100	15.5	12	43,900	35,600	46,000	9.5	34,000	3654669
	CA*F4961*6A*+TXV	G*V91155D**	47,000	35,700	16	12.5	43,500	35,200	46,000	9	34,000	3654672
	CA*F4961*6A*+TXV	G*V951155D**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654675
	CA*F4961*6A*+TXV	G*V950905D**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654674
	CHPF4860D6D*+TXV	MBE2000** -1B*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.75	34,000	3654679
	CHPF4860D6D*+TXV	MBVC2000** -1A*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.75	34,000	3654680
	CHPF4860D6D*+TXV	G*V950704C**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654683

See Notes on Page 26.

AHRI PERFORMANCE RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			AHRI #
	COILS & AIR HANDLERS	FURNACE/BLOWER	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HIGH	HSPF ⁴	LOW	
DSZC16 0481A* (cont.)	CHPF4860D6D*+TXV	A*V80905C**	47,500	36,100	15.5	12	43,900	35,600	46,000	9.5	34,000	3654681
	CHPF4860D6D*+TXV	G*VC950905DXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654687
	CHPF4860D6D*+TXV	G*VC951155DXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654688
	CHPF4860D6D*+TXV	A*V81155C**	47,500	36,100	15.5	12	43,900	35,600	46,000	9.5	34,000	3654682
	CHPF4860D6D*+TXV	G*V950905D**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654684
	CHPF4860D6D*+TXV	G*V951155D**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654685
	CHPF4860D6D*+TXV	G*VC950704CXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654686
	CHTF4860D6A*+TXV	MBE2000**-1B*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.75	34,000	3654689
	CHTF4860D6A*+TXV	MBVC2000**-1A*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.75	34,000	3654690
	CSCF4860N6C*+TXV	A*V80905C**	47,000	35,700	15.5	12	43,500	35,200	46,000	9.5	34,000	3654691
	CSCF4860N6C*+TXV	G*V951155D**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654695
	CSCF4860N6C*+TXV	G*VC950704CXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654696
	CSCF4860N6C*+TXV	G*VC950905DXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654697
	CSCF4860N6C*+TXV	G*V950905D**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654694
	CSCF4860N6C*+TXV	A*V81155C**	47,000	35,700	15.5	12	43,500	35,200	46,000	9.5	34,000	3654692
	CSCF4860N6C*+TXV	G*V950704C**	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654693
	CSCF4860N6C*+TXV	G*VC951155DXA*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.5	34,000	3654698
	CT*F4860*6A*+TXV	MBE2000**-1B*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.75	34,000	3654699
	CT*F4860*6A*+TXV	MBVC2000**-1A*	47,500	36,100	16	12.5	43,900	35,600	47,000	9.75	34,000	3654700
	DSZC16 0601A*	AEPF426016C*+TXV		57,000	42,200	15	12	52,700	41,600	57,000	9	36,400
CA*F4961*6A*+TXV		MBE2000**-1B*	57,000	42,200	16	12.2	52,700	41,600	57,000	9.75	36,000	3654702
CA*F4961*6A*+TXV		MBVC2000**-1A*	57,000	42,200	16	12.2	52,700	41,600	57,000	9.75	36,000	3654703
CA*F4961*6A*+TXV		G*V950905D**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654708
CA*F4961*6A*+TXV		G*VC951155DXA*	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654711
CA*F4961*6A*+TXV		A*V80905C**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654704
CA*F4961*6A*+TXV		G*V91155D**	56,000	41,400	15	12	51,800	40,900	57,000	9	36,000	3654707
CA*F4961*6A*+TXV		G*VC950905DXA*	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654710
CA*F4961*6A*+TXV		A*V81155C**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654705
CA*F4961*6A*+TXV		G*V90905D**	55,500	41,100	14.5	12	51,300	40,500	57,000	9	36,000	3654706
CA*F4961*6A*+TXV		G*V951155D**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654709
CHPF4860D6D*+TXV		MBE2000**-1B*	57,000	42,200	16	12.2	52,700	41,600	57,000	9.35	36,000	3654712
CHPF4860D6D*+TXV		MBVC2000**-1A*	57,000	42,200	16	12.2	52,700	41,600	57,000	9.35	36,000	3654713
CHPF4860D6D*+TXV		G*VC950905DXA*	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654718
CHPF4860D6D*+TXV		G*V950905D**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654716
CHPF4860D6D*+TXV		G*VC951155DXA*	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654719
CHPF4860D6D*+TXV		A*V80905C**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654714
CHPF4860D6D*+TXV		A*V81155C**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654715
CHPF4860D6D*+TXV		G*V951155D**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654717
CHTF4860D6A*+TXV		MBE2000**-1B*	57,000	42,200	16	12.2	52,700	41,600	57,000	9.35	36,000	3654720
CHTF4860D6A*+TXV		MBVC2000**-1A*	57,000	42,200	16	12.2	52,700	41,600	57,000	9.35	36,000	3654721
CSCF4860N6C*+TXV		A*V81155C**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654723
CSCF4860N6C*+TXV		G*VC950905DXA*	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654726
CSCF4860N6C*+TXV		G*V950905D**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654724
CSCF4860N6C*+TXV		G*V951155D**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654725
CSCF4860N6C*+TXV		G*VC951155DXA*	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654727
CSCF4860N6C*+TXV		A*V80905C**	57,000	42,200	15	12	52,700	41,600	57,000	9.25	36,000	3654722
CT*F4860*6A*+TXV		MBE2000**-1B*	57,000	42,200	16	12.2	52,700	41,600	57,000	9.75	36,000	3654728
CT*F4860*6A*+TXV		MBVC2000**-1A*	57,000	42,200	16	12.2	52,700	41,600	57,000	9.75	36,000	3654729

¹ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F


² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ HSPF = Heating Seasonal Performance Factor

NOTES:

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

DSZC16 WIRING DIAGRAM

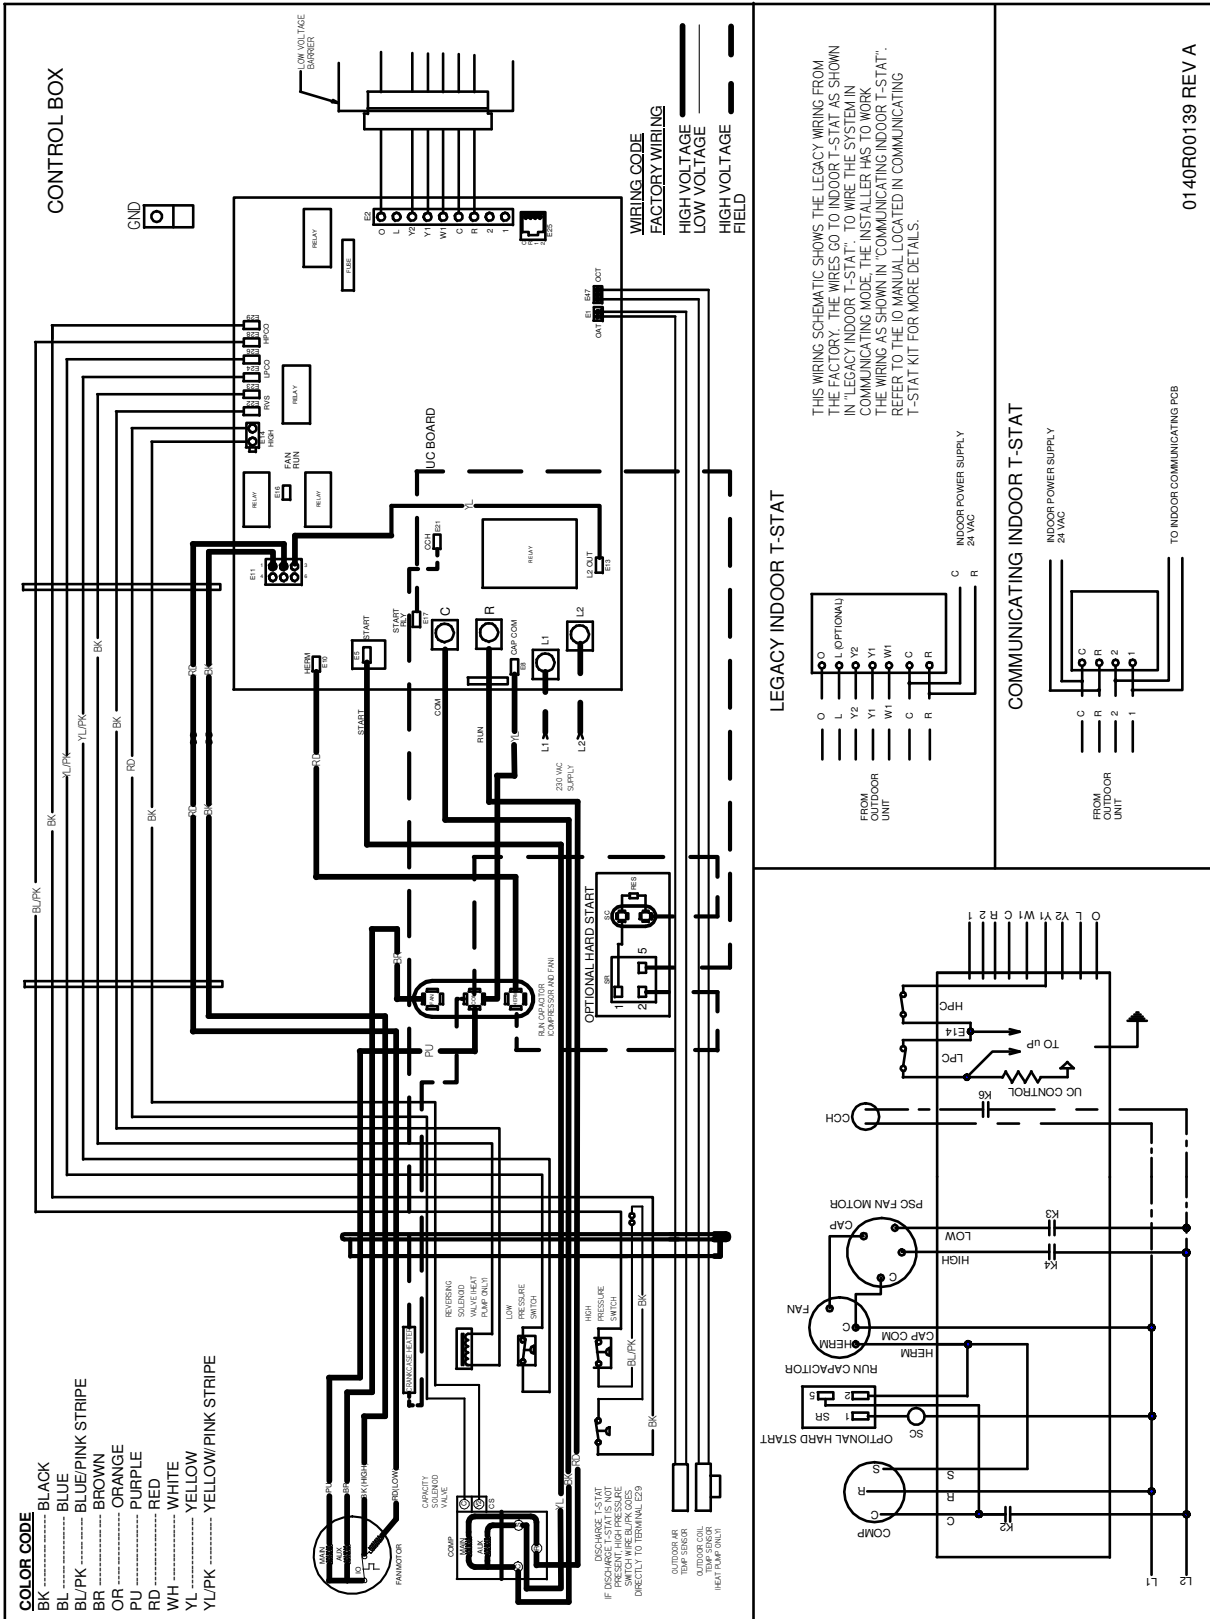

01.40R001.39 REV A

WARNING


⚡

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

PRODUCT SPECIFICATIONS

DIMENSIONS

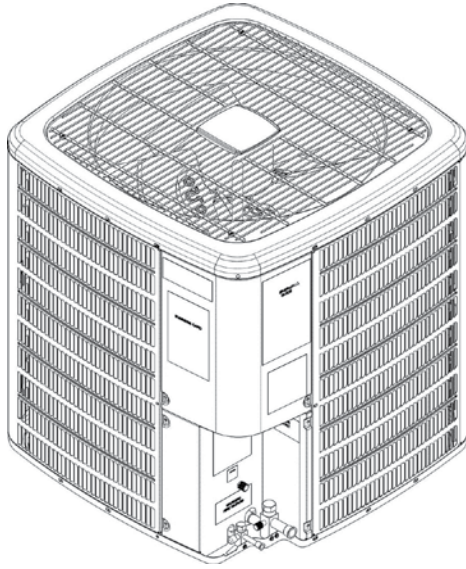

MODEL	DIMENSIONS (")
DSZC160241A	29 x 29 x 38 $\frac{1}{4}$
DSZC160361A	35 $\frac{1}{2}$ x 35 $\frac{1}{2}$ x 38 $\frac{1}{4}$
DSZC160481A	35 $\frac{1}{2}$ x 35 $\frac{1}{2}$ x 38 $\frac{1}{4}$
DSZC160601A	35 $\frac{1}{2}$ x 35 $\frac{1}{2}$ x 38 $\frac{1}{4}$

ACCESSORIES

MODEL	DESCRIPTION	DSZC16 024	DSZC16 036	DSZC16 048	DSZC16 060
ABK-20	Anchor Bracket Kit				
B1141643 ¹	24V Transformer	X	X	X	X
CSR-U-1	Hard-start Kit	X	X		
CSR-U-2	Hard-start Kit		X	X	X
CSR-U-3	Hard-start Kit			X	X
FSK01A ²	Freeze Protection Kit	X	X	X	X
OT18-60A ³	Outdoor Thermostat/Lockout Thermostat	X	X	X	X
TX2N4 ⁴	TXV Kit	X			
TX3N4 ⁴	TXV Kit		X		
TX5N4 ⁴	TXV Kit			X	X

Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Available in 24V legacy mode only. This feature is integrated in the communicating mode.

² Installed on indoor coil

³ Available in 24V legacy mode only. This feature is integrated in the communicating mode. Required for heat pump applications where ambient temperature falls below 0 OF with 50% or higher relative humidity.

⁴ Field-installed, non-bleed, expansion valve kit; Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device.

