

ZERO CLEARANCE OUTDOOR GAS FIREPLACE



EVOLUTIONARY STYLE. REVOLUTIONARY FLEXIBILITY.

 Model
 OFP42N-BLACK OFP42NS-STAINLESS
 OFP42LP-BLACK OFP42LPS-STAINLESS

 Fuel
 natural noput Max.
 propane 55,000 BTU

 Input Min.
 38,000 BTU
 44,000 BTU

STANDARD FEATURES

- > Hi/lo Millivolt valve with variable adjustment of flame and BTU
- > A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- > Stainless steel pull screen
- > Lava rock

OPTIONAL FEATURES

Refractory Liner – Traditional and Herringbone

Surround - Stainless Steel

Remote Control - On/Off

Weather Cover – Stainless Steel or Black

Spark Assist – Battery operated pilot burner ignitor


SCREENED PORCH INSTALLATION GUIDELINES

- > Porch Area 96 sq. ft.
- > Ceiling Height 92"
- > A minimum of two walls can be screened but must be open to outside ventillation.


Top of screen height - 78"

Screen Area - 64 sq. ft

Refer to installation manual for additional details of framing specifications and clearances.

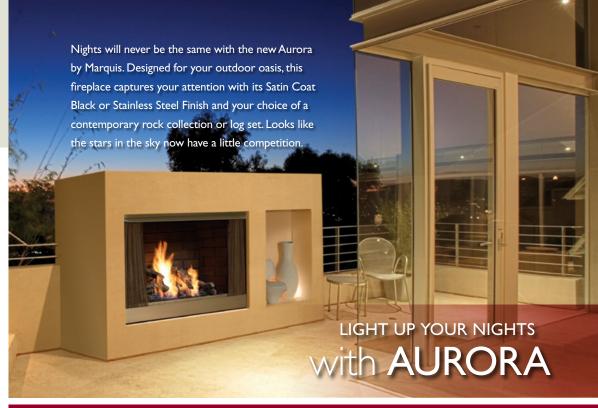

UNIT AND FRAMING SPECIFICATIONS

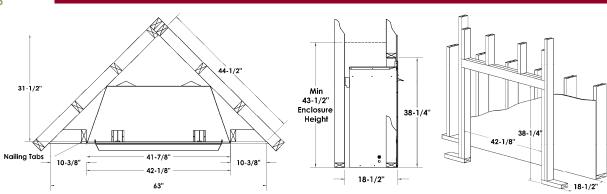



2340 Logan Avenue Winnipeg, Manitoba, Canada R2R 2V3 Phone: 204.632.1962 Fax: 204.632.1960 www.marquisfireplaces.net



Kingsman Fireplaces maintains a program of continuous testing refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: These models are certified for USA and Canada as an Outdoor Gas Fireplace. CSA 4-96 US 2nd Edition, CGA CR97-003, CGA 2.17-M91.

B064 - 06/09