

RELY ON RUUD.™

# **SUBMITTAL COVER SHEET**

SUBMITTED BY DATE					
UNIT SUMMARY					
NOTES:					
	DA UNIT SUMMARY	UNIT SUMMARY         Image: I			

## SUBMITTAL SHEET FOR 13PJL SERIES 11/2 TO 5 NOMINAL TON [5.28 TO 17.58 kW], UP TO 14.5 SEER HEAT PUMP UNITS

JOB NAME		 LOCATION
CONTRACTOR		 ORDER NO
ENGINEER		 UNIT MODEL NO
SUBMITTED FOR	□ APPROVAL	COIL MODEL NO
DATE		 AIR HANDLER MODEL NO

### UNIT DATA

#### COOLING PERFORMANCE

EFFICIENCY	SEER
TOTAL CAPACITY*	MBH [kW]
SENSIBLE CAPACITY*	MBH [kW]
OUTDOOR DESIGN TEMP	°F [°C] DB
TEMP. OF AIR ENTERING EVAPORATOR COIL	
	_ °F [°C] WB
POWER INPUT REQUIREMENT	kW
· · · ·	
HEATING PERFORMAN	ICE
EFFICIENCY	HSPF
TOTAL CAPACITY*	MBH [kW]
OUTDOOR DESIGN TEMP	°F [°C] DB
TEMP. OF AIR ENTERING	
EVAPORATOR COIL	°F [°C] DB
SUPPLY AIR BLOWER PERFO	RMANCE
TOTAL AIR SUPPLY	CFM [L/s]
TOTAL RESISTANCE EXTERNAL TO UNIT	
BLOWER SPEED	
POWER OUTPUT REQUIREMENT	
MOTOR RATING	
POWER INPUT REQUIREMENT	kW
ELECTRICAL DATA	
POWER SUPPLY	Hz
	,

POWER SUPPLY	112
TOTAL UNIT AMPACITY	AMPS
MINIMUM WIRE SIZE	AWG
MAXIMUM OVERCURRENT DEVICE FUSES/HACR BREAKER	AMPS

#### CLEARANCES

ACCESS SIDE	24" [609.6 mm]
AIR INLETS	12" [304.8 mm]
ABOVE UNIT	60" [1524 mm]

#### FEATURES FOR 13PJL SERIES HEAT PUMP UNITS 11/2 TO 5 NOMINAL TON [5.28 TO 17.58 kW]

- Outdoor heat pump designed for ground level or rooftop installations. These units offer comfort and dependability for single, multi-family and light commercial applications.
- Painted louvered steel cabinet
- Easily accessible control box
- Condenser coils constructed with copper tubing and enhanced aluminum fins.
- Grille/Motor mount for quiet fan operation
- Filter Drier (shipped not installed)


#### **ACCESSORIES/OPTIONS**

Outdoor Thermostats (Model No. RXPT-A01, A02, A03, A04)	□
High Pressure Control (Model No. RXAB-A07)	□
Low Ambient Control (Model No. RXAD-A07)	□
Compressor Time Delay Control (Model No. RXMD-B01)	□
Blower Time Delay Control (Model No. RXMD-C04)	□
Sound Enclosure*	□
Heat Pump Monitor (Model No. RXPM-B01)	□
Thermostats and Subbases*	
Start Components*	
*Available through the Replacement Parts Division	





ALCRI CERTIFIED, www.ahridirectory.org

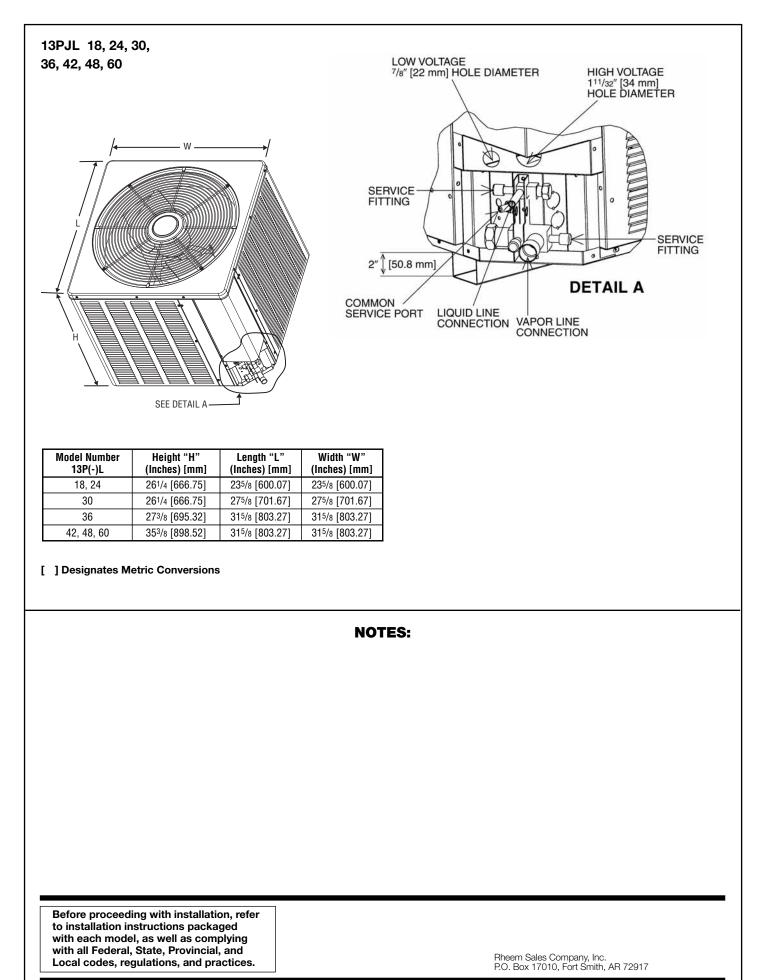

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."
PRINTED IN U.S.A. 6-14 QG FORM NO. X33-1420