

RELY ON RUUD.™

SUBMITTAL COVER SHEET

| SUBMITTED BY DATE | | | | | | |
|-------------------|--------------------|---|--|--|--|--|
| UNIT SUMMARY | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| NOTES: | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | DA UNIT SUMMARY | UNIT SUMMARY Image: I | | | | |

SUBMITTAL SHEET FOR 14PJM SERIES 11/2 TO 5 NOMINAL TON [5.28 TO 17.58 kW], 14.5 SEER HEAT PUMP UNITS

| JOB NAME | | LOCATION |
|---------------|------|----------------------|
| CONTRACTOR | | ORDER NO |
| ENGINEER | | UNIT MODEL NO |
| SUBMITTED FOR | | COIL MODEL NO |
| DATE | | AIR HANDLER MODEL NO |

UNIT DATA

COOLING PERFORMANCE

| EFFICIENCY SEER TOTAL CAPACITY* MBH [kW] SENSIBLE CAPACITY* MBH [kW] OUTDOOR DESIGN TEMP °F [°C] DB TEMP. OF AIR ENTERING EVAPORATOR COIL °F [°C] DB | |
|---|--|
| °F [°C] WB POWER INPUT REQUIREMENT kW (*uses blower motor heat) | |
| HEATING PERFORMANCE | |
| EFFICIENCY HSPF TOTAL CAPACITY* MBH [kW] OUTDOOR DESIGN TEMP °F [°C] DB TEMP. OF AIR ENTERING EVAPORATOR COIL °F [°C] DB | |
| SUPPLY AIR BLOWER PERFORMANCE | |
| TOTAL AIR SUPPLY CFM [L/s] TOTAL RESISTANCE EXTERNAL TO UNIT IWG BLOWER SPEED RPM POWER OUTPUT REQUIREMENT BHP MOTOR RATING HP [W] POWER INPUT REQUIREMENT KW | |
| ELECTRICAL DATA | |
| POWER SUPPLY Hz TOTAL UNIT AMPACITY AMPS | |

MINIMUM WIRE SIZE

CLEARANCES

MAXIMUM OVERCURRENT DEVICE FUSES/HACR BREAKER

ACCESS SIDE

AIR INLETS

ABOVE UNIT

AWG

AMPS

24" [609.6 mm]

12" [304.8 mm]

60" [1524 mm]


FEATURES FOR 14PJM SERIES HEAT PUMP UNITS 11/2 TO 5 NOMINAL TON [5.28 TO 17.58 kW]

- Rheem *Value Series* remote heat pumps offer comfort and dependability for single, multi-family and light commercial applications.
- Painted louvered steel cabinet
- Easily accessible control box
- Condenser coils constructed with copper tubing and enhanced aluminum fins
- Grille/Motor mount for quiet fan operation
- Filter Drier (shipped not installed)

ACCESSORIES/OPTIONS

| Outdoor Thermostats | |
|--|--|
| High Pressure Control (Model No. RXAB-A07) | |
| Low Ambient Control (Model No. RXAD-A08) | |
| Compressor Time Delay Control (Model No. RXMD-B01) | |
| Sound Enclosure* | |



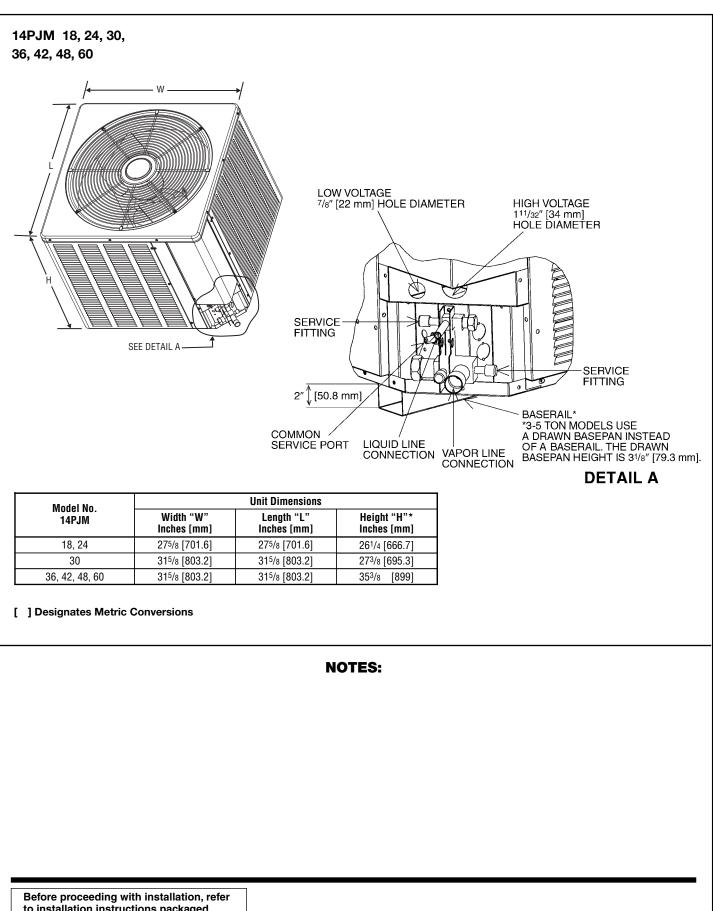

Before proceeding with installation, refe to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Rheem Sales Company, Inc. P.O. Box 17010, Fort Smith, AR 72917

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice." PRINTED IN U.S.A. 6-14 QG FORM NO. X33-1419