

RUUD 95 TANKLESS WATER HEATERS

# 95 Tankless Series

Continuous hot water for 3 bathroom homes\*

- Indoor direct vent and outdoor gas models
- 11,000 - 199,900 BTU max.
- 9.5 gal./min. at 35° F rise max., 7.4 gal./min. at 45° F rise
- 12-Year limited warranty on heat exchanger

*and more!* See inside.



**Tankless** water heaters  
Continuous hot water



Rely on Ruud™

## RUUD 95 TANKLESS SERIES

**RUTG-95DV indoor direct vent and RUTG-95X outdoor natural and LP models – 11,000 - 199,900 BTU max.**  
9.5 gal./min at 35° F rise max., 7.4 gal./min. at 45° F rise

Limited Warranty:

**12-Year on heat exchanger, 5-Year on parts, 1-Year on labor**

See Residential Warranty Information Brochure for complete warranty information.

- **New!** 3"/5" Concentric Vent System with Intergrated Condensate Collector
- Connects to Metal Fab Inc., 3"/5" Concentric Venting without an adapter
- **New!** Next Generation Burner Technology
- **Industry Best!** .26 GPM Minimum Flow Rate, .40 GPM Minimum Activation Flow Rate
- UMC-117 remote control and 10 ft. of thermostat wire is included
- EZ-Link™ cable available for high demand applications to connect two tankless units to operate as one
- **New!** Manifold up to 6 units with an optional MIC-6 manifold control board
- **Exclusive!** All Ruud models can be linked in up to 20 unit manifold installations by using the optional MIC-180 and MICS-180 manifold control assembly
- High-altitude capability – up to 9,840 ft. elevation above sea level (no chip required)
- **Exclusive!** Guardian OFW™ overheat film wrap
- All Ruud tankless models are third-party efficiency certified by GAMA
- Continuous hot water, energy saving and compact, space saving design
- Intelligent electronic controls designed to increase energy efficiency and safety
- Self Diagnostic System
- Digital display shows temperature setting and maintenance codes
- Built-in electric blower
- Supplied with a 120 volt power cord
- Environmentally friendly Low NOx burner meets SCAQMD rule 1146 requirements
- Freeze protection to -30° F

Product appearance may differ.

\* Based on simultaneous showers using 2.5 gallons per minute. Flow rates vary depending on temperature of cold water supply.

**With Ruud's new conversion kit,  
our 95 tankless series can now be  
converted to COMMERCIAL!**



199,900 BTU INDOOR DIRECT VENT



199,900 BTU OUTDOOR



## Specifications

DESCRIPTION			FEATURES				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)						ENERGY INFO.		
MODEL NUMBER	GAS INPUT BTU/HR.	TYPE	TEMP. RANGE	WATER FLOW RATE			CONNECTION		HEIGHT	WIDTH	DEPTH	VENT DIAMETER (INCHES)	SHIP. WEIGHT (LBS.)	ENERGY FACTOR	D.O.E. ANN. OP. COST NAT/LP
				GPM @ 77° RISE MAX.	GPM @ 45° RISE MAX.	GPM @ 35° RISE MAX.	WATER	GAS							
<b>RUUD TANKLESS WATER HEATERS FOR 2-3 BATHROOM HOMES</b>															
RUTG-95DVN*	11,000-199,900	Indoor Direct Vent	85° to 140° F*	4.3	7.4	9.5	3/4	3/4	25-5/8	13-7/8	9-7/8	3 by 5 CONCENTRIC	54	.82	\$223/\$374
RUTG-95XN*	11,000-199,900	Outdoor	85° to 140° F*	4.3	7.4	9.5	3/4	3/4	23-5/8	13-7/8	8-7/8	N/A	54	.82	\$223/\$374

All models are available in Natural Gas and Propane (LP).

For Propane replace the N with P when ordering.


- Factory set maximum temperature is 120° F. See Use and Care Manual for setting.
- Consult factory for information on sizing the application.

Vent Termination Kits are required for Direct Vent models. Contact your distributor for details.

Proper gas pressure must be ensured to supply tankless gas water heaters – up to 199,900 BTU for RUTG-95 models. (Consult your gas supplier)

Model Number	Temperature Rise (° F)									
	35°	45°	50°	60°	70°	77°	80°	90°	100°	
RUTG-95 Water Flow (GPM)	9.5	7.4	6.6	5.5	4.7	4.3	4.1	3.7	3.3	

Above estimates are for sizing purposes only.

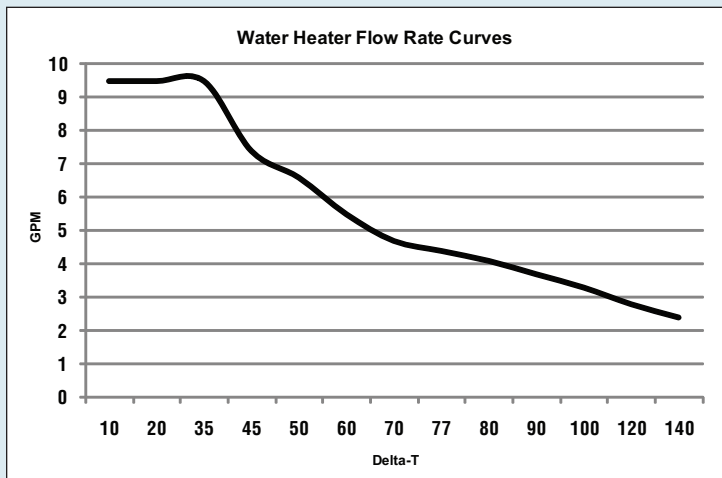

These units are designed to meet or exceed ANSI (American National Standards Institute) requirements and have been tested according to D.O.E. test procedures and meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria for energy consuming appliances.

Before purchasing this appliance, read important energy cost and efficiency information available from your supplier.

\*COMMERCIAL OPERATION AVAILABLE WITH CONVERSION KITS:

**RTG20214A** FOR RUTG-95DVN

**RTG20214B** FOR RUTG-95DVP

**RTG20214C** FOR RUTG-95XN

**RTG20214D** FOR RUTG-95XP

Temperature range for commercial: 85° to 185° F.

Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures. D.O.E. national average fuel rate natural gas \$1.218/therm; LP \$1.87/gallon.



Rely on Ruud™

# RUUD 95 TANKLESS SERIES

*More Ruud water heaters have been installed in homes than any other brand. Ruud has been providing reliable water heating to the world since we invented the water heater over 100 years ago.*

## Premier Customer Experience *Priority One!*

Ruud Water Heating will be the premier customer experience provider of Ruud tankless water heaters. Ruud's philosophy of speed, accuracy and attentiveness will guide this initiative. This will be achieved through customer education, internal and external training, and after sales service.



For more information,  
call **1-866-720-2076**  
or visit **ruud.com**

*In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.*



**Tankless** water heaters  
Continuous hot water



Rely on Ruud™

Ruud Water Heating and Heating & Cooling Products  
101 Bell Road • Montgomery, AL 36117-4305  
1-866-720-2076 • [www.ruud.com](http://www.ruud.com)

Printed in U.S.A. 01/10 WP TKR95