

# RadiantPEX<sup>TM</sup> PLUS

Cross-linked Polyethylene Tubing w/EVOH Barrier

# Superior Protection




the professional's choice


for hydronic radiant heating, snowmelting systems and distribution piping.

Unlike some pex connection systems, our **three choices for RadiantPEX+ connections** can be quickly made and immediately pressure tested.

**CinchClamps<sup>TM</sup>** unique stainless steel design allows for easier connections in tight, hard-to-reach spaces.

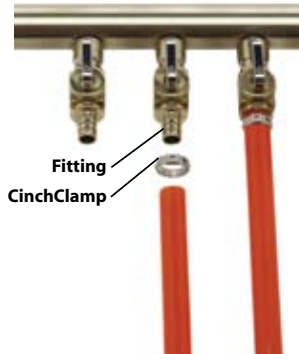


**CrimpRings<sup>TM</sup>** are precision-formed, ductile copper connectors. When crimped to brass crimp fittings, these connectors form a permanent seal.

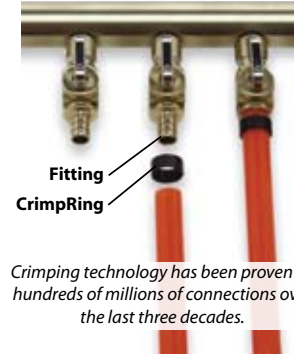

*Crimping technology has been proven by hundreds of millions of connections over the last three decades.*

**T-20 Compression fittings** do not require any special tools. A simple crescent wrench is all that is needed.

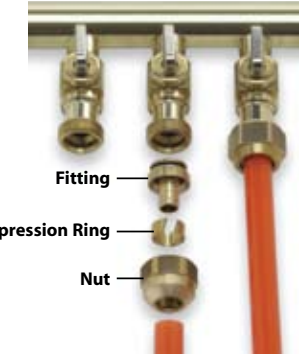

## Tools




The PEX CinchTool will cinch all sizes of stainless steel CinchClamps and makes connections in tight spaces a "cinch".




Crimp tools are available for 3/8" through 1-1/2" PEX.

## Manifolds



Watts Europe's finest stainless steel manifolds.



Tubular copper manifolds from 1" to 6" diameter.



CustomCut<sup>TM</sup> copper manifolds from 1" to 2" diameter.

## HydroNex<sup>®</sup> Mechanical Panels



HydroNex panels are manufactured "building block" mechanical room solutions. Select from a wide range of panel modules, mount, and go. Each panel is designed to save time and money. HydroNex panels can be used with cast iron, copper fin tube, and condensing boilers as well as geothermal and solar heat sources.

## Codes, Listings and Standards

- RadiantPEX and RadiantPEX+ are manufactured to American Standard Testing Methods (ASTM F-876 and F-877) and to SDR9 dimensions. These standards include requirements and testing methods for materials, workmanship, dimensions, environmental stress cracking, sustained hydrostatic pressure strength, bend strength, and degree of cross-linking. RadiantPEX and RadiantPEX+ meet or exceed these standards.
- RadiantPEX and RadiantPEX+ are tested and listed by the National Sanitation Foundation to NSF-14 (rfh) and NSF P171 (chlorine resistance).
- RadiantPEX and RadiantPEX+ conform to ASTM E-84 (Standard Test Method for Surface Burning Characteristics of Building Materials) and UL 263 (Fire Tests of Building Construction and Materials).
- RadiantPEX and RadiantPEX+ are listed by the International Code Council Evaluation Service (ICC) to Report #ESR-1155, and PMG-1008 which give compliance to IPC, IMC, UMC, and UPC.
- All RadiantPEX and RadiantPEX+ pipe is certified to CSA Standard B137.5.

Description	Model #*	Nominal I.D. (inches)	Nominal O.D. (inches)	Standard Length(s) (feet)**	Bend Radius (inches)
3/8" RadiantPEX+	PB032061-XXX	0.35	1/2	600	4
1/2" RadiantPEX+	PB032081-XXX	0.475	5/8	100 / 300 / 500 / 600 / 1,000	5
5/8" RadiantPEX+	PB032101-XXX	0.574	3/4	300 / 500 / 600 / 1,200	6
3/4" RadiantPEX+	PB032121-XXX	0.671	7/8	20 / 100 / 300 / 500 / 600 / 1,000 / 1,200	7
1" RadiantPEX+	PB032161-XXX	0.863	1-1/8	20 / 100 / 300 / 600	9
1-1/4" RadiantPEX <sup>S</sup>	PB032181-XXX	1.054	1-3/8	20 / 100 / 300	11
1-1/2" RadiantPEX <sup>S</sup>	PB032201-XXX	1.244	1-5/8	20 / 100 / 300	13

\* XXX denotes the stick or coil length required.

\*\* Stick lengths (20') come in bundles of 25 for 3/4" RadiantPEX+ and 5 for other sizes.

<sup>S</sup> 1-1/4" and larger sizes are 3-layer RadiantPEX, not RadiantPEX+.



**In the United States:**  
**Watts Radiant, Inc.**  
 4500 Progress Place  
 Springfield, MO 65803  
 1-800-276-2419 toll-free  
 417-864-6108 phone  
 417-864-8161 fax  
 www.wattsradiant.com

**In Canada:**  
**Watts Industries - Canada**  
 5435 North Service Road  
 Burlington, ON L7L 5H7  
 1-888-208-8927 toll-free phone  
 905-332-4090 phone  
 905-332-7068 fax  
 www.wattscanada.ca





# Watts Radiant


Floor Heating & Snowmelting



A subsidiary of Watts Water Technologies, Inc.

## RadiantPEX<sup>+</sup> PLUS

Cross-linked Polyethylene Tubing w/EVOH Barrier

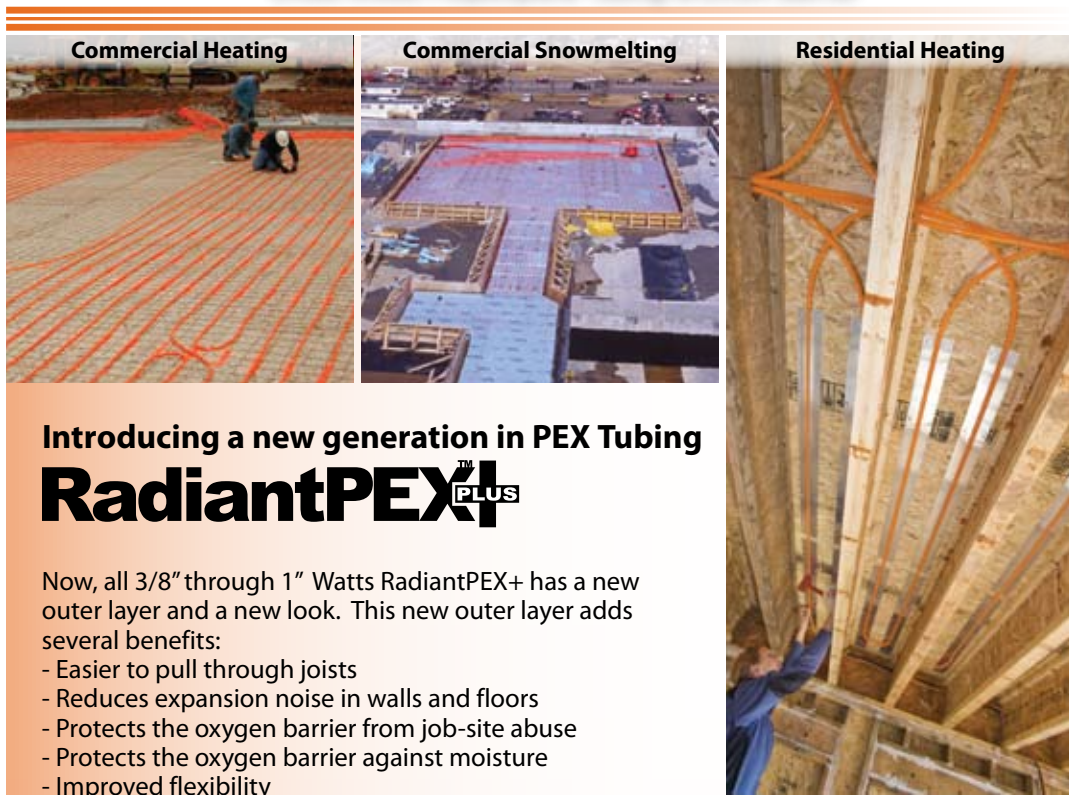

### Introducing a new generation in PEX Tubing

## RadiantPEX<sup>+</sup> PLUS

Now, all 3/8" through 1" Watts RadiantPEX+ has a new outer layer and a new look. This new outer layer adds several benefits:

- Easier to pull through joists
- Reduces expansion noise in walls and floors
- Protects the oxygen barrier from job-site abuse
- Protects the oxygen barrier against moisture
- Improved flexibility



### All of our barrier PEX offers these benefits over traditional piping systems:

- Extremely flexible
- Light and easy to transport and store
- Maintenance free
- Corrosion resistant
- Connection systems that are fast and reliable

### Commercial Approvals:

- Conforms to UL 263 (fire test of building and construction materials)
- Conforms to ASTM E-84


### New RadiantPEX+ Custom Lengths – Two Shades of Green

The majority of our barrier PEX is now produced in very large coils. This allows for **easier installation** on the jobsite. It also allows us to cut the lengths you need. By special-ordering the exact lengths needed for a project, you can save a lot of money (green) and potentially save hundreds or thousands of feet of wasted PEX from going to the landfill (that's green, too!). Please call ahead and allow at least two weeks for us to process.




## Where to use RadiantPEX<sup>+</sup> PLUS


RadiantPEX<sup>+</sup> can be used in a wide range of applications, from UnderFloor with heat transfer plates to slabs. Use RadiantPEX+ for snowmelt systems in concrete or under brick pavers.

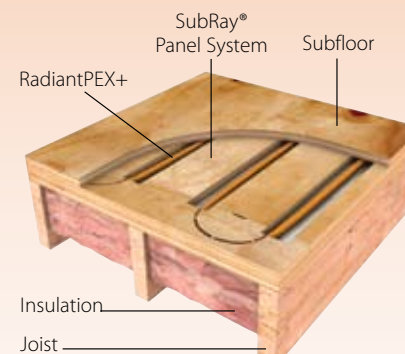


Install RadiantPEX+ in "dry-panel systems" using Watts Radiant's SubRay system. It works great for walls and ceilings, too.

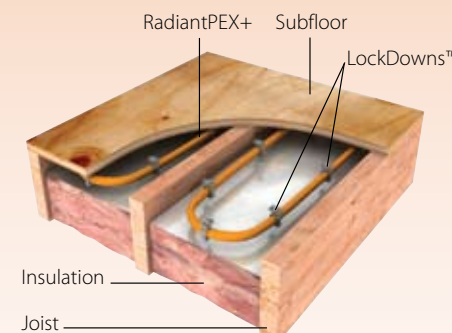


Install RadiantPEX+ for underfloor floor warming using Watts Radiant's LockDown fasteners.

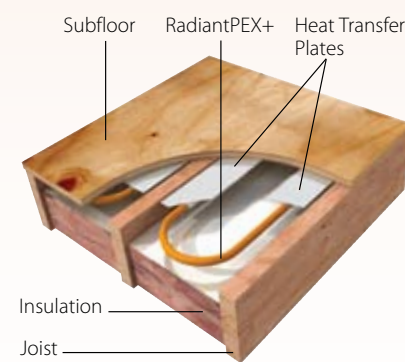


Install RadiantPEX+ for underfloor radiant systems using Watts Radiant heat transfer plates.

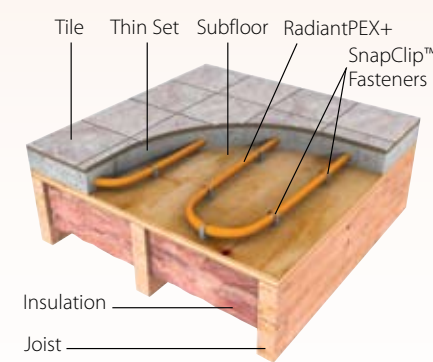

Install RadiantPEX+ in thin-slab systems using Watts Radiant's SnapClips, RailWays, or staples.

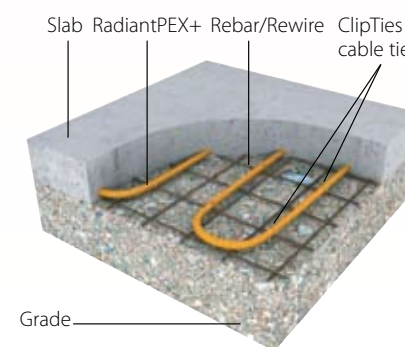

Install RadiantPEX+ in concrete slab and brick paver applications for snowmelting.

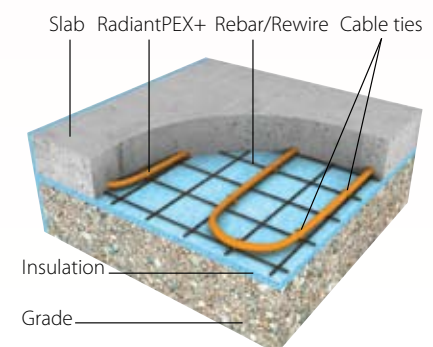


Install RadiantPEX+ in slab systems for radiant floor heating applications.

### RadiantPEX<sup>+</sup> Anatomy

### Silane Cross-linking is Better

We use the Silane cross-linking process in manufacturing our PEX. Our Superior Silane technology enables higher burst strengths and higher anti-oxidant protection than other PEX manufacturing methods. Silane manufacturing is the most widely used process to manufacture PEX, and has been proven world-wide for over 30 years.

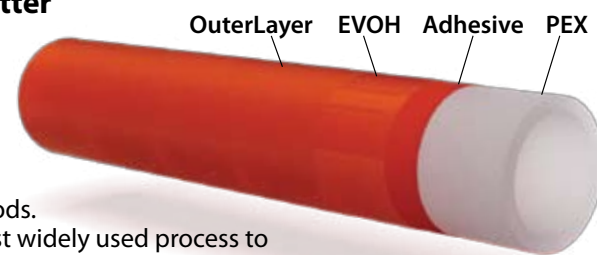

RadiantPEX+ is available in a wide range of sizes, coils, and stick configurations.