


Type of Appliance	Inbuilt convector, glass and steel fronted, ceramic log space heater with forced convection and power flue system	
Rinnai Model Number	<u>RHFE-750ETR-N (Natural gas)</u>	<u>RHFE-750ETR-P (Propane)</u>
AFUE (at minimum vent length)	76.3%	79.5%
AFUE (at maximum vent length)	81.8%	82.8%
Thermal Efficiency (Low Fire)	78%	82%
Thermal Efficiency (High Fire)	76%	78%
Gas Rate Input (BTU/hour)	Low - 11,000 High - 29,000	Low - 11,000 High - 28,000
Gas Rate Output (BTU/hour)	Low - 7,850 High - 21,900	Low - 8,050 High - 21,840
Minimum Gas Supply Pressure	4.3 inch (109 mm) W.C.	9.8 inch (249 mm) W.C.
Maximum Gas Supply Pressure	10.5 inch (267 mm) W.C.	13 inch (330 mm) W.C.
Electrical Connection	AC 120V, 60 Hz	
Gas Connection	Flex line: 3/8 inch flare nut; ball valve: 1/2 inch female x 3/8 inch flare	
Burners	Flame burners	
Ignition System	Electronic spark ignition	
Exhaust System	Forced combustion, forced convection	
Temperature Settings	Low (L): minimum combustion; High (H): maximum combustion; 60° - 80° F in 2° increments (16° - 26° C in 1° increments)	
Temperature Control	Electronic thermistor	
Warm Air Outlet	Bottom front louvers	
Warranty	All parts: 2 years from date of purchase	

DIMENSIONS - inches (mm)

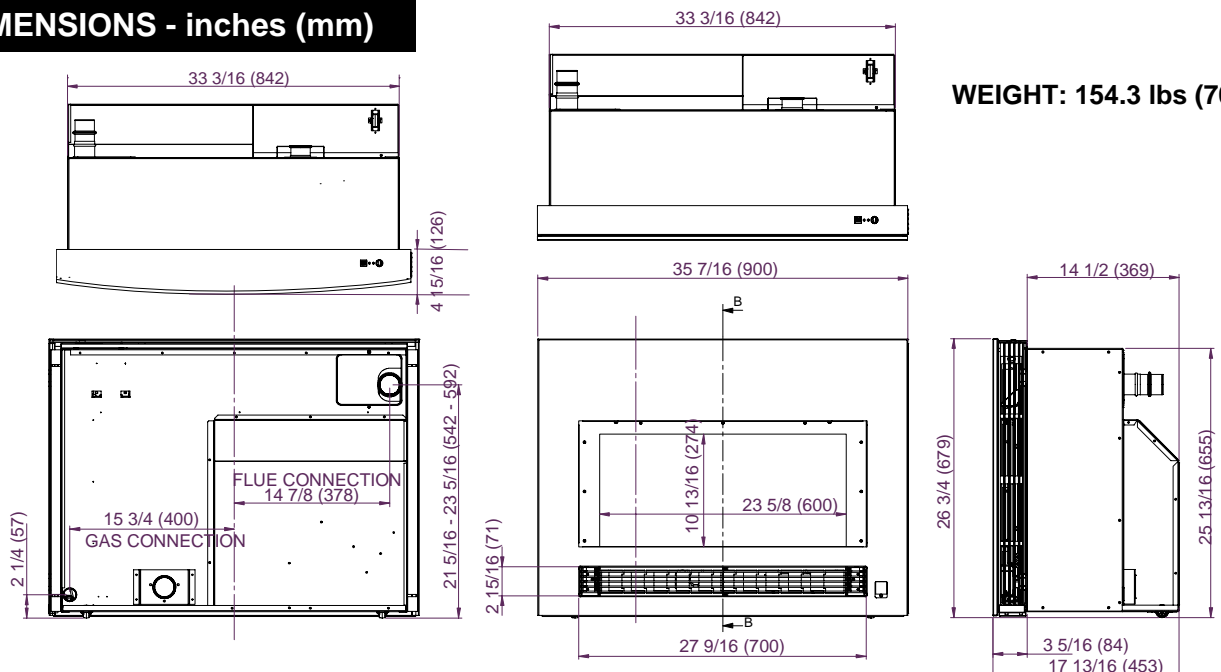

WEIGHT: 154.3 lbs (70 kg)

Available Flue Kits

FOT-203 - Flue Manifold Kit *	fits walls 4 1/3 - 9 1/2 in (110 - 240 mm) (included with appliance)
FOT-204 - Flue Manifold Kit *	fits walls 9 1/2 - 15 3/4 in (240 - 400mm)
FOT-102 - Extension Kit	Exhaust Pipe (adjustable) 11.4-20.3 in (290-515 mm)
FOT-103 - Extension Kit	Exhaust Pipe (adjustable) 21.0-39.6 in (533-1005 mm)
FOT-114 - Extension Kit	Exhaust Pipe 40 in (1016 mm) & Exhaust Pipe (adjustable) 21.0-39.6 in (533-1005 mm)
FOT-115 - Extension Kit	Elbow (flexible)

* Wall penetration hole: 3 1/2 in (90 mm)

Available Fascias (Front Panels)


Description	Part Number
Flat Metal - Black Front	R2700
Flat Metal - Stainless Steel Front	R2701
Radius Glass - Silver Front	R2702
Radius Glass - Black Front	R2703

Maximum Vent Length


no elbows	7.2 ft (2.2 m)
1 elbow	6.5 ft (2.0 m)
2 elbows	5.9 ft (1.8 m)

LOCATION


Enclosure Dimensions	
Width (w)	33.8 in (860 mm)
Height (h)	26.0 - 26.2 in (660-665 mm)
Depth (d)	15.0 - 16.9 in (380-430 mm)

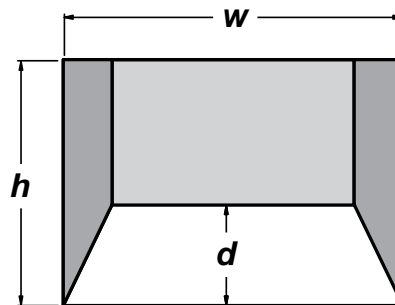

Enclosure Dimensions in a Corner	
x	63.8 in (1620 mm)
y	45.1 in (1146 mm)
z	31.9 in (810 mm)

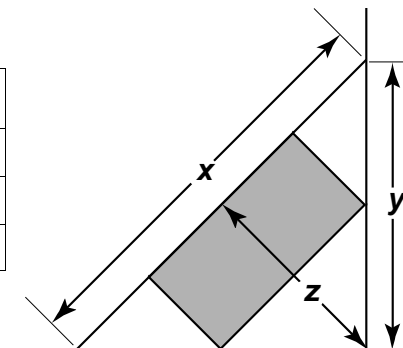

Clearances from the top

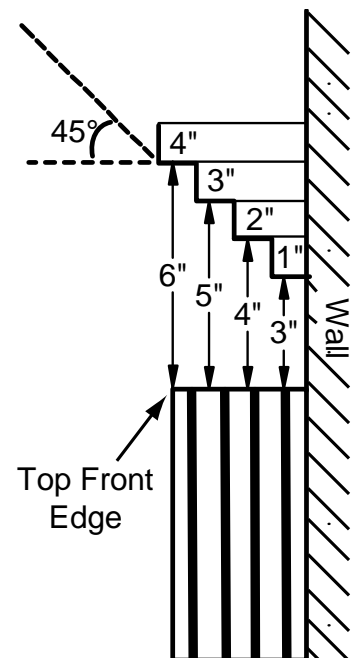

Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.