


ZDV3318/3622

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE



The Ultimate in Design, Engineering & Quality

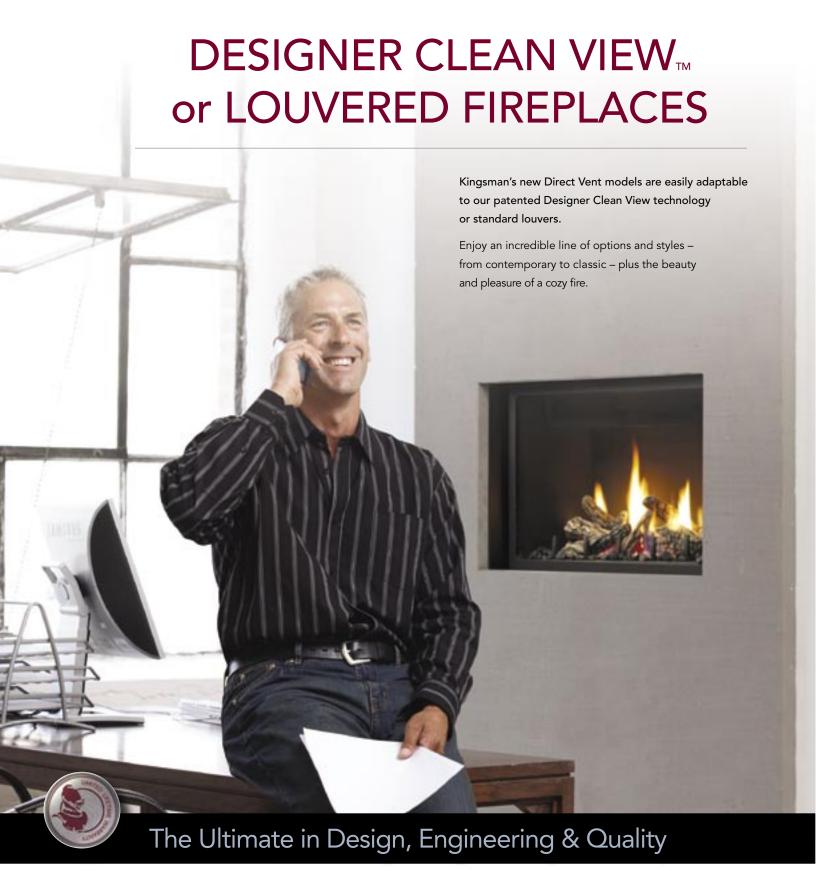


laces for New Home Construction or Renovation

YOUR BEST CHOICE FOR INSTALLATION ANYWHERE THROUGHOUT YOUR HOME.

CORNER FRAMING DIMENSIONS (INCHES)


LOUVERED			CLEAN VIEW CIRCULATING KIT (CVCK)		
	ZDV3318	ZDV3622		ZDV3318	ZDV3622
Α	433/4"	50 ¹⁵ /16"	А	48 ⁷ /8"	56"
В	33"	36 ³ /8"	В	337/8"	387/16"
С	321/2"	36"	С	339/16"	381/16"
D	53/8"	7 5/16"	D	71/2"	83/4"
Е	31"	36"	Е	349/16"	395/8"
F	81/2"	11"	F	81/2"	11"
G	12"	15 ¹ / ₄ "	G	12"	15 ⁵ /8"
Н	21 ⁷ /8"	251/2"	Н	247/16"	28"



UNIT AND FRAMING SPECIFICATIONS (INCHES)

TOP FLUE	Height		Front Width		Depth	
MODELS	Actual	Framing	Actual	Framing	Actual	Framing
LOUVERS						
ZDV3318	301/2"	31"	323/8"	33"	15 ³ /4"	151/4"
ZDV3622	331/2"	34"	36"	363/8"	1511/16"	151/4"
CLEAN VIEW CIRCULATING KIT (CVCK)						
ZDV3318	303/8"	333/8"	339/16"	337/8"	18 ³ /16"	173/4"
ZDV3622	333/4"	36 ³ /4"	381/16"	387/16"	1811/16"	173/4"

TOP FLUE MODELS	Width	Height
VIEWING AREA	4	
ZDV3318	25 ¹ /2"	145/16"
ZDV3622	293/4"	16 ¹ /8"





Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: The models ZDV3318 and ZDV3622 are certified for USA/Canada. Certified to: ANSI 221.88b-1999, CSA P4.1-02, CSA 2.33b-M99 Vented Gas Fireplace Heaters and CGA 2.17-M91 Gas Fireplace Appliances for use at high altitudes.

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Enjoy the elegance and warmth of glowing embers and dancing flames around our seven piece oak log set. It is sure to be the focal point of your home. Choose from a variety of decorative options to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 30 years of experience.

Here is a fireplace that has fully sealed combustion chamber with no pollution spillage to depreciate the indoor air quality of your home.

Model	ZDV3318N	ZDV3318LP	ZDV3622N	ZDV3622LP
Fuel	natural	propane	natural	propane
Input Max.	19,000 BTU	18,000 BTU	21,000 BTU	21,000 BTU
Input Min.	12,100 BTU	11,900 BTU	14,200 BTU	16,200 BTU
FE (P.4.1-02)	53.4%	51.4%	63.9%	60.2%
Efficiency	75%	75%	75%	75%

FEATURES*

- Hi/low Millivolt valve system, will operate during power failures
- Pan burner, with realistic campfire burn
- Mobile Home, Bedroom and Bed Sitting Room approved

OPTIONAL FEATURES

Fan Kit - Heat activated with variable speed control

Decorative Black Panels or Grills - Grills available in Black, Antique Brass Polish Brass, Chrome and Classic Series Black with Antique, Chrome, or Polish Brass accents

Designer Doors - Arch or Straight Black Doors, with Antique, Chrome, or Polish Brass Trims

Overlay Doors - Deluxe, Top Half, Double Arch and Double Door

Surrounds Wide - Polish Brass, Antique, Chrome or Black

Coverage - ZDV3318 - 31 $^{3}/_{16}$ " h x 36 $^{5}/_{8}$ " w

 $ZDV3622 - 34^{1}/4$ " h x $41^{1}/8$ " w

Surrounds Slim Line - Gun Metal Black, Antique, Chrome, Polish Brass

Coverage – ZDV3318 – 30⁷/₈" h x 33⁷/₈" w

ZDV3622 – 34¹/₄" h x 37¹/₂" w

Wall Mount Thermostat – Standard on/off or Programmable 5 day (weekday) and 2 day (weekend)

Remote Control - On/Off or Thermostat On/Off

Child Safety Screen

Porcelain Reflective Liner



2340 Logan Avenue Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960 www.kingsmanfireplaces.com



ZDV3318/3622

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE

